


Current Sensor



OUTLINE DRAWING

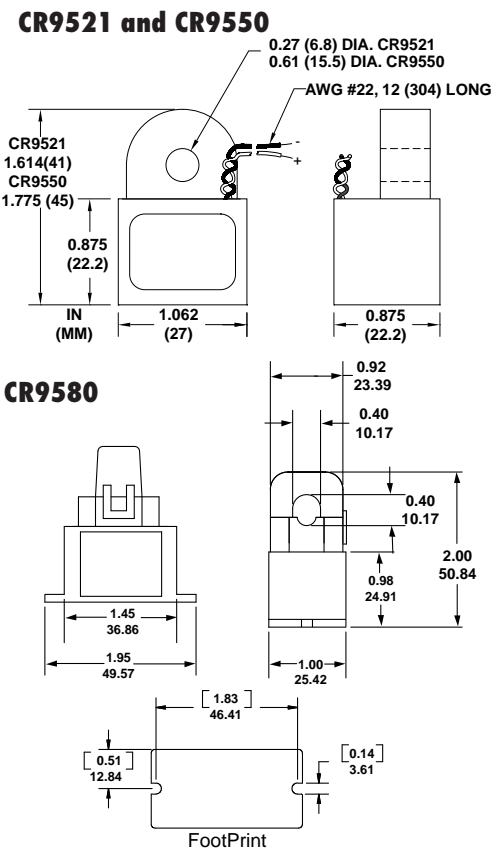

PART NUMBER						
CR				-		-

9521 .27" dia. Window 9550 .61" dia. Window 9580 .40" Splitcore	INPUT RANGE	M Mounting Case (optional)
	10	
	20	
	50	

The **CR9500** Series Current Sensors provides a cost effective method for monitoring electrical current. The sensor generates a 0-5 VDC signal proportional to the input AC current. The output signal is average sensing, calibrated to RMS. The sensor is used with process control and industrial instrumentation equipment. Especially suited for OEM applications that require a low cost solution for numerous monitoring locations. The DC output can be connected directly to an analog input connection without additional signal conditioning. Care must be taken to ensure the burden impedance of the instrumentation is greater than 1.0 megohm. The unit will operate with lower burden impedance but at reduced accuracy.

Applications
 OEM Current Sensing
 Home Automation
 Monitor Motor Operation

Features
 Low Cost
 Fully Isolated, Reverse Polarity Protected
 Self-Powered
 Available in Mountable Package Output
 Overload Protected

Specifications
 Accuracy: $\pm 0.5\%$ Full Scale (FS)
 Ripple: 1% Max
 Signal Out: 0-5 VDC
 Max. Signal Out: 12 VDC
 Frequency * : 50 to 400 Hz
 Insulation Class: 600 V
 Operating Temperature: -30 C to + 60 C
 Storage Temperature: -55 C to + 85 C
 Shipping Weight: 2 oz. (.06 Kg.)
 Dielectric Withstand: 2,500 Vrms
 Response Time: 250 ms. max. 10-90% FS
 Calibration: Avg. Sensing, RMS Calibrated
 Output Load: 1.0 Megohm or greater for rated accuracy
 Weight 0.11 LBS.
 * All specifications for operation at 60 Hz

Regulatory Agencies



D
Relays, Switches, & Sensors



3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119
 Web: <http://www.crmagnetics.com> 74 E-mail: sales@crmagnetics.com

