



### Main

Product or component type	EMC input filter
Range compatibility	Altivar 32 Lexium 32 Lexium 28 Lexium 52
Product compatibility	ATV32, 380...500 V, 0.37...1.5 kW LXM32, three-phase, line current 1.2...8.7 A
Product specific application	Radio interference input filter
Mounting location	At variable speed drive side
Network number of phases	Three phase

### Complementary

Cable length	<= 50 m conforming to IEC 61800-3 category C2 <= 20 m conforming to IEC 61800-3 category C1
[In] rated current	15 A
Thermal losses	9.9 W
Network rated voltage	380...500 V
Tolerance	- 15...10 %
Product weight	0.9 kg
Emc filter compatibility	Type 022


### Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0943 - <a href="#">Schneider Electric declaration of conformity</a>

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Additional EMC Input Filters

Mounting the Filter on the Side of the Servo Drive

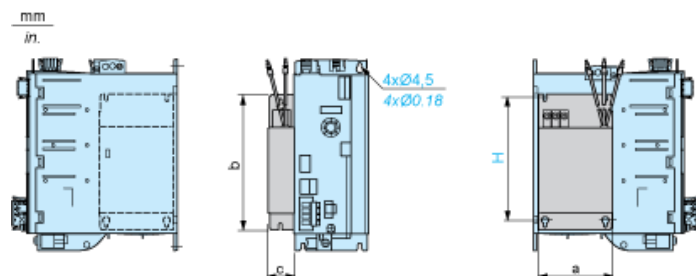

Dimensions in mm

a	b	c	H
107	195	42	180

Dimensions in in.

a	b	c	H
4.21	7.68	1.65	7.09