







Type overview	
Туре	DN
B280	80

### **Technical data**

Fı	ın	cti	io	nal	ld	ata

Valve size [mm]	3" [80]	
Fluid	chilled or hot water, up to 60% glycol	
Fluid Temp Range (water)	0212°F [-18100°C]	
Body Pressure Rating	400 psi	
Close-off pressure ∆ps	100 psi	
Flow characteristic	equal percentage	
Servicing	maintenance-free	
Flow Pattern	2-way	
Leakage rate	0% for A – AB	
Controllable flow range	75°	
Cv	170	
Cv Flow Rating	A-port: as stated in chart B-port: 70% of A – AB Cv	
Valve body	Nickel-plated brass body	
Spindle	stainless steel	

## Materials

Valve body	Nickel-plated brass body		
Spindle	stainless steel		
Spindle seal	EPDM (lubricated)		
Seat	PTFE		
Characterized disc	No Disc (full flow)		
Pipe connection	NPT female ends		
O-ring	EPDM (lubricated)		
Ball	stainless steel		
Non-Spring	ARB(X)		
Spring	AFRB(X)		

## Safety notes



Suitable actuators

 WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov


## **Product features**

## Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box reheat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.



## Flow/Mounting details



Two-way valves should be installed with the

disc upstream.	$A \rightarrow AB$	0%	$A \rightarrow A$	AB 100%		
Dimensions						
<b>Type</b> B280					<b>DN</b> 80	
ARB, ARX	HI F	D	B A		<b>.</b>	
	<b>A</b> 11.0" [280] 5.8"	<b>B C</b> '[148] 8.5" [2	<b>D</b> 17] 6.0" [152]	<b>E</b> 2.8" [71] 2.8	<b>F H1</b> 8" [71] 2.1" [53	<b>H2</b>
AFRB, AFRX					C	
	<b>A</b> 11.8" [299]	<b>B</b> 5.8" [148]	<b>C</b> 9.1" [231]	<b>D</b> 6.6" [168]	<b>E</b> 2.0" [51]	<b>F</b> 2.0" [51]
AFRB N4, AFRX N4	E F	0	B A		2.0 [31]	

В

5.8" [148]

13.0" [330]

C

10.3" [262]

3.4" [86]

Ε


3.4" [86]

9.4" [239]

H2

0.6" [15]



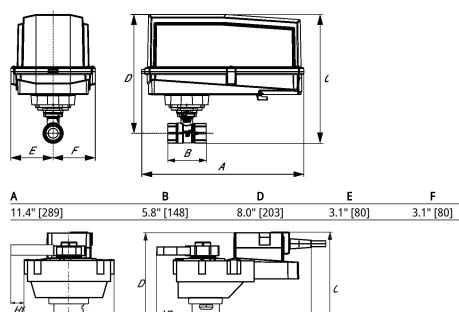

ARB N4, ARX N4, NRB N4, NRX N4





Technical data				
Electrical data	Nominal voltage	AC/DC 24 V		
	Nominal voltage frequency	50/60 Hz		
	Power consumption in operation	5 W		
	Power consumption in rest position	2.5 W		
	Transformer sizing	7.5 VA (class 2 power source)		
	Electrical Connection	18 GA appliance or plenum cables, 3 ft [1 m], 10 ft [3 m] or 16ft [5 m], with or without 1/2" conduit connector		
	Overload Protection	electronic throughout 095° rotation		
Functional data	Direction of motion motor	selectable by ccw/cw mounting		
	Direction of motion fail-safe	reversible with cw/ccw mounting		
	Manual override	5 mm hex crank (3/16" Allen), supplied		
	Angle of rotation	90°		
	Running Time (Motor)	75 s / 90°		
	Running time fail-safe	<20 s @ 20°C		
	Noise level, motor	45 dB(A)		
	Noise level, fail-safe	62 dB(A)		
	Position indication	Mechanical		
Safety data	Degree of protection IEC/EN	IP54		
	Degree of protection NEMA/UL	NEMA 2		
	Enclosure	UL Enclosure Type 2		
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU and 2014/35/EU; Listed to UL 2043 - suitable for use in air plenums per Section 300.22(c) of the NEC and Section 602.2 of the IMC		
	Quality Standard	ISO 9001		
	Ambient temperature	-22122°F [-3050°C]		
	Storage temperature	-40176°F [-4080°C]		
	Ambient humidity	Max. 95% RH, non-condensing		
	Servicing	maintenance-free		
Materials	Housing material	Galvanized steel and plastic housing		

**Footnotes** †Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

## **Electrical installation**



INSTALLATION NOTES

A Actuators with appliance cables are numbered.
Provide overload protection and disconnect as required.

Actuators may also be powered by DC 24 V.

Actuators may be powered in parallel. Power consumption must be observed.

Parallel wiring required for piggy-back applications.

Meets cULus requirements without the need of an electrical ground connection.

# 

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

# Wiring diagrams

On/Off 24 VAC Transformer