







Technical data

Functional data	Valve Size	2" [50]	
	Fluid	chilled or hot water, up to 60% glycol	
	Fluid Temp Range (water)	0250°F [-18120°C]	
	Body Pressure Rating	400 psi	
	Close-off pressure ∆ps	200 psi	
	Flow characteristic	A-port equal percentage, B-port modified for constant common port flow	
	Servicing	maintenance-free	
	Flow Pattern	3-way Mixing/Diverting	
	Leakage rate	0% for A – AB, <2.0% for B – AB	
	Controllable flow range	75°	
	Cv	37	
	Body pressure rating note	400 psi	
	Cv Flow Rating	A-port: as stated in chart B-port: 70% of A – AB Cv	
Materials	Valve body	Nickel-plated brass body	
	Stem seal	EPDM (lubricated)	
	Seat	PTFE	
	Pipe connection	NPT female ends	
	O-ring	EPDM (lubricated)	
	Ball	stainless steel	
Suitable actuators	Non-Spring	ARB(X)	
atos			

Safety notes



• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov


Product features

Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.



Technical data sheet

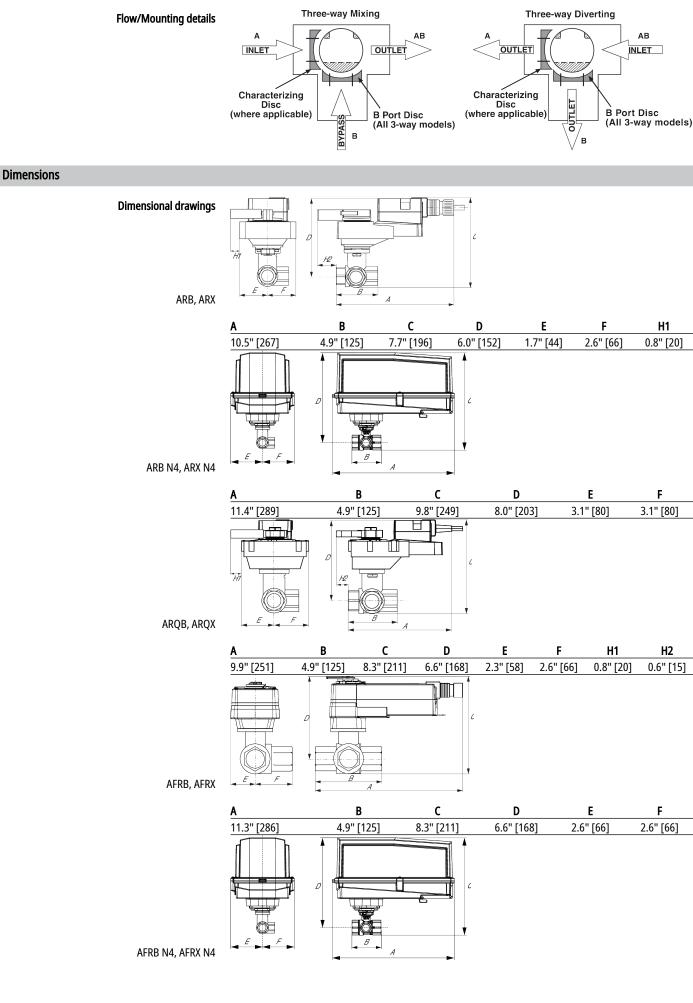



Tachni	60	data sheet	
			-



	A	В	с	D	E	F
	13.0" [330]	4.9" [125]	11.8" [300]	9.9" [251]	3.7" [95]	3.7" [95]
	Α	В	С	D	E	F
	11.3" [286]	4.9" [125]	8.3" [211]	6.6" [168]	2.6" [66]	2.6" [66]
ARQB, ARQX						
	A	B C	D	E	F H1	H2
	9.9" [251] 4.9"	[125] 8.3" [211]	6.6" [168]	2.3" [58] 2	2.6" [66] 0.8" [20]	0.6" [15]
AFRB N4, AFRX N4						
	Α	В	С	D	E	F
	13.0" [330]	4.9" [125]	11.8" [300]	9.9" [251]	3.7" [95]	3.7" [95]



or 4...20 mA Control Signal

Modulating, Spring Return, AC 24 V for DC 2...10 V

Technical data sheet

AFRB24-SR



Technical data

Electrical data	Nominal voltage	AC/DC 24 V		
	Nominal voltage frequency	50/60 Hz		
	Power consumption in operation	5.5 W		
	Power consumption in rest position	3 W		
	Transformer sizing	8.5 VA (class 2 power source)		
	Electrical Connection	18 GA appliance cable, 3 ft [1 m], with 1/2" conduit connector		
	Overload Protection	electronic throughout 095° rotation		
Functional data	Operating range Y	210 V		
	Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)		
	Input Impedance	100 k Ω for 210 V (0.1 mA), 500 Ω for 420 mA		
	Position feedback U	210 V		
	Position feedback U note	Max. 0.5 mA		
	Direction of motion motor	selectable with switch		
	Direction of motion fail-safe	reversible with cw/ccw mounting		
	Manual override	5 mm hex crank (3/16" Allen), supplied		
	Angle of rotation	90°		
	Running Time (Motor)	95 s		
	Running time fail-safe	<20 s		
	Noise level, motor	45 dB(A)		
	Noise level, fail-safe	62 dB(A)		
	Position indication	Mechanical		
Safety data	Degree of protection IEC/EN	IP54		
	Degree of protection NEMA/UL	NEMA 2 UL Enclosure Type 2		
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU and 2014/35/ EU; Listed to UL 2043 - suitable for use in air plenums per Section 300.22(c) of the NEC and Section 602.2 of the IMC		
	Quality Standard	ISO 9001		
	Ambient temperature	-22122°F [-3050°C]		
	Storage temperature	-40176°F [-4080°C]		
	Ambient humidity	max. 95% r.H., non-condensing		
	Servicing	maintenance-free		
Weight	Weight	5.4 lb [2.4 kg]		

Electrical installation

\swarrow installation notes



Technical data sheet

(A) Actuators with appliance cables are numbered.

/1 Provide overload protection and disconnect as required.

3 Actuators may also be powered by 24 VDC.

 $\overline{5}$ Only connect common to negative (-) leg of control circuits.


 Λ 500 Ω resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.

Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

Meets cULus requirements without the need of an electrical ground connection.

Warning! Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.



2...10 V / 4...20 mA Control