G225, 2-Way, Globe Valve, Bronze Trim



ApplicationThis valve is typically used in Air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in hydronic system with variable flow. Bronze and stainless steel trim valves can be used for steam applications, depending on actuator and close-off combinations.


NFB(X)

Electronic Fail-Safe

SVKB(X)



SVB(X)

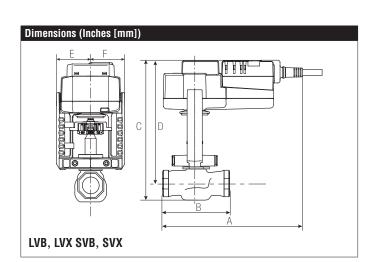

-						
	A	В	C	D	E	F
_	8" [203]	4.65" [118]	9.5" [241]	8.35" [212]	1.95	" [49]


Piping

The valves should be mounted in a weather-protected area in a location that is within the ambient limits of the actuator. Allow sufficient room for valve with actuator and for service. The G2(S) and G3(D) preferred mounting position of the valve is with the valve stem vertical above the valve body, for maximum life. However, the assemblies can be mounted with the valve stem vertical or horizontal in relation to the pipe. The actuators should never be mounted underneath the valve, as condensation can build up and result in a failure of the actuators. Do not reverse flow direction.







chilled or hot water, up to 60% glycol,
steam
equal percentage
stem up - open A to AB
1" [25]
NPT female ends
bronze
stainless steel
spring loaded Teflon V-ring
bronze
brass
composition (EPDM)
ANSI 250
ANSI 250 (up to 400 psi below 150°F)
35 psi (241 kPa)
20°F to 280°F [-7°C to 138°C]
32°F to 280°F [0°C to 138°C]
20 psi (103 kPa)
35 psi (241 kPa)
ANSI Class IV
75:1
14
3.1 lb [1.4 kg]
Repack/Rebuild kits available

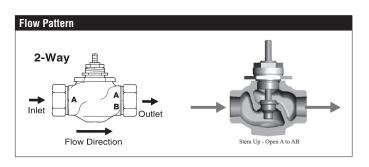

G225, 2-Way, Globe Valve, Bronze Trim

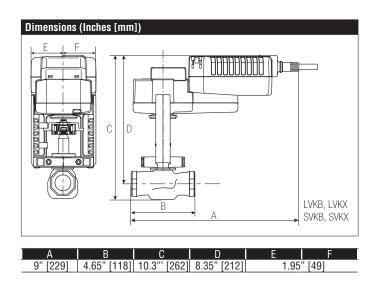

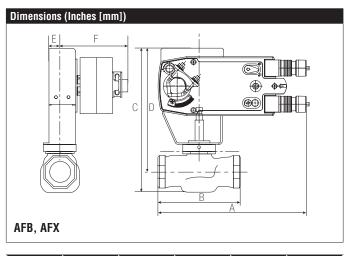



Technical Data				
Power Supply	24240 VAC -20% / +10%, 50/60 Hz,			
	24125 VDC ±10%			
Power Consumption Running	6 W			
Power Consumption Holding	2.5 W			
Transformer Sizing	6 VA @ 24 VAC (class 2 power source), 6.5 VA @ 120 VAC, 9.5 VA @ 240 VAC			
Shaft Diameter	1/2" to 1.05" round, centers on 1/2" and 3/4" with insert, 1.05" without insert			
Electrical Connection	(2) 3 ft [1 m], 18 GA appliance cables with 1/2" conduit connectors			
Overload Protection	electronic throughout 0° to 95° rotation			
Angle of Rotation	95° (adjustable with mechanical end stop, 35° to 95°)			
Torque	90 in-lbs [10 Nm] minimum			
Direction of Rotation (Motor)	reversible with built-in switch			
Direction of Rotation (Fail-Safe)	reversible with CW/CCW mounting			
Position Indication	visual indicator, 0° to 95° (0° is full spring return position)			
Manual Override	5 mm hex crank (3/16" Allen), supplied			
Running Time (Motor)	<75 sec			
Running Time (Fail-Safe)	20 sec @ -4°F to +122°F [-20°C to +50°C], <60 sec @ -49°F [-45°C]			
Humidity	max. 95% RH non-condensing			
Ambient Temperature Range	-22°F to 122°F [-30°C to 50°C]			
Storage Temperature Range	-40°F to 176°F [-40°C to 80°C]			
Housing	NEMA 2, IP54, UL enclosure type 2			
Agency Listings†	UL 873 listed, CSA C22.2 No. 24 certified			
Sound power level	<50 dB (A)			
Noise Level (Fail-Safe)	<62 dB (A)			
Servicing	maintenance free			
Quality Standard	ISO 9001			
Weight	4.4 lb [2 kg]			
Auxiliary Switch	2 x SPDT 3A resistive (0.5A inductive) @ 120			
-	VAC, one fixed at +10°, one fixed at 80°			

 $\label{thm:control} \mbox{\uparrowRated Impulse Voltage 4kV, Type of Action 1.AA.B, Control Pollution Degree 3.}$





Wiring Diagrams



X INSTALLATION NOTES



Actuators with appliance cables are numbered.



Universal Power Supply (UP) models can be supplied with 24 VAC up to 240 VAC, or 24 VDC up to 125 VDC.



Provide overload protection and disconnect as required.



Two built-in auxiliary switches (2x SPDT), for end position indication, interlock control, fan startup, etc.



Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or combined operation of line voltage/safety extra low voltage is not allowed.



APPLICATION NOTES



Meets cULus requirements without the need of an electrical ground connection.



WARNING! LIVE ELECTRICAL COMPONENTS!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

