









Technical data

					ata
 411	LU	u	IIa	u	ala

Valve Size	1.25" [32]		
Fluid	chilled or hot water, up to 60% glycol		
Fluid Temp Range (water)	0250°F [-18120°C]		
Body Pressure Rating	400 psi		
Close-off pressure Δps	200 psi		
Flow characteristic	A-port equal percentage, B-port modified for constant common port flow		
Servicing	maintenance-free		
Flow Pattern	3-way Mixing/Diverting		
Leakage rate	0% for A – AB, <2.0% for B – AB		
Controllable flow range	75°		
Cv	25		
Body pressure rating note	400 psi		
Cv Flow Rating	A-port: as stated in chart B-port: 70% of A – AB Cv		
Valve body	Nickel-plated brass body		
Stem seal	EPDM (lubricated)		
Seat	PTFE		
Pipe connection	NPT female ends		
O-ring	EPDM (lubricated)		
Ball	stainless steel		

Safety notes



Suitable actuators

Non-Spring

Materials

 WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

ARB(X)


Product features

Application


This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.




Flow/Mounting details

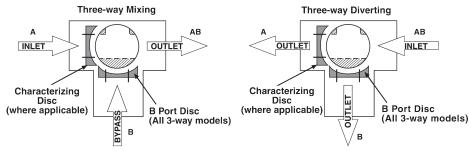

Dimensions

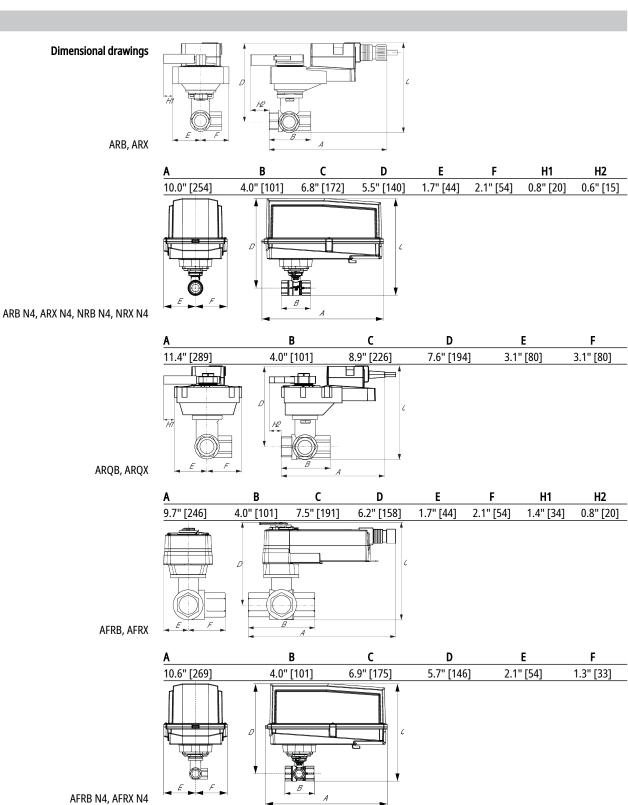



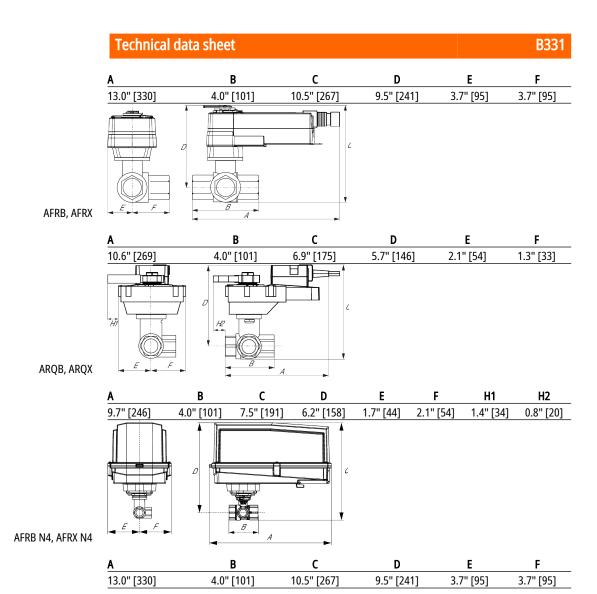



On/Off, Floating Point, Non-Spring Return, 24 V







Electrical data Nominal voltage Nominal voltage frequency Power consumption in operation Power consumption in rest position Transformer sizing Ac/DC 24 V Power consumption in operation D.5 W Transformer sizing Transformer sizing Auxiliary switch Tx SPDT, 3 A resistive (0.5 A inductive adjustable 0100% Switching capacity auxiliary switch Accepted a Ac/DC 24 V Accepted Biographic Subjects Accepted Biographic Subj	50 V uit connector,	
Nominal voltage frequency Power consumption in operation Power consumption in rest position Transformer sizing Auxiliary switch Switching capacity auxiliary switch Electrical Connection Nominal voltage frequency 2.5 W 0.5 W 1 x SPDT, 3 A resistive (0.5 A inductive adjustable 0100% Switching capacity auxiliary switch 18 GA plenum cable with 1/2" condudegree of protection NEMA 2 / IP54, [3 m] and 16ft [5 m]	50 V uit connector,	
Power consumption in rest position Transformer sizing 5.5 VA (class 2 power source) Auxiliary switch 1 x SPDT, 3 A resistive (0.5 A inductive) adjustable 0100% Switching capacity auxiliary switch 3 A resistive (0.5 A inductive) @ AC 2! Electrical Connection 18 GA plenum cable with 1/2" conductive degree of protection NEMA 2 / IP54, [3 m] and 16ft [5 m]	50 V uit connector,	
Power consumption in rest position Transformer sizing 5.5 VA (class 2 power source) Auxiliary switch 1 x SPDT, 3 A resistive (0.5 A inductive) adjustable 0100% Switching capacity auxiliary switch 3 A resistive (0.5 A inductive) @ AC 2! Electrical Connection 18 GA plenum cable with 1/2" conductive degree of protection NEMA 2 / IP54, [3 m] and 16ft [5 m]	50 V uit connector,	
Auxiliary switch 1 x SPDT, 3 A resistive (0.5 A inductive adjustable 0100% Switching capacity auxiliary switch 3 A resistive (0.5 A inductive) @ AC 2! Electrical Connection 18 GA plenum cable with 1/2" conductive adjustable of protection NEMA 2 / IP54, [3 m] and 16ft [5 m]	50 V uit connector,	
adjustable 0100% Switching capacity auxiliary switch Electrical Connection 18 GA plenum cable with 1/2" condudegree of protection NEMA 2 / IP54, [3 m] and 16ft [5 m]	50 V uit connector,	
Electrical Connection 18 GA plenum cable with 1/2" condu degree of protection NEMA 2 / IP54, [3 m] and 16ft [5 m]	uit connector,	
degree of protection NEMA 2 / IP54, [3 m] and 16ft [5 m]		
Overload Protection electronic thoughout 090° rotation	. 3 ft [1 m] 10 ft	
<u>· · · · · · · · · · · · · · · · · · · </u>	1	
Functional data Input Impedance 600Ω		
Direction of motion motor selectable with switch 0/1		
Manual override external push button		
Angle of rotation 90°		
Angle of rotation note adjustable with mechanical stop		
Running Time (Motor) default 90 s, variable 90 or 150 s		
Running time motor variable 90 or 150 s		
Noise level, motor 45 dB(A)		
Position indication Mechanically, pluggable		
Safety data Degree of protection IEC/EN IP54	IP54	
Degree of protection NEMA/UL NEMA 2 UL Enclosure Type 2		
Agency Listing cULus acc. to UL60730-1A/-2-14, CAN E60730-1:02, CE acc. to 2014/30/EU a EU; Listed to UL 2043 - suitable for us plenums per Section 300.22(c) of the Section 602.2 of the IMC	and 2014/35/ se in air	
Quality Standard ISO 9001		
Ambient temperature -22122°F [-3050°C]		
Storage temperature -40176°F [-4080°C]		
Ambient humidity max. 95% r.H., non-condensing		
Servicing maintenance-free		
Weight Weight 2.4 lb [1.1 kg]		

Safety notes

Technical data sheet ARX24-3-S



- NEMA 4X, 316L stainless steel enclosure.
- Battery Back Up System for SY(7~10)-110
- ZS-300 without brackets.
- Terminal-strip cover for NEMA 2 rating (-T models).
- MFT95 resistor kit for 4 to 20 mA control applications.
- Battery Back Up System for SY(10~12)-220P

Electrical installation

> INSTALLATION NOTES

1 Provide overload protection and disconnect as required.

2\ Actuators may be connected in parallel. Power consumption and input impedance must be observed.

Actuators may also be powered by 24 VDC.

Actuators Hot wire must be connected to the control board common. Only connect common to neg. (-) leg of control circuits. Terminal models (-T) have no-feedback.

 $\frac{1}{18}$ Actuators with plenum cable do not have numbers; use color codes instead.

44. One built-in auxiliary switch (1x SPDT), for end position indication, interlock control, fan startup, etc.


The poly only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or

combined operation of line voltage/safety extra low voltage is not allowed.


Meets cULus requirements without the need of an electrical ground connection.


Warning! Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

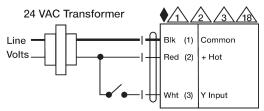


On/Off

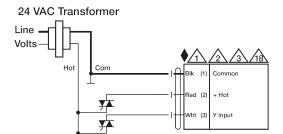




Auxiliary Switches

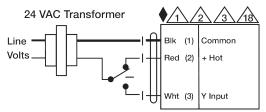

Floating Point

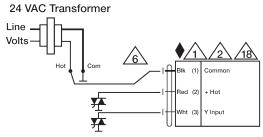

Floating Point - Triac Sink