

Ball Valve (VSS), 2", 2-way, Cv 108

- NSF/ANSI 61 – Water Quality – C. Hot
- NSF/ANSI 372 - Lead Free



2-year warranty

### Type overview

|             |           |
|-------------|-----------|
| <b>Type</b> | <b>DN</b> |
| B249VSS     | 50        |

### Technical data


|                           |                                   |   |
|---------------------------|-----------------------------------|---|
| <b>Functional data</b>    | Valve size [mm]                   | 2" [50]                                       |
|                           | Fluid                             | chilled or hot water, up to 60% glycol, steam |
|                           | Fluid Temp Range (water)          | -30...148°C [-22...298°F]                     |
|                           | Body Pressure Rating              | 1500 psig WOG                                 |
|                           | Close-off pressure Δps            | 1000 psi                                      |
|                           | Flow characteristic               | modified equal percentage                     |
|                           | Leakage rate                      | ANSI Class VI                                 |
|                           | Pipe connection                   | Internal thread<br>NPT (female)               |
|                           | Max Differential Pressure (Steam) | 50 psi  |
|                           | Flow Pattern                      | 2-way   |
|                           | Controllable flow range           | 90° rotation, A – AB open ccw, B – AB open cw |
|                           | Cv                                | 108   |
|                           | Maximum Inlet Pressure (Steam)    | 50 psi  |
|                           | Maximum Velocity                  | 15 FPS  |
|                           | <b>Materials</b>                  | Valve body                                    |
| Housing seal              |                                   | PTFE  |
| Stem                      |                                   | 316 stainless steel                           |
| Stem seal                 |                                   | RPTFE   |
| Seat                      |                                   | RPTFE   |
| Lock nut                  |                                   | stainless steel                               |
| Ball                      |                                   | 316 stainless steel                           |
| <b>Suitable actuators</b> | Non Fail-Safe                     | GMB(X)<br>PRB(X)                              |
|                           | Spring                            | AF  |
|                           | Electrical fail-safe              | PKRB(X)                                       |

Note: NSF/ANSI/CAN 61 Section 8, Annex G, NSF/ANSI 372 - Drinking Water System Components - Lead Content. Suitable for Cold, Domestic Hot, and Commercial Hot applications.

**Product features**


**Application** These threaded valves are designed to provide modulating or two position control of hot or chilled water and saturated steam systems under 50 psi.  
 Typical applications include reheat coils, VAV terminal control, unit ventilators, and air handlers, especially in areas which have minimum profile requirements.  
 Up to 50 psi steam  
 1/2" - 2000 PSIG WOG, Cold Non-Shock  
 Federal Specification: WW-V-35C, Type II  
 Composition: SS  
 Style: 3

**Flow/Mounting details**

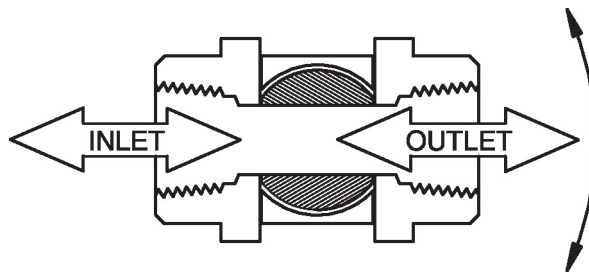

**Dimensions**

| Type    | DN | Weight          |
|---------|----|-----------------|
| B249VSS | 50 | 6.2 lb [2.8 kg] |

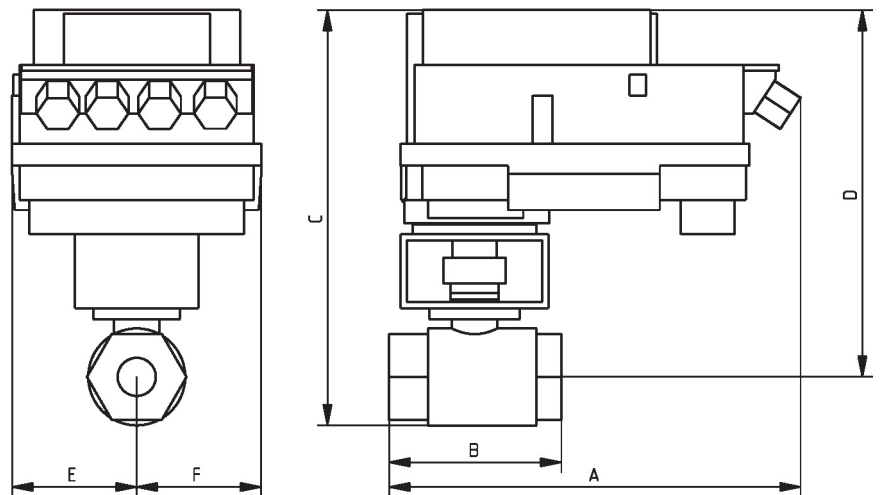

B249VSS+PKR..

| A           | B          | C           | D           | E          | F          |
|-------------|------------|-------------|-------------|------------|------------|
| 12.8" [325] | 5.5" [140] | 13.3" [337] | 11.7" [298] | 4.0" [102] | 4.0" [102] |

MFT/programmable, Spring return, 24 V



5-year warranty



## Technical data

|                        |                                     |   |
|------------------------|-------------------------------------|---|
| <b>Electrical data</b> | Nominal voltage                     | AC/DC 24 V  |
|                        | Nominal voltage frequency           | 50/60 Hz  |
|                        | Nominal voltage range               | AC 19.2...28.8 V / DC 21.6...28.8 V   |
|                        | Power consumption in operation      | 7.5 W   |
|                        | Power consumption in rest position  | 3 W   |
|                        | Transformer sizing                  | 20 VA   |
|                        | Auxiliary switch                    | 2x SPDT, 1 mA...3 A (0.5 A inductive), DC 5 V...AC 250 V, 1x 10% / 1x 11...90%                                  |
|                        | Switching capacity auxiliary switch | 1 mA...3 A (0.5 A inductive), DC 5 V...AC 250 V   |
|                        | Electrical Connection               | (2) 18 GA appliance cables, 3 ft [1 m], 10 ft [3 m] or 16 ft [5 m], with or without 1/2" NPT conduit connectors |
|                        | Overload Protection                 | electronic throughout 0...95° rotation  |
| <b>Functional data</b> | Operating range Y                   | 2...10 V  |
|                        | Operating range Y note              | 4...20 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)   |
|                        | Input impedance                     | 100 kΩ for 2...10 V (0.1 mA), 500 Ω for 4...20 mA, 1500 Ω for PWM, On/Off and Floating point                    |
|                        | Operating range Y variable          | Start point 0.5...30 V<br>End point 2.5...32 V  |
|                        | Operating modes optional            | variable (VDC, PWM, on/off, floating point)   |
|                        | Position feedback U                 | 2...10 V  |
|                        | Position feedback U note            | Max. 0.5 mA   |
|                        | Position feedback U variable        | VDC variable  |
|                        | Direction of motion motor           | selectable with switch 0/1  |
|                        | Direction of motion fail-safe       | reversible with cw/ccw mounting   |
|                        | Manual override                     | 5 mm hex crank (3/16" Allen), supplied  |
|                        | Angle of rotation                   | 95°   |
|                        | Angle of rotation note              | adjustable with mechanical end stop, 35...95°   |
|                        | Running Time (Motor)                | 150 s / 90°   |
|                        | Running time motor variable         | 70...220 s  |
|                        | Running time fail-safe              | <20 s   |
|                        | Override control                    | MIN (minimum position) = 0%<br>MID (intermediate position) = 50%<br>MAX (maximum position) = 100%               |
|                        | Noise level, motor                  | 40 dB(A)  |
| Noise level, fail-safe | 62 dB(A)                            |   |

**Technical data**

|                        |                              |   |
|------------------------|------------------------------|---|
| <b>Functional data</b> | Position indication          | Mechanical  |
| <b>Safety data</b>     | Power source UL              | Class 2 Supply  |
|                        | Degree of protection IEC/EN  | IP54  |
|                        | Degree of protection NEMA/UL | NEMA 2  |
|                        | Enclosure                    | UL Enclosure Type 2   |
|                        | Agency Listing               | cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU                  |
|                        | Quality Standard             | ISO 9001  |
|                        | UL 2043 Compliant            | Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC |
|                        | Ambient humidity             | Max. 95% RH, non-condensing   |
|                        | Ambient temperature          | -22...122°F [-30...50°C]  |
|                        | Storage temperature          | -40...176°F [-40...80°C]  |
|                        | Servicing                    | maintenance-free  |
| <b>Weight</b>          | Weight                       | []  |
| <b>Materials</b>       | Housing material             | Galvanized steel and plastic housing  |

**Footnotes** \*Variable when configured with MFT options.

**Accessories**

| <b>Gateways</b>               | <b>Description</b>  | <b>Type</b> |
|-------------------------------|---|-------------|
|                               | Gateway MP to BACnet MS/TP  | UK24BAC     |
|                               | Gateway MP to Modbus RTU  | UK24MOD     |
|                               | Gateway MP to LonWorks  | UK24LON     |
| <b>Electrical accessories</b> | <b>Description</b>  | <b>Type</b> |
|                               | Service tool, with ZIP-USB function, for programmable and communicative Belimo actuators, VAV controller and HVAC performance devices | ZTH US      |
| <b>Tools</b>                  | <b>Description</b>  | <b>Type</b> |
|                               | Connecting cable 10 ft [3 m], A: RJ11 6/4 ZTH EU, B: 3-pin Weidmüller and supply connection   | ZK4-GEN     |
|                               | Service tool, with ZIP-USB function, for programmable and communicative Belimo actuators, VAV controller and HVAC performance devices | ZTH US      |

**Electrical installation**

**Warning! Live electrical components!**

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.



Meets cULus requirements without the need of an electrical ground connection.



Actuators with appliance cables are numbered.



Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or combined operation of line voltage/safety extra low voltage is not allowed.



Provide overload protection and disconnect as required.




Actuators may also be powered by DC 24 V.

- ▲4 Two built-in auxiliary switches (2x SPDT), for end position indication, interlock control, fan startup, etc.
- ▲5 Only connect common to negative (-) leg of control circuits.
- ▲7 A 500 Ω resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.
- ▲8 Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 V line.
- ▲10 For triac sink the Common connection from the actuator must be connected to the Hot connection of the controller. Position feedback cannot be used with a triac sink controller; the actuator internal common reference is not compatible.
- ▲12 IN4004 or IN4007 diode. (IN4007 supplied, Belimo part number 40155).
- ▲46 Actuators may be controlled in parallel. Current draw and input impedance must be observed.
- ▲47 Master-Slave wiring required for piggy-back applications. Feedback from Master to control input(s) of Slave(s).

**Wiring diagrams**


On/Off

24 VAC Transformer

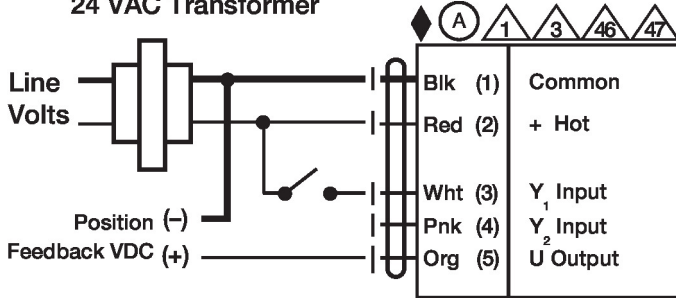


Floating Point

24 VAC Transformer (AC Only)

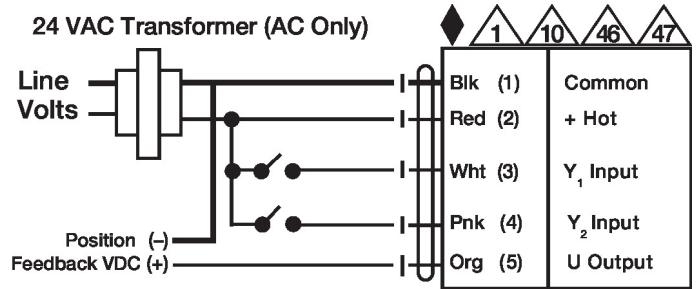


VDC/mA Control

24 VAC Transformer

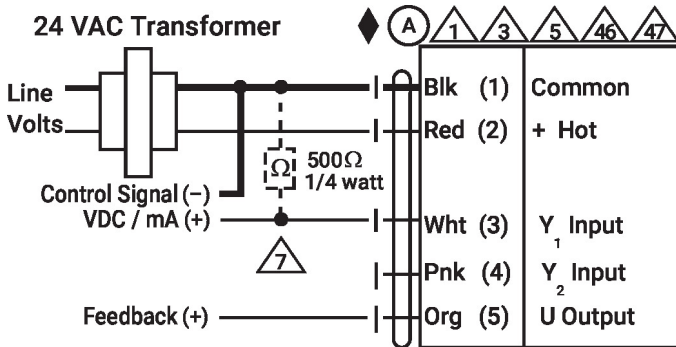


PWM Control

24 VAC Transformer (AC only)

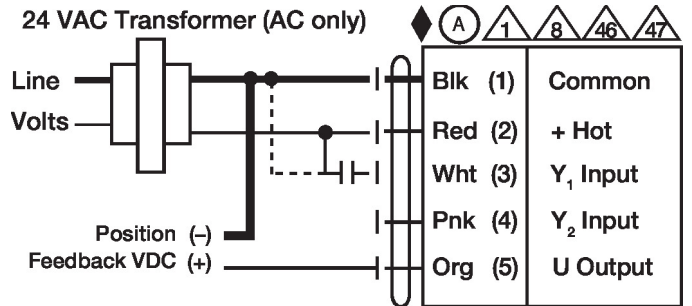


Override Control

24 VAC Transformer (AC Only)

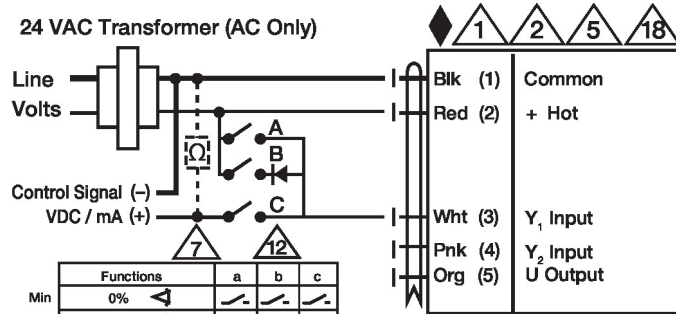

| Functions | a                                   | b | c |
|-----------|-------------------------------------|---|---|
| Min       | 0%                                  | ↔ | ↔ |
| Mid       | 50%                                 | ↔ | ↔ |
| Max       | 100%                                | ↔ | ↔ |
| Normal    | Control mode acc. to Y <sub>1</sub> | ↔ | ↔ |

Primary - Secondary

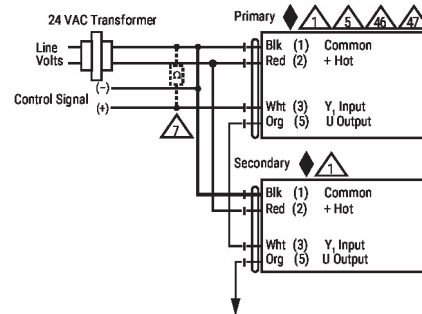

**Electrical installation****Wiring diagrams**

Auxiliary Switches

