




5-year warranty




Technical data

Functional data	Valve Size	10" [250]
	Fluid	chilled or hot water, up to 60% glycol
	Fluid Temp Range (water)	-22...250°F [-30...120°C]
	Close-off pressure Δps	200 psi
	Servicing	maintenance-free
	Flow Pattern	2-way
	Leakage rate	0%
	Controllable flow range	90° rotation
	Cv	5340
	Maximum Velocity	12 FPS
	Lug threads	7/8-9 UNC
	Materials	Valve body
Body finish		epoxy powder coating (blue RAL 5002)
Spindle		416 stainless steel
Spindle seal		EPDM (lubricated)
Seat		EPDM
Pipe connection		for use with ANSI class 125/150 flanges
Bearing		RPTFE
Disc		304 stainless steel
	Gear operator materials	Gears - hardened steel

Product features

Flow/Mounting details

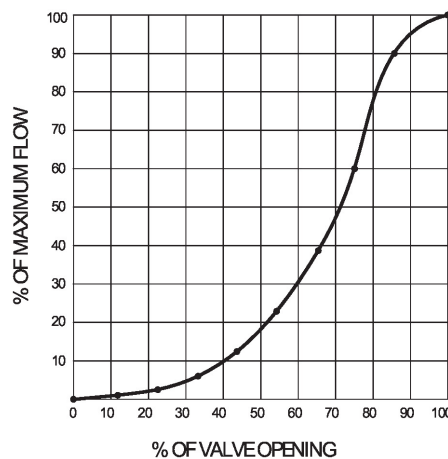

Dimensions

Dimensional drawings

