


Braeburn®

7300 1 Heat / 1 Cool Conventional or Heat Pump Smart Wi-Fi Universal Thermostat



BlueLink
smart connect

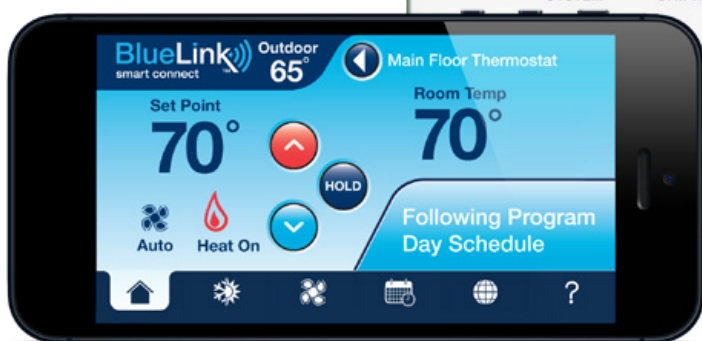

Phone not included.

Wi Fi

Thermostat Features

- 7 Day, 5-2 Day or Non-Programmable
- Large 5 sq. in. Backlit Display
- Bright Blue Backlight Display
- Auto or Manual Changeover
- Residential or Commercial Modes
- Adjustable Temperature Limits
- Wired Remote Sensing
- Auxiliary Heat Fossil Fuel Option
- Hardwire or Battery Powered
- Programmable and Circulating Fan Modes
- Common "C" wire required to use Wi-Fi

Application Features

- Compatible with Virtually All Smartphones, Tablets or PC's
- Multi-Color Program Groups Simplify Scheduling
- Text and E-Mail Service and Temperature Alerts
- BlueLink QuickCopy® Allows User to Duplicate Program and Configuration to Other Thermostats
- QuickEdit® Makes Schedule Changes Easy
- BlueLink SmartData® Energy Report Capability
- Monitor and Control Multiple Thermostats
- View Outdoor Temperature*
- Easy Access Dealer Information
- Optional Geofencing for Increased Energy Savings



FREE Color Contractor Branding!
Visit braeburnonline.com

Compatible with Amazon Alexa

Amazon Alexa is a trademark of Amazon.com, Inc.

www.bluelinksmartconnect.com

*Optional sensor required.

Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)

BlueLink Smart Connect® Application Screens

Multi-Color Program Groups

Simplifies program scheduling by allowing user to group days and walk through programming set points, times and temperatures quickly and easily.



BlueLink SmartData® Energy Reports


Gives the user the capability of retrieving usage data for individual thermostats for specific time periods.



Geofencing



BlueLink QuickCopy® Feature

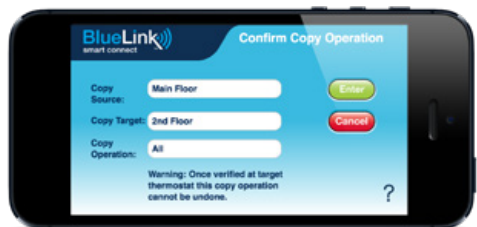

Service and Temperature Alerts



Product Specifications

Dimensions:	3.94" x 5.56" x 1.19"
Electric Rating:	24 Volt AC (18-30 Volt AC) 1 amp maximum load per terminal 3 amp total maximum load (all terminals)
AC Power:	18-30 Volt AC (required for Wi-Fi)
DC Power:	3.0 Volts DC (2 "AA" Alkaline batteries included)
Compatibility:	1 Heat/1 Cool Conventional or Heat Pump Systems
Wi-Fi Communication:	802.11 (requires 24 VAC with C wire)
Control Range:	45° to 90° F (7° to 32° C)
Display Range:	40° to 99° F (5° to 37° C)
Accuracy:	+/- 1° F (+/- .5° C)
Terminations:	G, Rh, Rc, K, W1, O/B/V3, Y1, C, S1, S2

Shipping Information

INDIVIDUAL CARTON

Dimensions: 5.0" x 6.0" x 2.5"
Weight: 1.2 lbs.

MASTER CARTON

Quantity: 3
Dimensions: 7.25" x 6.25" x 5.4"
Cubic Feet: .14
Weight: 3.85 lbs.

Braeburn 7300 Replaces*

Honeywell® TH6320WF
Emerson® 1F86U-42WF

Pro1® T701i
Nest® T100577, T200577, T3007ES

*Verify specific application requirements. All trademarks are the property of their respective owners.

Accessories

7340 Share-a-Wire® Module
2920 Vertical J-Box Adapter Wall Plate
(6.5" x 5.1")
2950 Universal Wall Plate
(6.5" x 6.5")

5390 Wired Remote Indoor Sensor
5490 Wired Remote Outdoor Sensor
5970 Universal Thermostat Guard

FREE Contractor Branding Available!

Visit our website (www.braeburnonline.com) for more information, contact your local distributor or call our sales department toll-free at 866.268.5599 (U.S.), +1.630.844.1968 (Outside the U.S.).



Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.