

THREADED • INTERMEDIATE ATMOSPHERIC VENT • DUAL CHECK VALVE

Backflow Preventer is suitable for use on hot or cold water and can be used under continuous pressure. It features a primary check valve


Features

- True line-sized construction allows the check modules to open further allowing dirt and debris to pass more freely reducing check fouling
- Stainless steel internal parts
- Maximum flow at low pressure drop
- Furnished with union connections to facilitate removal and replacement for maintenance
- Can be installed vertically or horizontally



Specifications & Approvals

Temperature range: 33°F - 250°F
 Working pressure: 25 psi - 175 psi
 Min required pressure 25 psi
 Conforms to ASSE 1012 & CSA B64

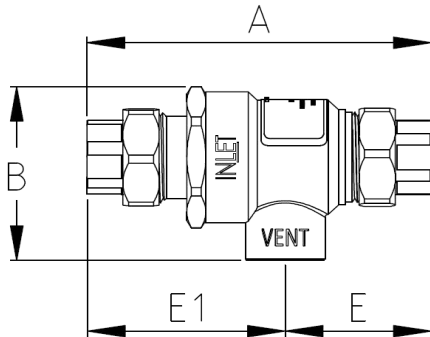

Dimensions



Part#	Size	A	B	E	E1	Wt.(lbs.)
190T012	1/2"	4-5/16"	2-15/16"	2-1/2"	1-13/16"	1.146

Material Specifications

Materials
Forged brass body construction
Stainless steel internal parts
Durable, Tight seating rubber check valve assemblies

Capacity

