

THREADED CONNECTION


Features

- Fits Schedule 40 & 80 Pipe
- With EPDM o-rings and TPE seats
- Compatible with PVC Piping
- For use with non-potable water
- For use with cold-water applications

Specifications & Approvals

150 PSI at 73°F

ISO 9002

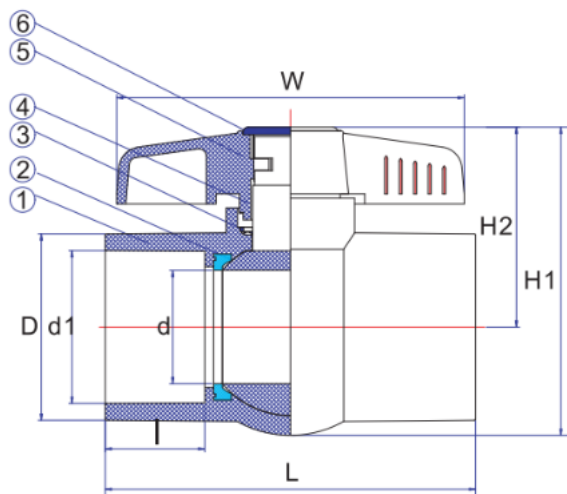

Dimensions

Part#	Size	d1	d	D	L	I	w	H1	H2
260T012	1/2"	21.34	14.5	31.4	76.9	21.3	67.2	63	44.9
260T034	3/4"	26.67	20	36.8	90.5	25	79.4	73.8	52
260T100	1"	33.40	24	44.7	101.9	25.9	93.5	90.3	64
260T114	1-1/4"	42.16	30	51.9	108.3	27.4	106.8	101	70
260T112	1-1/2"	48.26	34	60.1	122.3	29.2	107.7	107.7	72.4
260T200	2"	60.33	44	73.9	145.7	36.7	135.3	123.7	81
260T212	2-1/2"	73	56	92.5	177.5	39.5	192.5	166	108.5
260T300	3"	88.9	71	107	209	48	192.5	181	116
260T400	4"	114.3	86	134.5	294	78	262	236	151.5

Materials

Part Name	Material
1. Body	PVC
2. Seat Seal	TPE
3. O-Ring	EPDM
4. Ball	PVC
5. Handle	ABS
6. Cap	ABS

Engineer's Approval

Job Name / # _____

Contractor _____ Date _____

Job Location _____

Engineer _____ Date _____