


THREADED CONNECTION

Features

- Fits Schedule 40 & 80 Pipe
- Compatible with PVC Piping
- For use with cold-water applications
- With EPDM o-rings and TPE seats

Specifications & Approvals

Pressure rating 150 PSI at 73°F
 Max / Min temperature 140°F / 41°F
 NSF Listed to NSF/ANSI 14, 61 & 372
 ISO 9002, ANSI B1.20.1, ASTM F1970

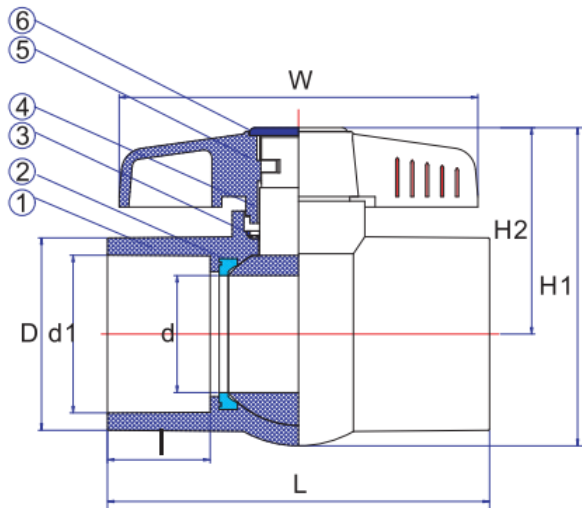

Dimensions

Part#	Size	d1	d	D	L	I	w	H1	H2
265T012	1/2"	21.34	14.5	31.4	76.9	21.3	67.2	63	44.9
265T034	3/4"	26.67	20	36.8	90.5	25	79.4	73.8	52
265T100	1"	33.40	24	44.7	101.9	25.9	93.5	90.3	64
265T114	1-1/4"	42.16	30	51.9	108.3	27.4	106.8	101	70
265T112	1-1/2"	48.26	34	60.1	122.3	29.2	107.7	107.7	72.4
265T200	2"	60.33	44	73.9	145.7	36.7	135.3	123.7	81
265T212	2-1/2"	73	56	92.5	177.5	39.5	192.5	166	108.5
265T300	3"	88.9	71	107	209	48	192.5	181	116
265T400	4"	114.3	86	134.5	294	78	262	236	151.5

Materials

Part Name	Material
1. Body	PVC
2. Seat Seal	TPE
3. O-Ring	EPDM
4. Ball	PVC
5. Handle	ABS
6. Cap	ABS

Engineer's Approval

Job Name / # _____

Contractor _____ Date _____

Job Location _____

Engineer _____ Date _____