


THREADED CONNECTION

Features

- Fits Schedule 40 & 80 Pipe
- Compatible with PVC Piping
- For use with cold-water applications
- With EPDM o-rings and TPE seats

Specifications & Approvals

Pressure rating 150 PSI at 73°F
 Max / Min temperature 140°F / 41°F
 Thread end conforms to ANSI B1.20.1
 NSF Listed to NSF/ANSI 14, 61 & 372
 ISO 9002, ASTM F1970

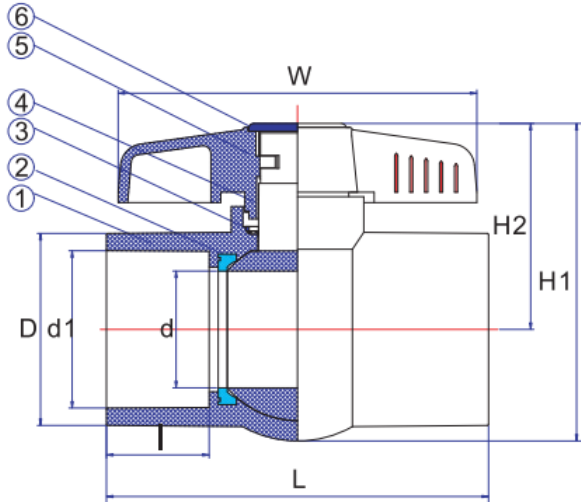

Dimensions

Part#	Size	d1	d	D	L	I	w	H1	H2
270T012	1/2"	21.34	14.5	32	80	22	68.5	64.3	44.9
270T034	3/4"	26.67	20	36.8	92	25	80.5	76	52
270T100	1"	33.40	24	45	106	28	100	94	64
270T114	1-1/4"	42.16	30	53.5	112.5	28	108	103	70
270T112	1-1/2"	48.26	34	62	129	33	108	112	72.4
270T200	2"	60.33	44	75.5	148	39.5	138	126	81
270T212	2-1/2"	73	56	92.5	177.5	39.5	192.5	166	108.5
270T300	3"	88.9	71	107	209	48	192.5	181	116
270T400	4"	114.3	86	134.5	294	78	262	236	151.5

Materials

Part Name	Material
1. Body	PVC
2. Seat Seal	TPE
3. O-Ring	EPDM
4. Ball	PVC
5. Handle	ABS
6. Cap	ABS

Engineer's Approval

Job Name / # _____

Contractor _____ Date _____

Job Location _____

Engineer _____ Date _____