


PUSH X FIP • FULL PORT • LEAD FREE

Features

- Push Fit Connection for Quick and Safe Installation
- Made With Lead Free DZR Brass
- Full Port Ball Valve Design
- Single Lever Zinc Plated Steel Handle
- Connects to PEX, CPVC or Copper Pipe
- Allows for Convenient and Easy, Removable and Re-usable Installation

Specifications & Approvals

Max Pressure: 200 psi WOG
 Max Temperature: 200°F
 Certified by UPC/IAMPO to be lead free compliant
 Meets ANSI/NSF-61-G, AWWA c800
 Conforms to ASME B1.20.1 ASSE 1061
 Manufactured in an ISO 9001 accredited facility

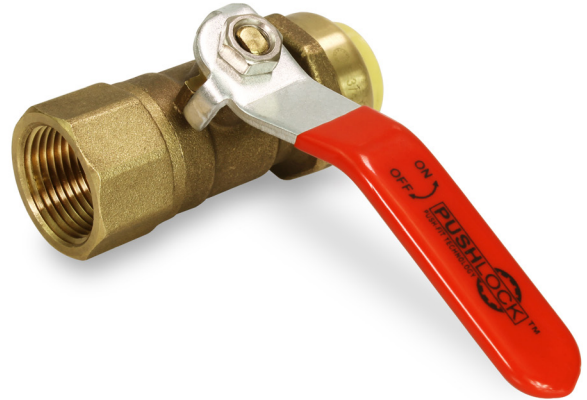

Dimensions

Part #	Size	A	B	C
UPBVF12	1/2"	27.1	16.1	12
UPBVF34	3/4"	33.8	22.4	13
UPBVF1	1"	42.3	28.9	15.5

Material Specifications

Material #
1. C46500
2. PTFE
3. PTFE
4. HPb59-1
5. C46500
6. Nickel Plated Steel
7. C46500
8. C46500
9. EPDM
10. POM
11. 316L
12. POM
13. POM
14. 35#
15. POM

