
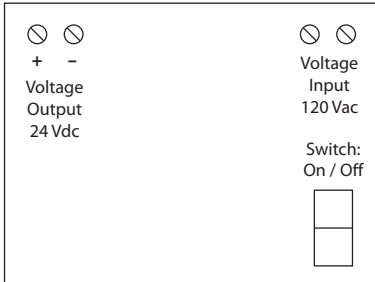


**DC POWER SUPPLY: 120 VAC TO 24 VDC**

**PSMN40A24DS**

DC Power Supply, Isolated Linear, 120 Vac to 24 Vdc, 1 Amp Output, 2.75" Track Mount

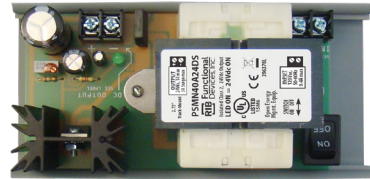

**SPECIFICATIONS**

<b>Voltage Input:</b> 120 Vac	<b>Output Current Ratings:</b> 1 A @ 24 Vdc	<b>Percent Ripple:</b> 0.0016%, 24 Vdc @ 1 A
<b>Voltage Output:</b> 24 Vdc Isolated		
<b>Frequency:</b> 50/60 Hz	<b>Input Current Rating:</b> 400 mA Maximum	<b>Regulation:</b> Load: 0.50% No Load to Full Load Line: 25.0000 mV/V
<b>Overload Protection:</b> Electrical and Thermal, Auto-Reset		
<b>Operating Temperature:</b> -30 to 140° F		
<b>Humidity Range:</b> 5 to 95% (noncondensing)		
<b>Power Status:</b> LED On = Activated		
<b>Dimensions:</b> 5.00"H x 2.75"W x 2.00"D1/2.50"D2		
<b>Housing Detail:</b> See <b>Housing H</b> in housing guide for dimensions		
<b>Origin:</b> Made of US and non-US parts		
<b>Track Mount:</b> 2.750"		
<b>ON/OFF Switch:</b> 2 Position		
<b>Max. Ambient Temperature:</b> 40° C		
<b>Approvals:</b> Class 2, UL916, C-UL, CE, RoHS,		