



AC POWER SUPPLY

PSH75A75A Series

Enclosed Dual 75 VA Power Supplies, 480/277/240/208/120 to 24 Vac



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

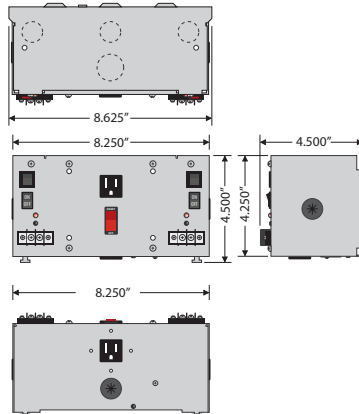

PSH75A75A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH75A75A	.	.	.	External Terminal Strip
PSH75A75AW	.	.	.	Internal Wires
PSH75A75AB10*	.	.	10 Amp Switch / Breaker	External Terminal Strip
PSH75A75AWB10*	.	.	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: Two 75 VA Split-Bobbin
Over Current Protection: Circuit Breaker
Frequency: 50/60 Hz
24 Vac ON/OFF: On / Off Switch & Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
 Total Combined Output 9A
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS, Special
 ^ Seismic Certification of Equipment
and Components: OSP-0201-10
Dimensions: 4.500" x 8.625" x 4.500"

Input Wires: "B10" Models Only
Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground
Outlet Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground

Output Wires: "B10" Models Only
Auxiliary Output
 BLU: 120 Vac

All Other Models
Primary Wires**
 GRY: 480 Vac
 BRN: 277 Vac
 ORG: 240 Vac
 RED: 208 Vac
 WHT: 120 Vac
 BLK: Common

"W" Models Only
Transformer Output
 WHT/YEL: 24 Vac
 WHT/BLU: Common

Notes:

- All dual models: Model number denotes location of transformer within enclosure.
PSH75A75A
 Left side Right side
- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- Design is in accordance with ASCE 7-05 Chapter 13: ^
www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf
- All primary voltages other than 120 Vac will result in the disabling of convenience outlets.**