

Valve Accessory


Lift-N-Lock Handle



Lift-N-Lock Handle


This Jomar locking device prevents unauthorized use during maintenance or down-time. The locking device is attached over the stem and handle and held in place with an allen screw that is threaded into the center of the stem. With the padlock in place, the allen screw is not accessible, making it a tamper proof design.

Will fit any T-100, S-100 or JP-100 series ball valve.

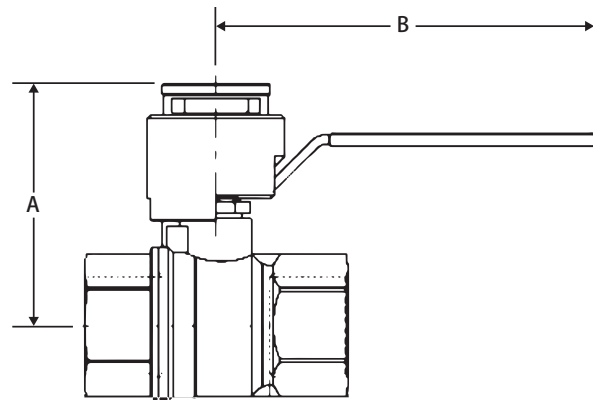

Dimensions

| Part No. | Size | A | B |
|-------------------|------------------|------|------|
| 210-994, 210-994C | 1/4", 3/8", 1/2" | 1.97 | 2.95 |
| 210-995, 210-995C | 3/4" | 2.24 | 3.74 |
| 210-996, 210-996C | 1", 1-1/4" | 2.89 | 4.72 |
| 210-997, 210-997C | 1-1/2", 2" | 3.90 | 5.91 |
| 210-998, 210-998C | 2-1/2", 3" | 5.12 | 7.87 |
| 210-999C | 4" | | |

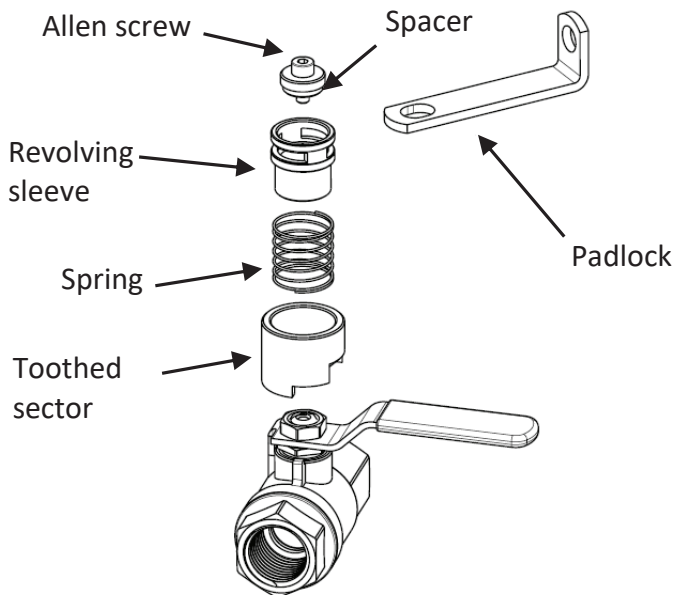

Materials

| Part | Material |
|------------------|-----------------------------------|
| Tooth Sector | CW617N |
| Revolving Sleeve | CW614N |
| Spring | Stainless Steel |
| Allen Screw | Steel |
| Padlock | Steel with Delta Protek Treatment |
| Spacer | CW614N |
| Collar | Rubber |

| Locks Both Open & Closed | | | Locks Only in Closed Position | | |
|--------------------------|------------------|------|-------------------------------|------------------|------|
| Part No. | Size | Type | Part No. | Size | Type |
| 210-994 | 1/4", 3/8", 1/2" | 1 | 210-994C | 1/4", 3/8", 1/2" | 1 |
| 210-995 | 3/4" | 2 | 210-995C | 3/4" | 2 |
| 210-996 | 1", 1-1/4" | 3 | 210-996C | 1", 1-1/4" | 3 |
| 210-997 | 1-1/2", 2" | 4 | 210-997C | 1-1/2", 2" | 4 |
| 210-998 | 2-1/2", 3" | 5 | 210-998C | 2-1/2", 3" | 5 |
| | | | 210-999C | 4" | 6 |

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.