

# VA/VF/VS-7000/9000 Series


## Linked Globe Valve Assemblies with Linear SmartX Actuators

### Globe Valve Assemblies

The Schneider Electric VA, VF, and VS-7000 and -9000 series Linked Globe Valve Assemblies with Schneider Electric SmartX Linear Series Actuators are complete actuator/valve assemblies that accept two position, floating, or proportional control, respectively, from a DDC system or from a thermostat, for control of hot water, chilled water, and steam.


These valve assemblies consist of Linear Series spring return Schneider Electric SmartX Actuators directly mounted on 1/2" up to 4" (15 mm to 80 mm) 2-way and 3-way globe valve bodies. 3-way assemblies are available for mixing (1/2" to 4") and diverting (1/2" to 2") applications. The Linear Series Schneider Electric SmartX Actuators feature linear travel and an integral linkage, eliminating the need for separate linkages.

Typical applications include reheat on VAV boxes, fan coil units, hot and chilled water coils in air handling units, unit ventilators, and central system applications.

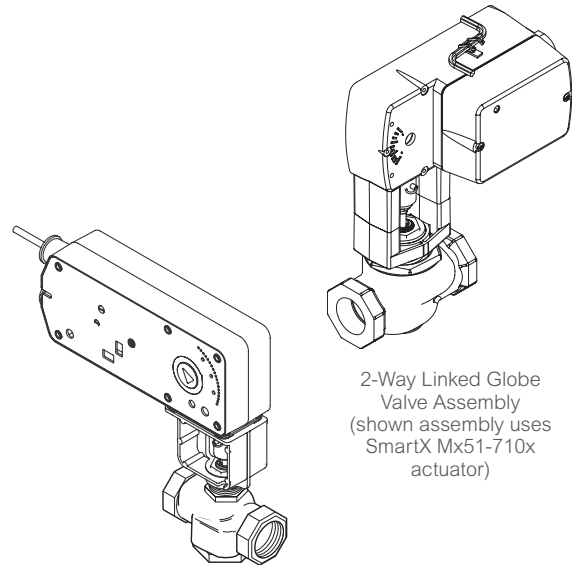

2-Way Linked Globe Valve Assembly (shown assembly uses SmartX Mx51-710x actuator)

3-Way Linked Globe Valve Assembly (shown assembly uses SmartX Mx51-720x actuator)

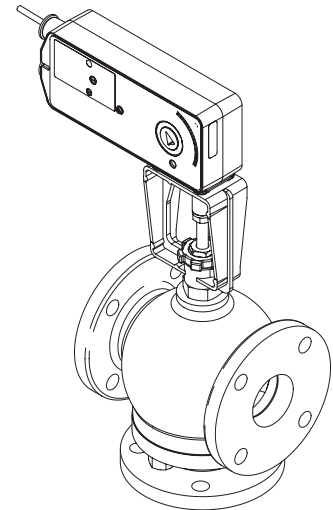

3-Way Linked Flanged Globe Valve Assembly (shown assembly uses SmartX Mx61-720x actuator)

Applicable Literature

F-Number	Description	Audience	Purpose
F-27169	MA51-710x, MF51-7103, and MS51-7103 105 lbf (467 N) Linear Series SmartX Actuators General Instructions	<ul style="list-style-type: none"> <li>- Sales Personnel</li> <li>- Application Engineers</li> <li>- Installers</li> <li>- Service Personnel</li> <li>- Start-up Technicians</li> </ul>	<p>Describes the actuator's features, specifications, and possible applications. Provides step-by-step mounting instructions.</p>
F-27120	MAx1-720x, MFx1-7203, and MSx1-7203 220 lbf (979 N) Linear Series SmartX Actuators General Instructions		
F-27171	MA51-710x, MF51-7103, MS51-7103 Linear Series SmartX Actuators Installation Instructions		<p>Describes the actuator's features and possible applications. Provides step-by-step mounting instructions.</p>
F-27165	Mx51-710x, Mx51-720x, and Mx61-720x SmartX Linear Series Spring Return Actuator Submittal Sheet	<ul style="list-style-type: none"> <li>- Sales Personnel</li> <li>- Application Engineers</li> </ul>	<p>Describes features and specifications of the Linear Series SmartX Actuators.</p>
F-27167	Vx-7xxx-xxx-x-P and Vx-9xxx-xxx-x-P Two-Way and Three-Way Globe Valve Assemblies with SmartX Linear Series Spring Return Actuators Submittal Sheet		<p>Describes features and specifications of the Globe Valve Assemblies using the Linear Series SmartX Actuators.</p>
F-26080	EN-205 Water System Guidelines	<ul style="list-style-type: none"> <li>- Application Engineers</li> <li>- Installers</li> <li>- Service Personnel</li> <li>- Start-up Technicians</li> </ul>	<p>Describes approved water treatment practices.</p>
F-24380	VB-7211 Series 1/2" to 1 1/4" Union Straightway NPT Stem Up Open, 2-Way Valves General Instructions	<ul style="list-style-type: none"> <li>- Sales Personnel</li> <li>- Application Engineers</li> <li>- Installers</li> <li>- Service Personnel</li> <li>- Start-up Technicians</li> </ul>	<p>Describes the valve's features, specifications, and possible applications. Provides step-by-step mounting, installation, and checkout instructions.</p>
F-26075	VB-7213 Series 1/2" to 2" Screwed NPT Stem Up Open, 2-Way Valves General Instructions		
F-26077	VB-7215 Series 15 mm to 50 mm Screwed Rp Stem Up Open, 2-Way Valves General Instructions		
F-24384	VB-7221 Series 1/2" to 1 1/4" Union Straightway NPT Stem Up Closed, 2-Way Valves General Instructions		
F-26073	VB-7223 Series 1/2" to 2" Screwed NPT Stem Up Closed, 2-Way Valves General Instructions		
F-26079	VB-7225 Series 15 mm to 50 mm Screwed Rp Stem Up Closed, 2-Way Valves General Instructions		
F-26074	VB-7313 Series 1/2" to 2" Screwed NPT 3-Way Mixing Valves General Instructions		
F-26078	VB-7315 Series 15 mm to 50 mm Screwed Rp 3-Way Mixing Valves General Instructions		
F-26076	VB-7323 Series 1/2" to 2" Screwed NPT 3-Way Diverting Valves General Instructions		
F-24382	VB-9213 Series 2 1/2" to 6" Screwed or Flanged Stem Up Open, 2-Way Valves General Instructions		
F-25672	VB-9215 Series 65 mm and 80 mm Screwed Stem Up Open, 2-Way Valves General Instructions		
F-24386	VB-9223 2 1/2" to 6" Screwed or Flanged Stem Up Closed, 2-Way Valves General Instructions		
F-25673	VB-9225 Series 65 mm and 80 mm Screwed Stem Up Closed, 2-Way Valves General Instructions		
F-24393	VB-9313 Series 2 1/2" to 6" Screwed or Flanged 3-Way Mixing Valves General Instructions		
F-25674	VB-9315 Series 65 mm and 80 mm Screwed 3-Way Mixing Valves General Instructions		

Features	Benefits
24 Vac, 120 Vac, and 230 Vac models.	Satisfies a wide range of power requirements.
Compact size.	Allows installation in limited spaces.
Spring return.	Valve returns to known position upon loss of power.
Manual override.	Allows valve positioning and preload adjustment, simplifying installation, start-up, and troubleshooting.
Rugged polymer or die-cast housings rated for up to NEMA 2, UL Type 2 (IP54).	Water-resistant rating supports use in most common indoor HVAC environments.
Valve sizes 1/2" to 4" and 15 mm to 80 mm (Union Straightway, NPT, Flanged, Metric) 2-Way and 3-Way.	Satisfies a wide range of application requirements.
Up to 250 psig (1724 kPa) close-off.	Meets variety of close-off requirements.
Built-in position feedback on MFx1-710x floating and all proportional models.	Offers maximum flexibility in selecting precise control for a wide variety of applications, significantly reducing installation time.
High fluid and ambient temperature ratings.	Allows use in harsh environments.
Proportional models feature control function switch or jumper.	Allows the selection of direct or reverse action for application flexibility.
Thermal isolation.	Protects the actuator from cold or excess heat generated by chilled water, hot water, or steam passing through the valve. Discourages condensation.
Spring-loaded PTFE valve packing.	Self adjusting. No tightening required.
250 psig valve body static pressure rating per ANSI Standards (B16.15—1985) for screwed cast bronze bodies. 125 psig valve body static pressure rating for cast iron flanged bodies.	Meets most demanding pressure requirements.
Overload protection on all models.	Eliminates application of excessive force on stem and overheating of actuator.
Highly visible position indicator.	Shows the valve position, facilitating setup, checkout, and troubleshooting.
24 Vac models require less than 10 VA.	Saves cost while meeting job specifications, by using fewer transformers and less energy.

## Globe Valve Assembly Selection Procedure

When selecting a globe valve assembly, you must determine the applicable codes for the control signal type, valve body configuration, end connection, port size, and actuator. Select a globe valve assembly part number as follows:

### 1. Control Signal Type, Valve Body Configuration, and End Connection

Referring to “Part Numbering System” on page 4, select the appropriate codes for these part number fields.

### 2. Valve Size (Flow Coefficient)

If the required flow coefficient ( $C_v$ ) has not yet been determined, do so as follows:

- a. Refer to the “Sizing and Selection” section on pages 8 to 11, to calculate the required  $C_v$ .
- b. Select the nearest available  $C_v$  and corresponding valve body port code from “Part Numbering System” on page 4.

### 3. Actuator

Select the appropriate actuator and code, according to “Part Numbering System” on page 4, based on the control signal type, required valve normal position, and voltage requirements. For detailed actuator information, refer to the applicable actuator specifications on page 16, 19, or 21.

Note: Globe Valve Assemblies are not available with Mx51-7103-0x0 actuators (equipped with appliance wire). However, if required, you may field-assemble one of these actuators to a globe valve body. For information on Mx51-7103-0x0 actuators, refer to page 16.

### 4. Close-off Pressure


Confirm in Table-3 or Table-4 that the selected actuator and valve body combination provides sufficient close-off pressure. If no close-off pressure is shown, the valve body/actuator combination is not valid.

### 5. Available Space

If available space is a consideration, check the appropriate dimensional figure (Figure 8 through Figure 19) and its accompanying table for any potential fit problems.

# Linked Globe Valve Assembly Part Numbering System

## Linked Globe Valve Assemblies

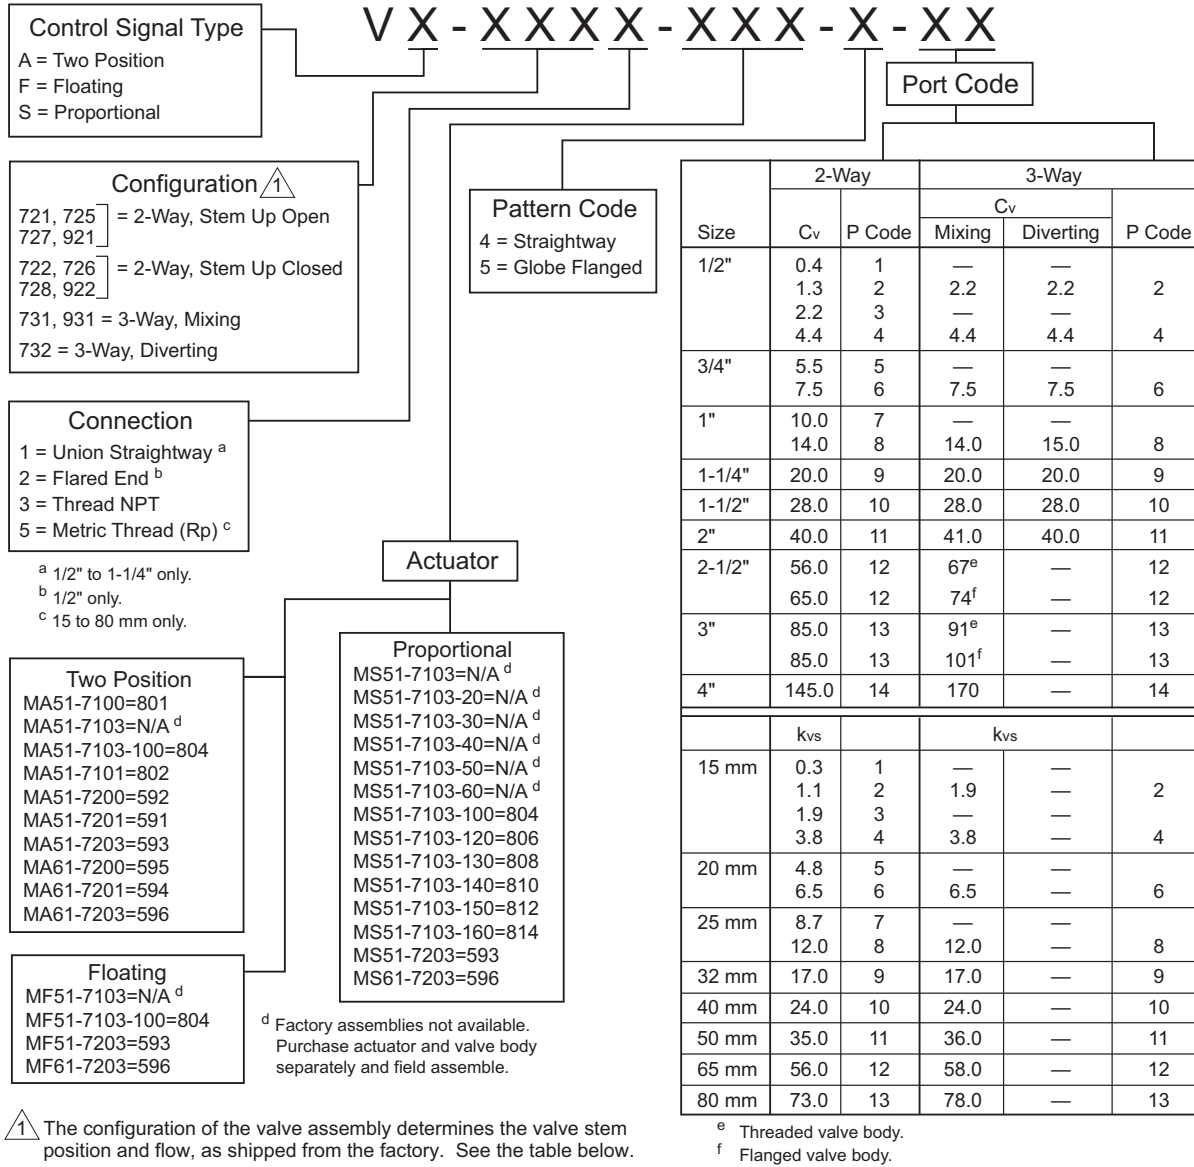

<sup>1</sup> The configuration of the valve assembly determines the valve stem position and flow, as shipped from the factory. See the table below.

Valve Assemblies	Valve Body Action	Factory Shipped Position		Action
		Valve Stem	Flow	
VX-721X-XXX-4-P VX-725X-XXX-4-P VX-727X-XXX-4-P VX-921X-XXX-X-P	2-Way Stem Up Open	Up	Open	A to AB Flow decreases as actuator extends
VX-722X-XXX-4-P VX-726X-XXX-4-P VX-728X-XXX-4-P VX-922X-XXX-X-P	2-Way Stem Up Closed	Up	Closed	A to AB Flow increases as actuator extends
VX-731X-XXX-4-P VX-931X-XXX-X-P	3-Way Mixing	Up	B to AB	A to AB Flow increases as actuator extends B to AB Flow decreases as actuator extends
VX-732X-XXX-4-P	3-Way Diverting	Up	B to AB	B to A Flow increases as actuator extends B to AB Flow decreases as actuator extends

## Linked Globe Valve Assembly

The information in this section describes characteristics of the VB-7xxx and VB-9xxx valve bodies, which are used in the Vx-7xxx and Vx-9xxx valve assemblies.

### Control Precision

**2-Way Valves:** All valves have modified equal percentage flow characteristics. That is, for equal increments of valve stem stroke, the change in flow rate with respect to valve stroke may be expressed as a constant percent of the flow rate at the time of the change. The change of flow rate with respect to valve stroke is relatively small when the valve plug is near the valve seat and relatively high when the valve plug is nearly wide open. See Figure 1 for typical modified equal percentage flow characteristics of VB-72xx and VB-92xx series valves.

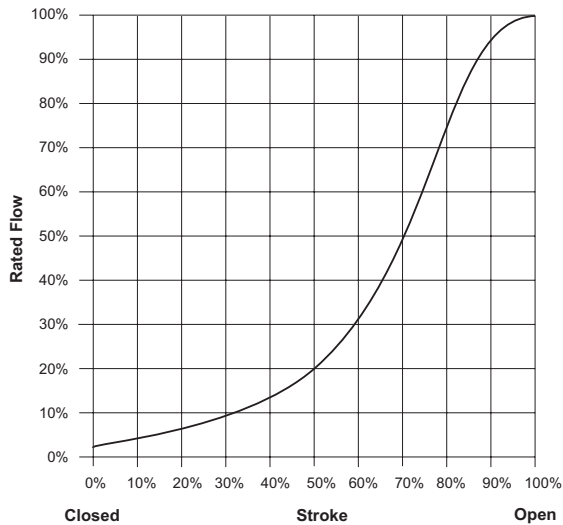


Figure 1 Typical Modified Equal Percentage Flow Characteristics.

**3-Way Valves:** 3-way mixing valves are designed so that the flow from either of the inlet ports to the outlet is approximately linear, which means the total flow from the outlet is almost constant over the stroke of the valve stem. See Figure 2 for typical flow characteristics of the VB-731x and VB-931x series valve bodies.

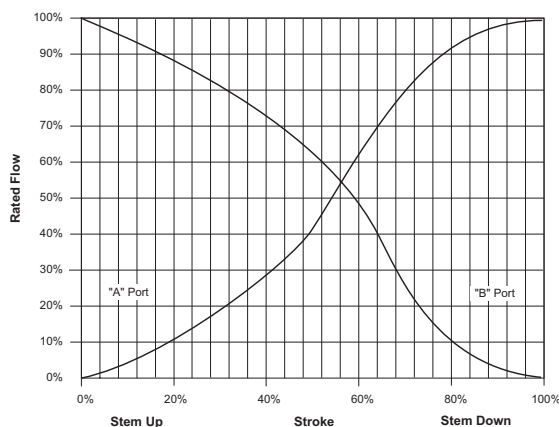


Figure 2 Typical Flow Characteristics.

### Rangeability

Rangeability is the ratio of rated flow to the minimum controllable flow through a valve. **2-Way Valves:** Table-1 lists the rangeability for VB-72xx and VB-92xx series globe valves. Refer to the model charts on the following pages for detailed valve information.

### Rangeability.

Nominal Valve Size		Port Code (P)	Nominal Rangeability
Standard	Metric		
1/2"	15 mm	1	5:1
		2	15:1
		3	25:1
		4	40:1
3/4"	20 mm	5	50:1
		6	60:1
1"	25 mm	7	60:1
		8	75:1
1 1/4"	32 mm	9	75:1
1 1/2"	40 mm	10	75:1
2"	50 mm	11	75:1
2 1/2"	65 mm	12	75:1
3"	80 mm	13	75:1
4"	—	14	75:1

**3-Way Valves:** For mixing valves, control begins as soon as plug displacement allows flow. Thus, the rangeability of 3-way valves normally exceeds 500:1, which is the reciprocal of 0.2% nominal leakage.

### Temperature/Pressure Ratings

See Figure 3 for temperature and pressure ratings of 2-way and 3-way valves. Ratings conform with published values and disclaimer.

#### VB-7xxx-0-x-P and VB-9xxx-0-4-P (Cast Bronze Body)

Standards: Pressure to ANSI B16.15, Class 250, with 400 psi (2758 kPa) up to 150 °F (65 °C), decreasing to 346 psi (2386 kPa) at 281°F (138 °C).

Materials: Valve body is made of bronze, ASTM B584. Valve trim is 316 stainless steel stem with brass, stainless steel, or bronze plug, metal-to-metal or EPDM disc with PTFE packing parts. See Table-5 or Table-6 for further details.

#### VB-9xxx-0-5-P (Cast Iron Body with Flanged End Fittings)

Standards: Pressure to ANSI B16.1, Class 125, with 200 psi (1379 kPa) up to 150 °F (65 °C), decreasing to 169 psi (1165 kPa) at 281°F (138 °C).

Materials: Valve body is made of cast iron, ASTM A126 Class B. Valve trim is 316 stainless steel stem, brass or bronze plug, metal-to-metal or EPDM disc with PTFE packing parts. See Table-5 or Table-6 for further details.

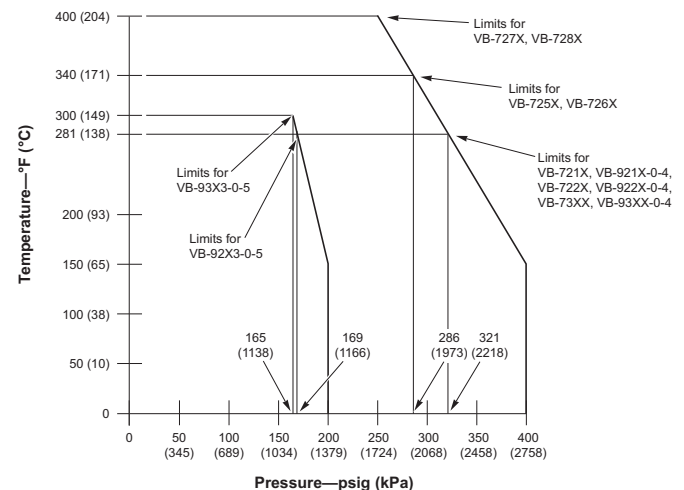


Figure 3 Temperature and Pressure Ratings for VB-7xxx and VB-9xxx Series Globe Valves.

## Close-off Ratings

Nominal actuator close-off ratings are based on ANSI IV (0.01% leakage) with EPDM discs and PTFE discs in steam applications. Metal-to-metal trim such as brass 3-way and high temperature stainless are designed for ANSI III (0.1% leakage). Seat leakage for reduced port versions of metal-to-metal seats may match the full port versions, allowing up to 1% on the 0.4 C<sub>v</sub> plugs.

## Installation Considerations

### Mounting Angle of Valve Assembly

Be sure to allow the necessary clearance around the valve assembly. The valve assembly must be mounted so that the valve stem is at least 5° above the horizontal. This ensures that any condensate that forms on the valve body will not travel into the linkage or actuator, where it may cause corrosion. On steam applications, where the ambient temperature approaches the limit of the actuator, the valve assembly must be mounted 45° from vertical. See the applicable Actuator General Instructions for details.

### Insulation of Linked Globe Valve Assembly

The globe valve should be completely insulated to minimize the effect of heat transfer and condensation at the actuator.

Caution: The actuator and the integral linkage must not be insulated. Doing so will result in excess heat or condensation within the actuator.

### Temperature Limits for Globe Valve Assembly

When installing the globe valve assembly, observe the minimum and maximum temperature limits given in the Actuator Specifications and Valve Assembly Mounting Dimensions section of this document.

## Sizing and Selection

### Flow Coefficient (C<sub>v</sub>)

When sizing a valve, you must select a flow coefficient (C<sub>v</sub>), which is defined as the flow rate in gallons per minute (GPM) of 60 °F water that will pass through the fully open valve with a 1 psi pressure drop (ΔP). It is calculated according to this formula:

$$C_v = \frac{\text{gpm}}{\sqrt{\Delta P}}$$

where ΔP is measured in psi.

Since the flow rate through the heat exchanger is usually specified, the only variable normally available in sizing a valve is the pressure drop. The following information in this section can be used to determine what pressure drop to use in calculating a valve C<sub>v</sub>. Once you have calculated the C<sub>v</sub>, consult "Part Numbering System" on page 4 to select the valve body having the nearest available C<sub>v</sub>.

Note: Metric equivalent.

The metric measure of flow coefficient is kvs, which is calculated according to the formula:  $kvs = \frac{m^3/h}{\sqrt{\Delta P}}$

(where DP is measured in bar; 1 bar = 100 kPa.).

If the C<sub>v</sub> is already known, it may be converted directly to its kvs equivalent:  $kvs = \frac{C_v}{1.156}$

## Two-position Control

Two-position control valves are normally selected "line size" to keep pressure drop at a minimum. If it is desirable to reduce the valve below line size, then 10% of "available pressure" (that is, the pump pressure differential available between supply and return mains with design flow at the valve location) is normally used to select the valve.

## Proportional Control

Proportional control valves are usually selected to take a pressure drop equal to at least 50% of the "available pressure." As "available pressure" is often difficult to calculate, the normal procedure is to select the valve using a pressure drop at least equal to the drop in the coil or other load being controlled (except where small booster pumps are used) with a minimum recommended pressure drop of 5 psi (34 kPa). When the design temperature drop is less than 60°F (33°C) for conventional heating systems, higher pressure drops across the valve are needed for good results (Table-2).

Table 2. Conventional Heating System

Design Temperature Load Drop °F (°C)	Recommended Pressure Drop <sup>a</sup> (% of Available Pressure)	Multiplier on Load Drop
60 (33) or More	50%	1 x Load Drop
40 (22)	66%	2 x Load Drop
20 (11)	75%	3 x Load Drop

a - Recommended minimum pressure drop = 5 psi (34 kPa).

**Secondary Circuits with Small Booster Pumps:** 50% of available pressure difference (equal to the drop through load, or 50% of booster pump head).

### 3-Way Proportional Mixing Valves Used to Bypass Flow

When 3-way proportional linked globe valve assemblies are used to control flow through a heating or cooling coil, the valve assembly is piped on the outlet side of the load to throttle the water flow through the load, and therefore control the heat output of the load (Figure 4).

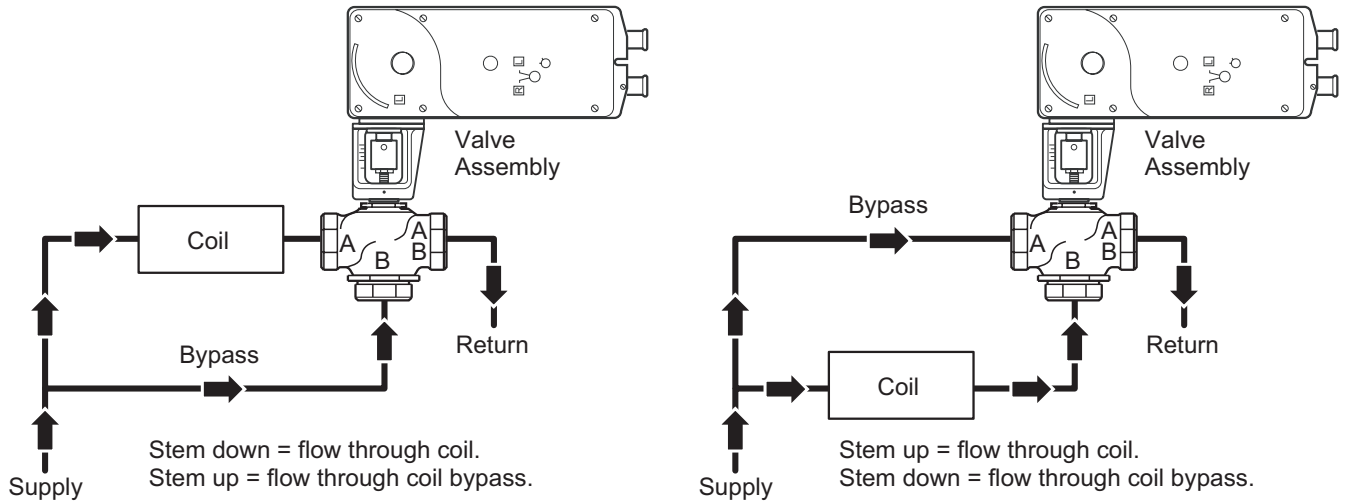


Figure 4 Typical Piping of 3-Way Mixing Valve for Control of Heating or Cooling Coil.

### 3-Way Proportional Mixing Valves used to Blend Water Flows

Proportional 3-way mixing valves used to blend two water flows (Figure 5) control the heat output by varying the water temperature to the load at constant flow. These valves do not require high pressure drops for good control results. They can be sized for a pressure drop of 20% of the "available pressure" or equal to 25% of the pressure drop through the load at full flow.

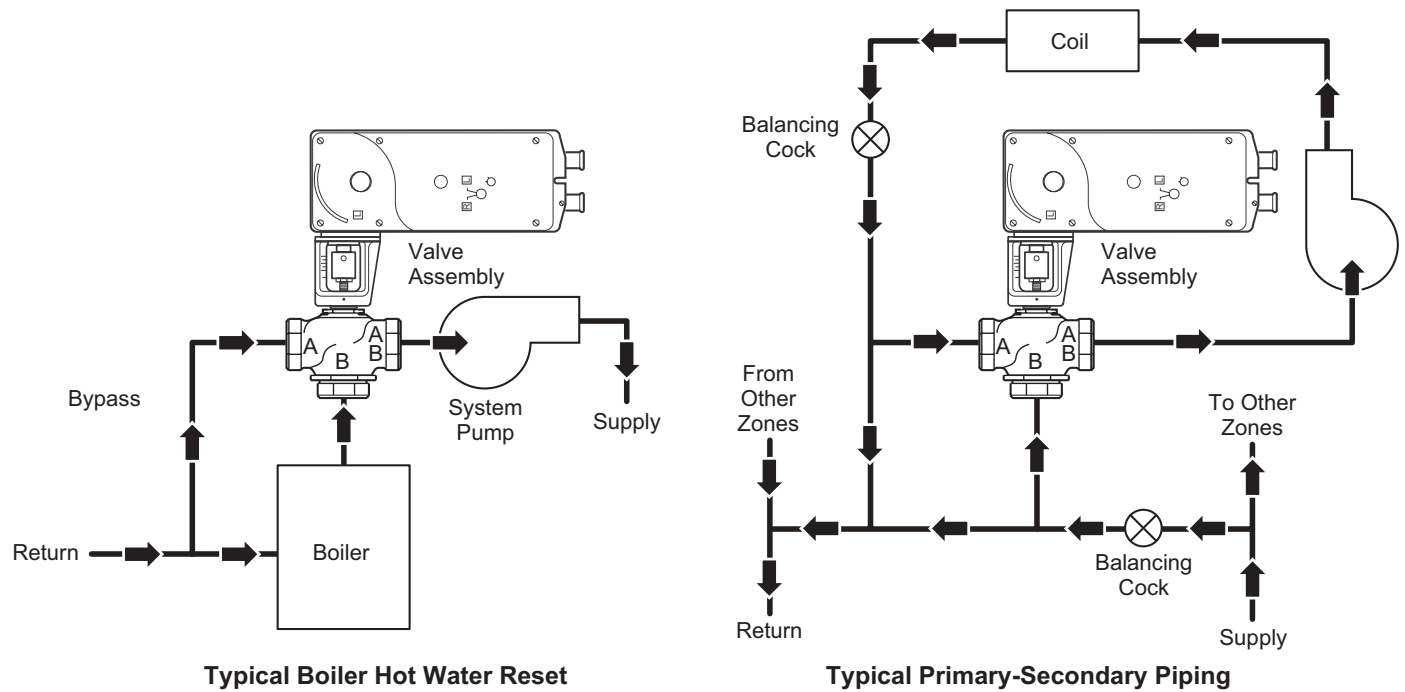


Figure 5 Typical 3-Way Mixing Valve Piping for Proportional Control Used to Blend Two Water Flows.

### 3-Way Diverting Valves

Proportional and two-position 3-way diverting linked globe valve assemblies are used to control the flow of hot or chilled fluids in heating systems, cooling coils, or other load by diverting the flow to either the load or a bypass. The valve must be piped with one inlet and two outlets. (Figure 6).

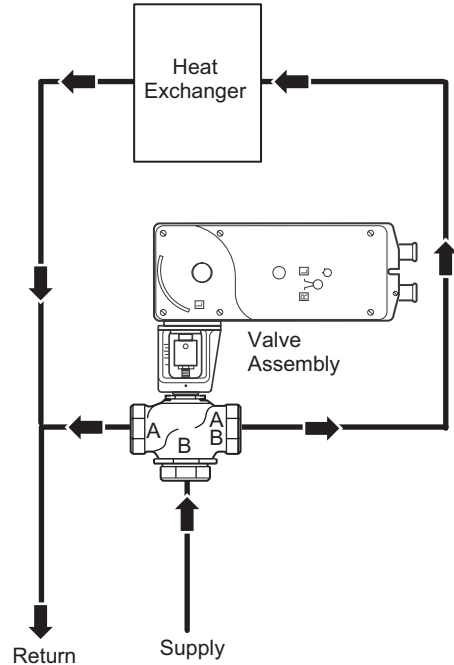


Figure 6 Typical 3-Way Diverting Valve Piping.

### Cavitation Limitations on Valve Pressure Drop

A valve selected with too high a pressure drop can cause erosion of discs and/or wire drawing of the seat. In addition, cavitation can cause noise, damage to the valve trim (and possibly the body), and choke the flow through the valve.

Do not exceed the maximum differential pressure (pressure drop) for the valve selected. Refer to the chart in Figure 7.

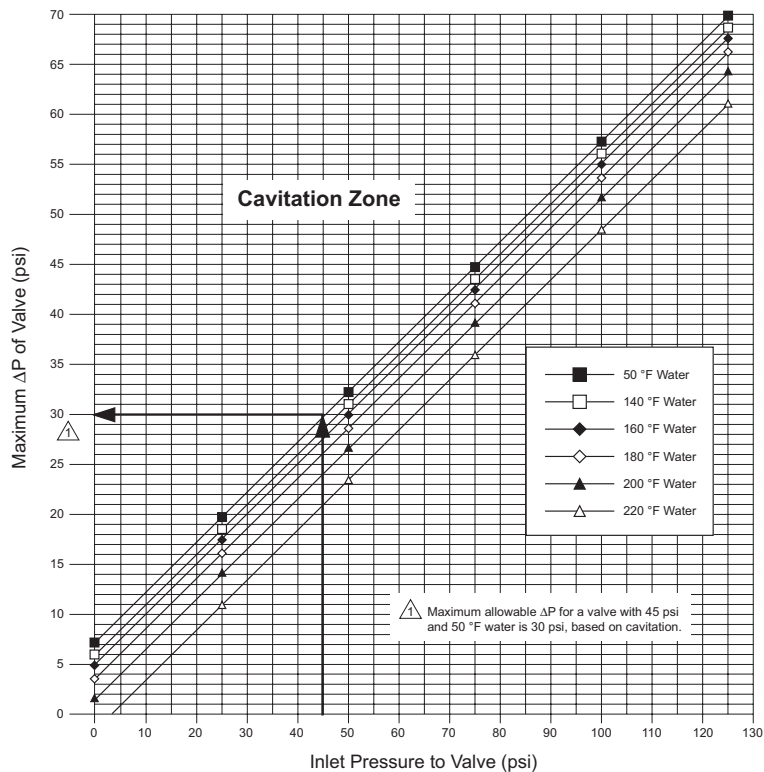


Figure 7 Maximum Allowable Differential Pressure (DP) for Water Valves.







# Valve/Actuator Combinations

## 2-Way Linked Globe Valve Assemblies with Linear Series Actuators

Note: Choose a valve assembly having a close-off pressure capability sufficient for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled.

Table-3 2-Way Linked Globe Valve Assemblies with Linear Series Spring Return Actuators — Selection Chart.

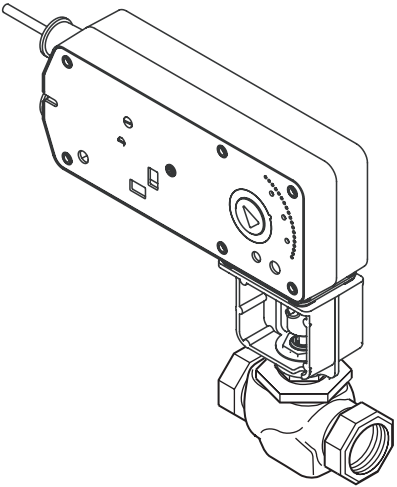 <p style="text-align: center;"><b>2-Way Linked Globe Valve Assemblies</b></p>														
					<b>Actuator Force Rating</b>				105 lbf (467 N)		220 lbf (979 N)			
					<b>Actuator Model (Actuator Code)</b>				Two-Position MA51-7100 (801) MA51-7101 (801) MA51-7103-100 (804) Floating MF51-7103-100 (804) Proportional MS51-7103-100 (804) MS51-7103-120 MS51-7103-130 MS51-7103-140 MS51-7103-150 (812) MS51-7103-160 (814)		Two-Position MA51-720x (591) (592) (593) Floating MF51-7203 (593) Proportional MS51-7203 (593)		Two-Position MA61-720x (594) (595) (596) Floating MF61-7203 (596) Proportional MS61-7203 (596)	
					<b>Valve Assembly Part Number<sup>b</sup></b>					<b>Actuator Close-off Pressure psi<sup>de</sup></b>				
	<b>P Code</b>	<b>Valve Size in. (mm)</b>	<b>C<sub>v</sub><sup>c</sup></b>	<b>k<sub>vs</sub><sup>c</sup></b>	<b>N.O.<sup>f</sup></b>	<b>N.C.<sup>g</sup></b>								
Vx-72x1-xxx-4-P Vx-72x2-xxx-4-P Vx-72x3-xxx-4-P Vx-72x5-xxx-4-P <sup>h</sup>	1	1/2 (15)	0.4	0.3	250	250	—	—	—					
	2		1.3	1.1										
	3		2.2	1.9										
	4		4.4	3.8										
	5	3/4 (20)	5.5	4.8	200	200								
	6		7.5	6.5										
	7		10.0	8.7										
	8	1 (25)	14.0	12	150	90								
	9	1 1/4 (32)	20.0	17	90	60				150				
Vx-72x3-xxx-4-P Vx-72x5-xxx-4-P <sup>h</sup>	10	1 1/2 (40)	28.0	24	60	35	100							
	11	2 (50)	40.0	35	32	20	65							
Vx-92x3-xxx-4-P <sup>i</sup> Vx-92x3-xxx-5-P <sup>i</sup> Vx-92x5-xxx-4-P <sup>h</sup>	12	2 1/2 (65)	56.0 <sup>j</sup>	48 <sup>i</sup>	—	—	—	33						
			65.0 <sup>j</sup>	56 <sup>i</sup>				22						
	13	3 (80)	85.0	73				—	—	—				
Vx-9213-xxx-5-P <sup>i</sup> Vx-9223-xxx-5-P <sup>i</sup>	14	4 (N/A)	145.0	125	—	—	—	12						

b - To determine a specific part number, see "Part Numbering System" on page 4.

$$c - C_v = \frac{GPM}{\sqrt{\Delta P}} \quad \text{Where } \Delta P \text{ is measured in psi} \quad k_{vs} = \frac{C_v}{1.156} \quad k_{vs} = \frac{m^3/h}{\sqrt{\Delta P}} \quad \text{Where } \Delta P \text{ is measured in bar} = 100 \text{ kPa}$$

d - Close-off ANSI IV (.01%) for soft seats. For seat leakage ratings of specific valve bodies, see Table-5 and Table-6.

e - Close-off pressure ratings describe only the differential pressure which the actuator can close-off with adequate seating force. Consult valve body specifications for other limitations. The rating value is the pressure difference between the inlet and outlet ports.

f - Normally open (N.O.) assembly using stem up open valve body. See "Part Numbering System" on page 4.

g - Normally closed (N.C.) assembly using stem up closed valve body. See "Part Numbering System" on page 4.

h - Metric thread 15 to 80 mm (Rp 1/2 to Rp 3).



i - Threaded valve body.

j - Flanged valve body.

### 3-Way Linked Globe Valve Assemblies with Linear Series Actuators

Note: Choose a valve assembly having a close-off pressure capability sufficient for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled.

Table-4 3-Way Linked Globe Valve Assemblies with Linear Series Spring Return Actuators — Selection Chart.

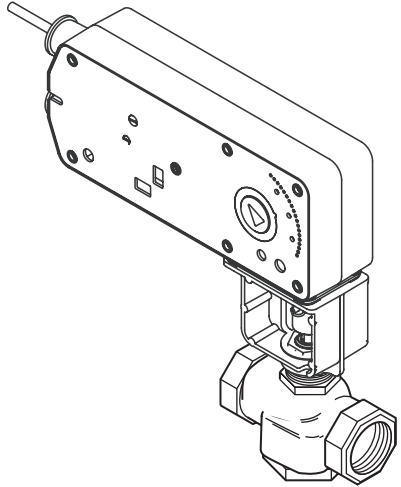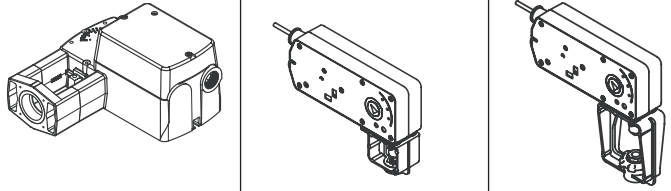 <p><b>3-Way Linked Globe Valve Assemblies</b></p>										
					<b>Actuator Force Rating</b>					
					105 lbf (467 N)			220 lbf (979 N)		
					<b>Actuator Model (Actuator Code)</b>					
					Two-Position MA51-710x (801) (802) MA51-7103-100 (804) Floating MF51-7103-100 (804) Proportional MS51-7103-1x0 (804) (806) (808) (810) (812) (814)	Two-Position MA51-720x (591) (592) (593) Floating MF51-7203 (593) Proportional MS51-7203 (593)	Two-Position MA61-720x (594) (595) (596) Floating MF61-7203 (596) Proportional MS61-7203 (596)			
Valve Assembly Part Number <sup>b</sup>	P Code	Valve Size in. (mm)	Cv <sup>c</sup>	kvs <sup>c</sup>	Actuator Close-off Pressure psi <sup>d,e</sup>					
Mixing Vx-7313-xxx-4-P Vx-7315-xxx-4-P	2	1/2 (15)	2.2	1.9	250	—	—			
	4		4.4	3.8						
	6	3/4 (20)	7.5	6.5	200	—	—			
	8	1 (25)	14.0	12.0	90	—	—			
	9	1¼ (32)	20.0	17	60	150	—			
	10	1½ (40)	28	24	35	100	—			
	11	2 (50)	41	36	20	65	—			
Diverting Vx-7323-xxx-4-P	4	1/2 (15)	4.4	3.8	250	—	—			
	6	3/4 (20)	7.5	6.5						
	8	1 (25)	15.0	13.0						
	9	1¼ (32)	20.0	17.3						
	10	1½ (40)	28	24.2						
	11	2 (50)	40	34.6						
Vx-9313-xxx-4-P <sup>g</sup> Vx-9313-xxx-5-P <sup>h</sup> Vx-9315-xxx-4-P <sup>i</sup>	12	2½ (65)	67.0 <sup>g</sup>	58 <sup>g</sup>	—	—	33			
			74.0 <sup>h</sup>	64 <sup>h</sup>						
	13	3 (80)	91.0 <sup>g</sup>	79 <sup>g</sup>	—	—	22			
			101.0 <sup>h</sup>	87 <sup>h</sup>						
Vx-9313-xxx-5-P <sup>h</sup>	14	4 (N/A)	145.0	125	—	—	12			

b - To determine a specific part number, see "Part Numbering System" on page 4.

c -  $Cv = \frac{GPM}{\sqrt{\Delta P}}$  Where  $\Delta P$  is measured in psi       $kvs = \frac{Cv}{1.156}$        $kvs = \frac{m^3/h}{\sqrt{\Delta P}}$  Where  $\Delta P$  is measured in bar = 100 kPa

d - Close-off ANSI IV (.01%) for soft seats. For seat leakage ratings of specific valve bodies, see Table-5 and Table-6.

e - Close-off pressure ratings describe only the differential pressure which the actuator can close-off with adequate seating force. Consult valve body specifications for other limitations. The rating value is the pressure difference between the inlet and outlet ports.

f - Normally open (N.O.) assembly using stem up open valve body. See "Part Numbering System" on page 4.

g - Normally closed (N.C.) assembly using stem up closed valve body. See "Part Numbering System" on page 4.



h - Metric thread 15 to 80 mm (Rp 1/2 to Rp 3).

i - Threaded valve body.

j - Flanged valve body.

## Globe Valve Body Specifications

Table 5 Specifications for 1/2" to 2" VB-7xxx Series and 2 1/2" and 3" VB-9xxx Series Globe Valve Bodies.

Specifications NPT, Rp Screwed Valve Bodies		2-Way	3-Way
			
<b>Applications</b>		Chilled or Hot Water, or Steam	Chilled or Hot Water
<b>Type of End Fitting</b>		NPT, Rp Screwed, Flared, Union Straightway	NPT, Rp Screwed, Flared
<b>Size</b>		<b>VB-7xxx Series</b> 1/2" through 2" (15 mm through 50 mm) <b>VB-9xxx Series</b> 2 1/2" and 3" (65 mm and 80 mm)	
<b>Action</b>		Stem Up Open or Stem Up Closed	Mixing or Diverting
<b>Valve Body Series<sup>a</sup></b>		Vx-72xx-0-4-P Vx-92xx-0-4-P	Vx-73xx-0-4-P Vx-93xx-0-4-P
<b>Flow Type</b>		Equal Percentage <sup>b</sup>	Linear <sup>b</sup>
<b>Valve Body Materials</b>	<b>Body</b>	Bronze	Bronze
	<b>Seat</b>	Bronze (VB-721x, VB-722x) Stainless Steel (VB-725x, VB-726x, VB-727x, VB-728x)	Bronze
	<b>Stem</b>	Stainless Steel	Stainless Steel
	<b>Plug</b>	Brass (VB-721x, VB-722x) Stainless Steel (VB-725x, VB-726x, VB-727x, VB-728x)	Brass (VB-73xx) Bronze (VB-931x)
	<b>Packing</b>	Spring-loaded PTFE	Spring-loaded PTFE
	<b>Disc</b>	EPDM (VB-721x, VB-722x)	—
		PTFE (VB-725x, VB-726x)	
None (VB-727x, VB-728x)			
<b>ANSI Pressure Class (Figure 3)</b>		250 psig (1724 kPa), up to 400 psig (2758 kPa) below 150 °F (66 °C) <sup>c</sup>	250 psig (1724 kPa), up to 400 psig (2758 kPa) below 150 °F (66 °C) <sup>b</sup>
<b>Pressure Class (VB-7xx5)</b>		PN16	PN16
<b>Rangeability</b>		See Table-1	500:1
<b>Seat Leakage</b>		ANSI Class IV (.01%) (VB-721x, VB-722x, VB-725x, VB-727x) ANSI Class III (0.1%) (VB-727x, VB-728x)	ANSI Class III (0.1%)
<b>STEAM</b>			
<b>Inlet Pressure — Maximum</b>		35 psig (241 kPa)	—
<b>Fluid Temperature — Maximum</b>		281 °F (138 °C) (VB-721x)	—
		340 °F (171 °C) (VB-725x, VB-726x)	
		400 °F (205 °C) (VB-727x, VB-728x)	
<b>Allowable Differential Pressure</b>		20 psi (138 kPa)	—
<b>WATER</b>			
<b>Fluid Temperature — Minimum</b>		<b>1/2" through 2"</b> 20 °F (-7 °C) <b>2 1/2" and 3"</b> 40 °F (4 °C)	<b>1/2" through 2"</b> 20 °F (-7 °C) <b>2 1/2" and 3"</b> 40 °F (4 °C)
<b>Fluid Temperature — Maximum</b>		<b>1/2" through 3"</b> 281 °F (138 °C)	<b>1/2" through 3"</b> 300 °F (149 °C)
<b>Allowable Differential Pressure<sup>d</sup></b>		35 psi (241 kPa) Max. for Normal Lifespan (refer to "Cavitation Limitations on Valve Pressure Drop", on page 18)	35 psi (241 kPa) Max. for Normal Lifespan (refer to "Cavitation Limitations on Valve Pressure Drop", on page 18)

<sup>a</sup>To determine a specific part number, see the Linked Globe Valve Assembly Part Numbering System.



<sup>b</sup>See "2-Way Valves" on page 5 or "3-Way Valves" on page 6 for a detailed description of the flow.

<sup>c</sup>See "2-Way Valves" on page 5 or "3-Way Valves" on page 6 for a detailed description of the flow/

<sup>d</sup>Maximum recommended differential pressure. Do not exceed the recommended differential pressure (pressure drop) or the integrity of valve parts may be affected. Exceeding the maximum recommended differential pressure voids the product warranty.

## Globe Valve Body Specifications

Table 6 Specifications for Flanged 2½" to 4" Vx-9xxx Series Globe Valve Bodies.

Specifications Flanged Valve Bodies		2-Way	3-Way
			
Applications		Chilled or Hot Water, or Steam	Chilled or Hot Water
Type of End Fitting		Flanged	Flanged
Size		2½ in. through 4 in.	2½ in. through 4 in.
Action		Stem Up Open or Stem Up Closed	Mixing
Valve Assembly Series		Vx-92xx-0-5-P	Vx-931x-0-5-P
Flow Type		Equal Percentage <sup>a</sup>	Linear <sup>a</sup>
Valve Body Materials	Body	Cast Iron	Cast Iron
	Seat	Bronze	Bronze
	Stem	Stainless Steel	Stainless Steel
	Plug	Bronze	Bronze
	Packing	Spring-loaded PTFE	Spring-loaded PTFE
	Disc	Composite	—
ANSI Pressure Class (Figure 3)		125 psig (862 kPa), 200 psig (1379 kPa) below 150 °F (66 °C) <sup>b</sup>	125 psig (862 kPa), 200 psig (1379 kPa) below 150 °F (66 °C) <sup>b</sup>
Rangeability		75:1	Exceeds 500:1
Seat Leakage		ANSI Class IV (.01%)	ANSI Class III (0.1%)
<b>STEAM</b>			
Inlet Pressure — Maximum		35 psig (241 kPa)	—
Fluid Temperature — Maximum		281 °F (138 °C)	
Allowable Differential Pressure <sup>c</sup>		20 psi (138 kPa)	
<b>WATER</b>			
Fluid Temperature — Minimum		40 °F (4 °C)	40 °F (4 °C)
Fluid Temperature — Maximum		281 °F (138 °C)	300 °F (149 °C)
Allowable Differential Pressure <sup>c</sup>		35 psi (241 kPa) Max. for Normal Lifespan (refer to "Cavitation Limitations on Valve Pressure Drop" on page 11)	35 psi (241 kPa) Max. for Normal Lifespan (refer to "Cavitation Limitations on Valve Pressure Drop" on page 11)

<sup>a</sup>See "2-Way Valves" on page 5 or "3-Way Valves" on page 6 for a detailed description of the flow.

<sup>b</sup>Do not apply the above pressure rating to the piping system.

<sup>c</sup>Maximum recommended differential pressure. Do not exceed the recommended differential pressure (pressure drop) or the integrity of valve parts may be affected. Exceeding the maximum recommended differential pressure voids the product warranty.

# Actuator Specifications and Valve Assembly Mounting Dimensions

## Valve Assemblies with MA51-710x, MF51-7103, and MS51-7103 1/2" (13 mm) Stroke 105 lbf (467 N) Linear Series Schneider Electric SmartX Actuators

### Actuator Specifications

<b>Inputs</b>	
Control Signal and Power Requirements (see table)	All 24 Vac circuits are Class 2. All circuits 30 Vac and above are Class 1
<b>Connections</b>	
Connecting wiring	
Mx51-710x-0x0	Appliance wire, 3 ft. (0.9 m) long
Mx51-710x-1x0	Plenum cable, 3 ft. (0.9 m) long
Conduit connectors	Enclosure accepts 1/2" (13 mm) conduit connectors. For M20 metric connector, use AM-756 adaptor
<b>Motor Type</b>	Brush DC motor
<b>Outputs</b>	
Electrical: Position feedback voltage	
MF51-7103-xxx and MS51-7103-xxx	For voltage ranges, the feedback signal is the same range as the input signal. The 0...20 mAdc current range and floating actuators have a 2...10 Vdc position feedback signal. The position feedback signal can supply up to 0.5 mA to operate up to four additional slave actuators
<b>Mechanical</b>	
Output force rating	105 lbf (467 N)
Linear stroke	1/2" (13 mm) nominal
Timing	
Manual override	Allows valve positioning and preload adjustment, using manual crank
Reverse acting/direct acting jumper	
MS51-7103-xxx	Permits reverse acting or direct acting linear motion

<b>Environmental</b>	
Temperature Limits	
Shipping and storage	-40...160 °F (-40...71 °C) ambient
Operating	-22...140 °F (-30...60 °C) ambient
Temperature restrictions	For maximum ambient of 140 °F (60 °C), maximum fluid temperature must not exceed 366 °F (186 °C)
Humidity	5...95% RH, non-condensing
Enclosure Rating	NEMA 2, UL Type 2 (IEC IP54) with customer-supplied watertight conduit connectors
<b>Agency Listings (Actuator)</b>	
UL	UL-873, Underwriters Laboratories File #E9429 Category Temperature-indicating and Regulating Equipment) UL Listed for use in Canada by Underwriters Laboratories Canadian Standards C22.2 No. 24-93 EMC Directive (89/336/EEC)
cUL	Low Voltage Directive (72/23/EEC)
European Community	This product meets requirements to bear the RSM Mark according to the terms specified by the Communications Authority under the Radiocommunications Act 1992
Australia	

Part Number	Approximate Stroke Timing in Seconds @ 70 °F (21 °C)	
	Powered	Spring Return
MA51-710x-xxx	27	19
MF51-710x-xxx	60	16
MS51-710x-xxx		

Part Number	Control Signal	Power Input				
		Voltage	Running 50/60 Hz		Holding 50/60 Hz	
			VA	W		DC Amps
MA51-7100-000	Two-position SPST	120 Vac ±10% 50/60 Hz	7.9	6.2	—	2.1
MA51-7101-000		230 Vac ±10% 50/60 Hz	7.4	5.4	—	2.1
MA51-7103-000, MA51-7103-100	Floating SPST	24 Vac ±20% 20 to 30 Vdc	5.3	4.1	0.15	1.2
MF51-7103-000, MF51-7103-100			6.9	4.7	0.16	2.1
MS51-7103-000, MS51-7103-100	2...10 Vdc Proportional		6.6	4.2	0.14	1.5
MS51-7103-020, MS51-7103-120	0...3 Vdc Proportional		7.8	4.9	0.16	3.4
MS51-7103-030, MS51-7103-130	6...9 Vdc Proportional					
MS51-7103-040, MS51-7103-140	0...10 Vdc Proportional		6.6	4.2	0.14	1.5
MS51-7103-050, MS51-7103-150	2...20 mAdc Proportional					
MS51-7103-060, MS51-7103-160	2...20 mAdc Proportional					

Dimensions — 1/2" to 2" Globe Valve Assemblies

Valve Assembly Part Number	Valve Size in.	Valve Dimensions in inches (mm)									
		2-Way (Refer to Figure-8, Figure-10, and Figure-11)					3-Way (Refer to Figure-9 and Figure-12)				
		A	B	C	E	J	A	C	E	J	
Union Straightway 2-Way (N.C.) Vx-7221-8xx-4-P	1/2	4-3/16 (106)	2-11/16 (68)	1-3/16 (30)	7-7/16 (189)	6-5/8 (168)	—				
	3/4	4-15/16 (125)	3-3/16 (81)	1-3/16 (30)	7-7/16 (189)	6-7/8 (175)	—				
	1	6 (152)	3-5/8 (92)	1-3/4 (44)	7½ (190)	7-3/8 (187)	—				
	1¼	6¼ (159)	3-15/16 (100)	1-3/4 (44)	7-3/4 (197)	7-3/8 (187)	—				
Union Straightway 2-Way (N.O.) Vx-7211-8xx-4-P	1/2	4-3/16 (106)	2-11/16 (68)	1-3/16 (30)	7-7/16 (189)	6-5/8 (168)	—				
	3/4	4-15/16 (125)	3-3/16 (81)	1-1/16 (27)	7-7/16 (189)	6-7/8 (175)	—				
	1	6 (152)	3-5/8 (92)	1-3/16 (30)	8-1/8 (206)	7-3/8 (187)	—				
	1¼	6¼ (159)	3-15/16 (100)	1-3/8 (35)	8-1/8 (206)	7-3/8 (187)	—				
Flared 2-Way Vx-7212-8xx-4-P Vx-7222-8xx-4-P 3-Way Vx-7312-8xx-4-P	1/2	4 (102)	—		1-3/16 (30)	7-7/16 (189)	7-3/32 (180)	4 (102)	2¼ (57)	7-7/16 (189)	7-3/32 (180)
NPT/Metric Thread 2-Way (N.C.) Vx-722x-8xx-4-P Vx-726x-8xx-4-P 3-Way Vx-731x-8xx-4-P Vx-732x-8xx-4-P	1/2	3-1/16 (78)	—		1-3/16 (30)	7-7/16 (189)	6-5/8 (168)	3-1/16 (78)	1-3/4 (44)	7-7/16 (189)	6-5/8 (168)
	3/4	3-5/8 (92)	—		1-3/16 (30)	7-7/16 (189)	6-7/8 (175)	3-5/8 (92)	1-13/16 (46)	7-7/16 (189)	6-7/8 (175)
	1	4-5/8 (118)	—		1-3/4 (44)	7½ (190)	7-3/8 (187)	4-5/8 (118)	1-3/4 (44)	7½ (191)	7-3/8 (187)
	1¼	4-5/8 (118)	—		1-3/4 (44)	7-3/4 (197)	7-3/8 (187)	4-5/8 (118)	1-3/4 (44)	7-3/4 (197)	7-3/8 (187)
	1½	5-3/8 (137)	—		1-13/16 (46)	7-7/8 (200)	7-13/16 (198)	5-3/8 (137)	1-13/16 (46)	7-7/8 (200)	7-13/16 (198)
	2	6-1/8 (156)	—		2¼ (57)	8-9/16 (217)	8-5/32 (208)	6-1/8 (156)	2¼ (57)	8-9/16 (217)	8-5/32 (208)
NPT/Metric Thread 2-Way (N.O.) Vx-721x-8xx-4-P Vx-725x-8xx-4-P Vx-727x-8xx-4-P	1/2	3-1/16 (78)	—		1-3/16 (30)	7-7/16 (189)	6-5/8 (168)	—			
	3/4	3-5/8 (92)	—		1-1/16 (27)	7-7/16 (189)	6-7/8 (175)	—			
	1	4-5/8 (118)	—		1-3/16 (30)	8-1/8 (206)	7-3/8 (187)	—			
	1¼	4-5/8 (118)	—		1-3/8 (35)	8-1/8 (206)	7-3/8 (187)	—			
	1½	5-3/8 (137)	—		1½ (38)	8-3/16 (208)	7-13/16 (198)	—			
	2	6-1/8 (156)	—		1-9/16 (40)	8-7/16 (214)	8-5/32 (208)	—			

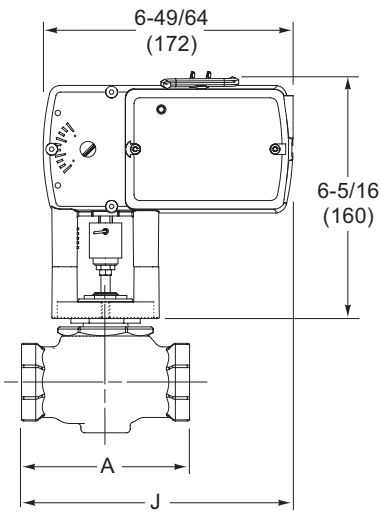


Figure 8 Mx51-710x with 2-Way Globe Valve.

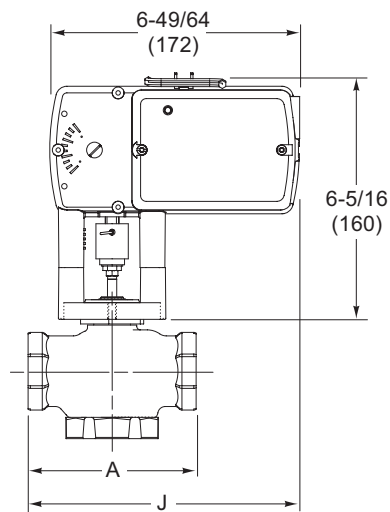


Figure 9 Mx51-710x with 3-Way Globe Valve.

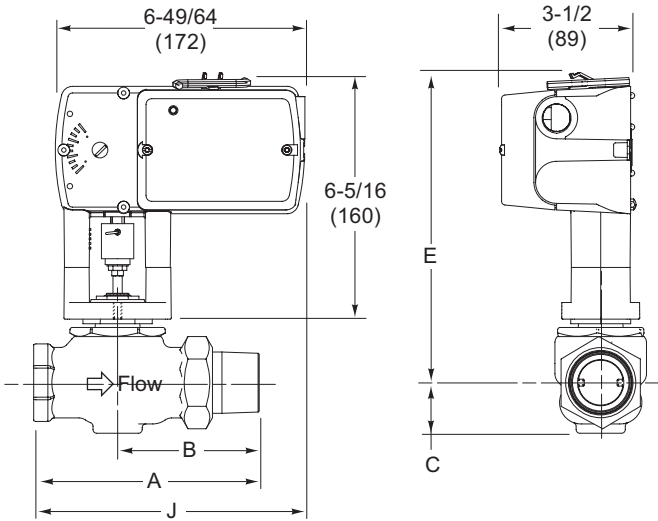


Figure 10 Mx51-710x with 2-Way Union Straightway Globe Valve.

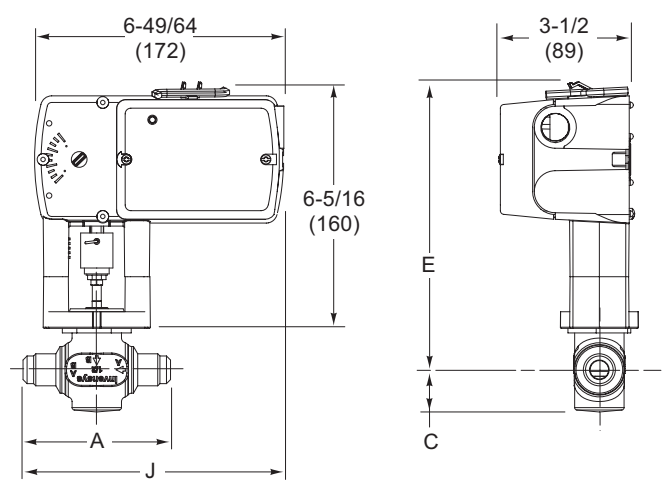


Figure 11 Mx51-710x with 2-Way Flared Globe Valve.

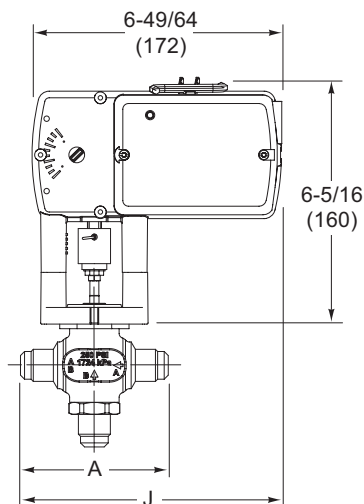


Figure 12 Mx51-710x with 3-Way Flared Globe Valve.

## Valve Assemblies with MA51-720x, MF51-7203, and MS51-7203 1/2" (13 mm) Nominal Stroke 220 lbf (979 N) Linear Series SmartX Actuators

### Actuator Specifications

<b>Inputs</b>	
Control Signal and Power Requirements (see table)	All 24 Vac circuits are Class 2 All circuits 30 Vac and above are Class 1
<b>Connections</b>	
Connecting wiring	Appliance cable, 3 ft. (91 cm) long
Conduit connectors	Enclosure accepts 1/2" (13 mm) conduit connectors. For M20 metric connector, use AM-756 adaptor
<b>Motor Type</b>	Brushless DC
<b>Outputs</b>	
<b>Electrical</b>	
Position feedback voltage: MS51-7203	2...10 Vdc (max. 0.5 mA) output signal for position feedback or to operate up to four additional slave actuators.

<b>Mechanical</b>	
Output force rating	220 lbf (979 N)
Linear stroke	1/2" (13 mm) nominal
Timing @ 70 °F (21 °C)	Approximately 100 seconds powered; 35 seconds spring return Measured with no load applied to actuator
Manual override	Allows valve positioning and preload adjustment, using manual crank
Right/left switch: MS51-7203	Permits reverse acting or direct acting linear motion
<b>Environmental</b>	
<b>Temperature Limits</b>	
Shipping and storage	-40...160 °F (-40...71 °C) ambient
Operating	0 °F (-18 °C) to maximum ambient shown in table below

Temperature restrictions	
Humidity	15...95% RH, non-condensing
Enclosure Rating	NEMA 2, UL Type 2 (IEC IP54) with customer-supplied watertight conduit connectors.

<b>Agency Listings (Actuator)</b>	
UL	UL-873, Underwriters Laboratories File #E9429 Category Temperature-indicating and Regulating Equipment
cUL	UL Listed for use in Canada by Underwriters Laboratories Canadian Standards C22.2 No. 24-93
European Community	EMC Directive (89/336/EEC) Low Voltage Directive (72/23/EEC)
Australia	This product meets requirements to bear the RSM Mark according to the terms specified by the Communications Authority under the Radiocommunications Act 1992

Part Number	Control Signal	Voltage	Power Input				DC Amps	Holding 50 / 60 Hz W
			Running					
			50 Hz		60 Hz			
VA	W	VA	W					
MA51-7200	Two-position SPST or Triacs	120 Vac ±10% 50/60 Hz	11.7	8.8	10.0	8.4	—	3.6/5.0
MA51-7201		230 Vac ±10% 50/60 Hz	15.5	9.5	10.6	8.5	—	4.6/3.3
MA51-7203		24 Vac ±20% 22...30 Vdc	9.8	7.5	9.7	7.5	0.29	2.8
MF51-7203	Floating Point SPDT or Triacs	24 Vac ±20% 22 to 30 Vdc	9.8	7.7	9.7	7.7	0.30	3.3
MS51-7203	Proportional 2...10 Vdc or 4-20 Vdc		9.8	7.4	9.7	7.4	0.28	2.9

Part Number		Max. Allowable Ambient @ Max. Fluid Temperatures
Actuator	Valve Assembly	
Mx51-720x	Vx-721x-59x-4-P, Vx-722x-59x-4-P	140 °F (60 °C) @ 281 °F (138 °C)
	Vx-73xx-59x-4-P	120 °F (49 °C) @ 300 °F (149 °C)
	Vx-725x-59x-4-P, Vx-726x-59x-4-P	100 °F (38 °C) @ 340 °F (171 °C)
	Vx-727x-59x-4-P, Vx-728x-59x-4-P	90 °F (32 °C) @ 366 °F (186 °C)

### Dimensions — 1/2" to 2" Globe Valve Assemblies

Valve Assembly Part Number	Valve Size in.	Valve Dimensions in inches (mm)							
		2-Way (Refer to Figure 13)				3-Way (Refer to Figure 14)			
		A	C	E	J	A	C	E	J
NPT/Metric Thread 2-Way (N.C.) Vx-722x-59x-4-P Vx-725x-59x-4-P Vx-726x-59x-4-P Vx-727x-59x-4-P Vx-728x-59x-4-P 3-Way Vx-73xx-59x-4-P	1 1/4	4-5/8 (117)	1-3/4 (44)	8-3/8 (213)	11-11/16 (297)	4-5/8 (117)	1-3/4 (44)	8-3/8 (213)	11-11/16 (297)
	1 1/2	5-3/8 (137)	1-13/16 (46)	8 1/2 (216)	12-1/16 (306)	5-3/8 (137)	1-13/16 (46)	8 1/2 (216)	12-1/16 (306)
	2	6-1/8 (156)	2 1/4 (57)	9-3/16 (233)	12-7/16 (316)	6-1/8 (156)	2 1/4 (57)	9-3/16 (233)	12-7/16 (316)
NPT/Metric Thread 2-Way (N.O.) Vx-721x-59x-4-P	1 1/4	4-5/8 (117)	1-3/8 (35)	8-3/4 (222)	11-11/16 (297)				
	1 1/2	5-3/8 (137)	1 1/2 (38)	8-13/16 (224)	12-1/16 (306)				
	2	6-1/8 (156)	1-9/16 (40)	9-1/16 (230)	12-7/16 (316)				



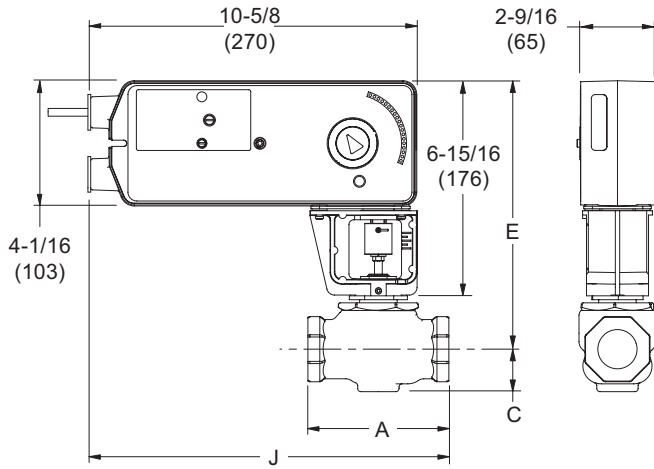


Figure 13 Mx51-720x with 1/2" to 2" 2-Way Globe Valve.

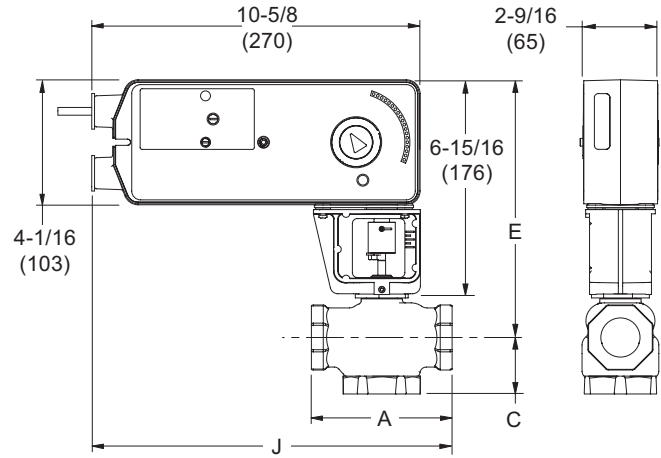


Figure 14 Mx51-720x with 1/2" to 2" 3-Way Globe Valve.

## Valve Assemblies with MA61-720x, MF61-7203, and MS61-7203 1" (25 mm) Nominal Stroke 220 lbf (979 N) Linear Series SmartX Actuators

### Actuator Specifications

<b>Inputs</b>	
Control Signal and Power Requirements( see table)	All 24 Vac circuits are Class 2 All circuits 30 Vac and above are Class 1
<b>Connections</b>	
Connecting wiring	Appliance cable, 3 ft. (91 cm) long
Conduit connectors	Enclosure accepts 1/2" (13 mm) conduit connectors. For M20 metric connector, use AM-756 adaptor
<b>Motor Type</b> Brushless DC.	
<b>Outputs</b>	
Electrical Position feedback voltage MS61-7203	2...10 Vdc (max. 0.5 mA) output signal for position feedback or to operate up to four additional slave actuators
<b>Mechanical</b>	
Output force rating	220 lbf (979 N) minimum; 495 lbf (2202 N) maximum stall
Linear stroke	1" (25 mm) nominal
Timing @ 70 °F (21 °C)	Approximately 190 seconds powered; 40 seconds spring return Measured with no load applied to actuator
Manual override	Allows valve positioning and preload adjustment, using manual crank
Right/left switch MS61-7203	Permits reverse acting or direct acting linear motion.

<b>Environmental</b>	
Temperature Limits	-40...160 °F (-40...71 °C) ambient
Shipping and storage	0 °F (-18 °C) to maximum ambient shown in table below
Operating	
<b>Temperature restrictions</b>	
Humidity	15...95% RH, non-condensing
Enclosure Rating	NEMA 2, UL Type 2 (IEC IP54) with customer-supplied watertight conduit connectors.
<b>Agency Listings (Actuator)</b>	
UL	UL-873, Underwriters Laboratories File #E9429 Category Temperature-indicating and Regulating Equipment
cUL	UL Listed for use in Canada by Underwriters Laboratories. Canadian Standards C22.2 No. 24-93
European Community	EMC Directive (89/336/EEC) Low Voltage Directive (72/23/EEC)
Australia	This product meets requirements to bear the RSM Mark according to the terms specified by the Communications Authority under the Radiocommunications Act 1992.

Part Number		Max. Allowable Ambient @ Max. Fluid Temperatures
Actuator	Valve Assembly	
Mx61-720x	Vx-9xxx-59x-4-P Vx-9xxx-59x-5-P	140 °F (60 °C) @ 300 °F (149 °C)

Part Number	Control Signal	Power Input						
		Voltage	Running				DC Amps	Holding
			50 Hz		60 Hz			50/60 Hz
VA	W	VA	W	W	W			
<b>MA61-7200</b>	Two-position SPST or Triacs	120 Vac ±10% 50/60 Hz	11.7	8.8	10.0	8.4	—	3.6/5.0
<b>MA61-7201</b>		230 Vac ±10% 50/60 Hz	15.5	9.5	10.6	8.5	—	4.6/3.3
<b>MA61-7203</b>		24 Vac ±20% 22 to 30 Vdc	9.8	7.5	9.7	7.5	0.29	2.8
<b>MF61-7203</b>	Floating Point SPDT or Triacs	24 Vac ±20% 22 to 30 Vdc	9.8	7.7	9.7	7.7	0.30	3.3
<b>MS61-7203</b>	Proportional 2...10 Vdc or 4-20 Vdc		9.8	7.4	9.7	7.4	0.28	2.9

Dimensions — 2½" and 3" Screwed Globe Valve Assemblies

Valve Assembly Part Number	Valve Size in.	Valve Dimensions in inches (mm)							
		2-Way (Refer to Figure-15)				3-Way (Refer to Figure-16)			
		A	C	E	J	A	C	E	J
NPT/Metric Thread 2-Way (N.O.) Vx-9213-59x-4-P, Vx-9215-59x-4-P 2-Way (N.C.) Vx-9223-59x-4-P, Vx-9225-59x-4-P 3-Way Vx-9313-59x-4-P, Vx-9315-59x-4-P	2½	8½ (216)	3-13/16 (97)	13-15/16 (354)	13-9/16 (344)	8½ (216)	4-5/8 (117)	13-15/16 (354)	13-9/16 (344)
	3	9½ (241)	4¼ (108)	14¼ (362)	13-5/8 (346)	9½ (241)	5 (127)	14¼ (362)	13-5/8 (348)

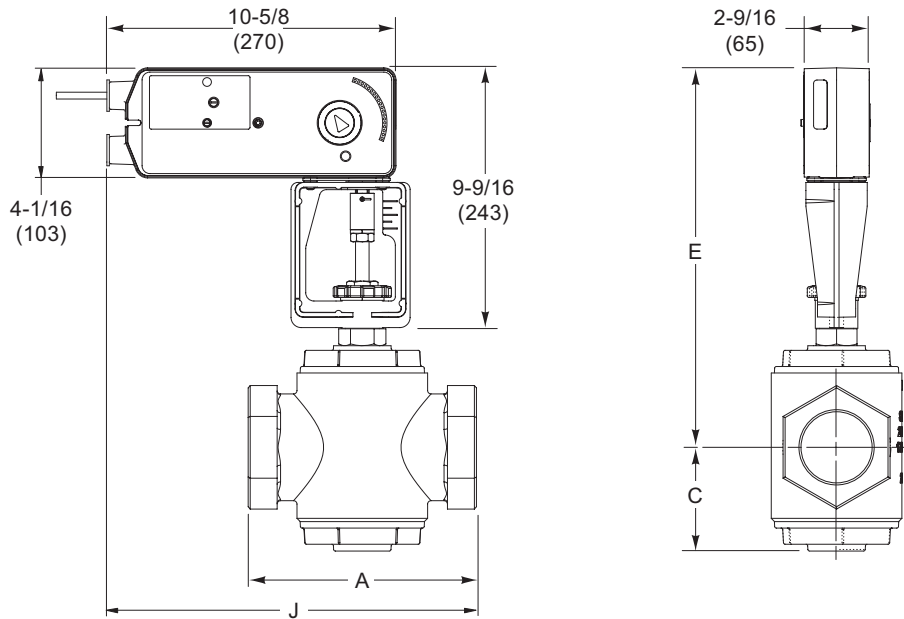


Figure 15 Mx61-720x with 2½" or 3" 2-Way Screwed Globe Valve.

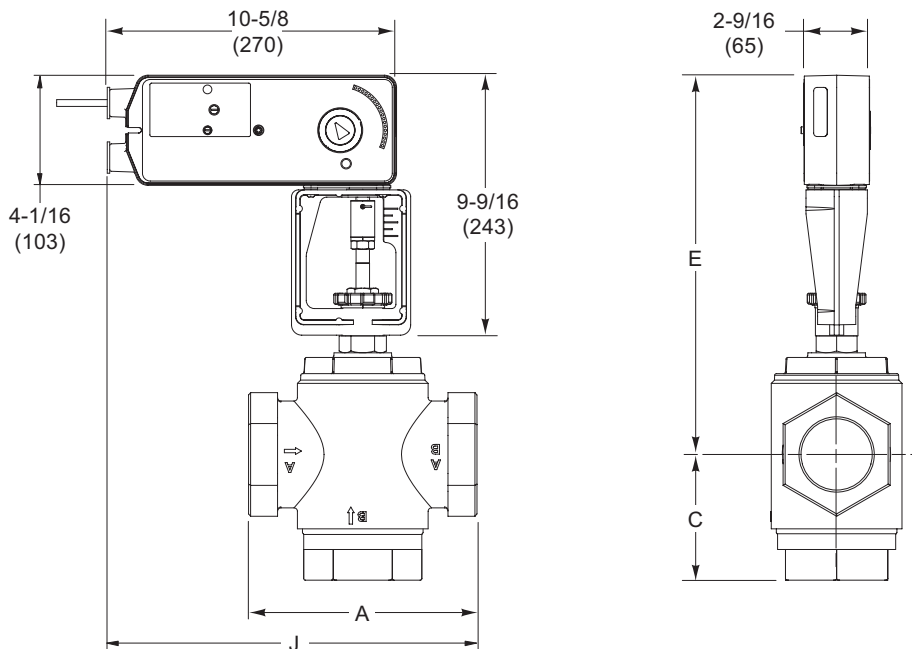


Figure 16 Mx61-720x with 2½" or 3" 3-Way Screwed Globe Valve.

Dimensions — 2½” to 4” Flanged Globe Valve Assemblies

Valve Assembly Part Number	Valve Size in.	Valve Dimensions in inches (millimetres)											
		2-Way (Refer to Figure-17)						3-Way (Refer to Figure-19)					
		A	C	E	F	G	J	A	C	E	F	G	J
ASA Flanged 2-Way (N.O.) Vx-9213-59x-5-P 3-Way Vx-9313-59x-5-P	2½	8½ (216)	3½ (89)	13 (330)	7 (178)	5½ (140)	13-5/8 (346)	8½ (216)	5-3/8 (137)	13-3/4 (349)	7 (178)	5½ (140)	13-5/8 (346)
	3	9½ (241)	3-3/4 (95)	14½ (368)	7½ (191)	6 (152)	14-1/8 (359)	9½ (241)	6-3/8 (162)	14 (356)	7½ (191)	6 (152)	14-1/8 (359)
	4	11½ (292)	4½ (114)	15-3/8 (391)	9 (229)	7½ (191)	15-1/8 (384)	11½ (292)	8½ (216)	14-3/4 (375)	9 (229)	7½ (191)	15-1/8 (384)
ASA Flanged 2-Way (N.C.) Vx-9223-59x-5-P	2½	8½ (216)	4 (107)	12-3/8 (314)	7 (178)	5½ (140)	13-5/8 (346)	—					
	3	9½ (241)	5 (127)	12-5/8 (320)	7½ (191)	6 (152)	14-1/8 (359)						
	4	11½ (292)	7-1/8 (181)	13-3/8 (340)	9 (229)	7½ (191)	15-1/8 (384)						

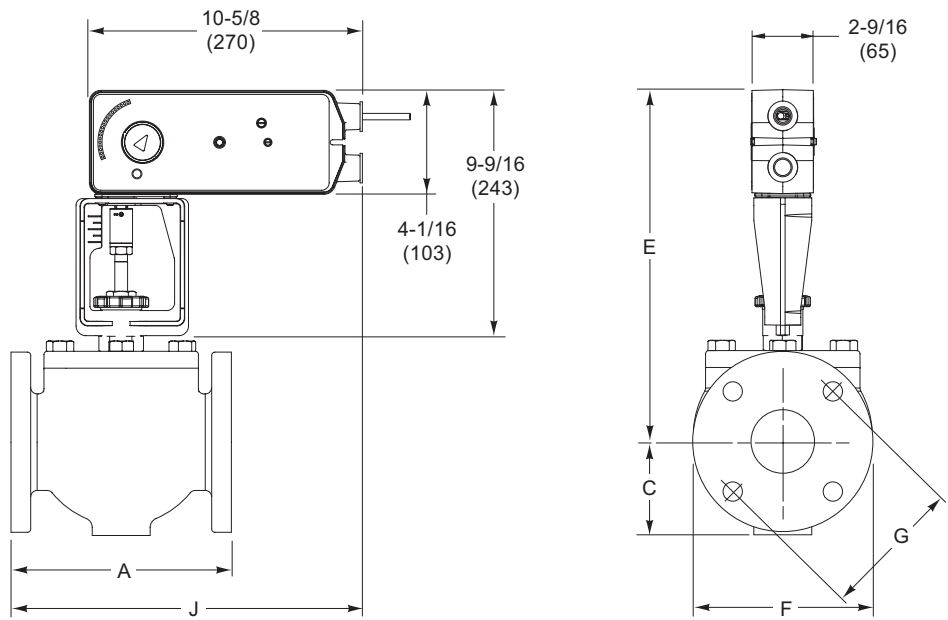


Figure 17 Mx61-720x with 2½” to 4” N.O. 2-Way Flanged Globe Valve.

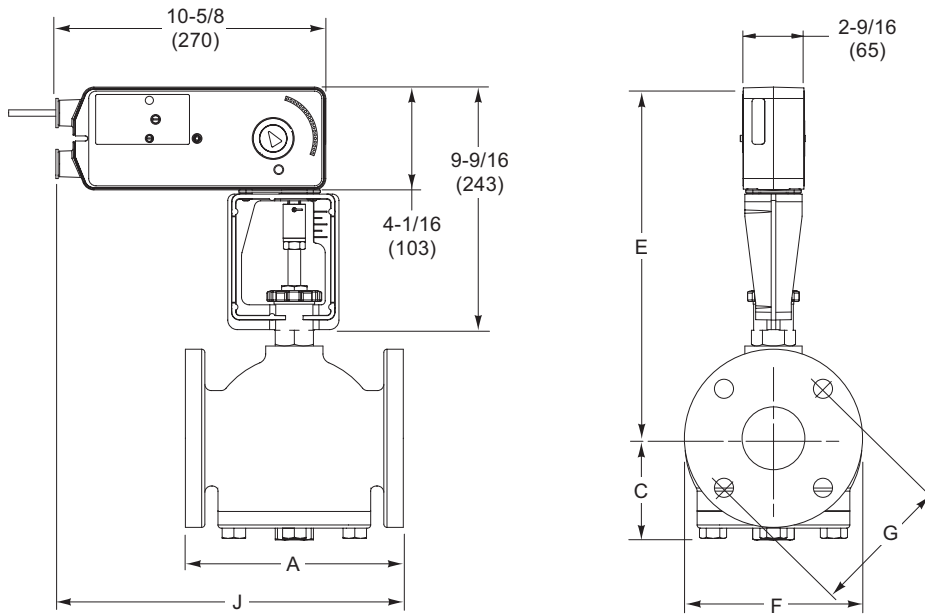


Figure-18 Mx61-720x with 2-1/2" to 4" N.C. 2-Way Flanged Globe Valve.

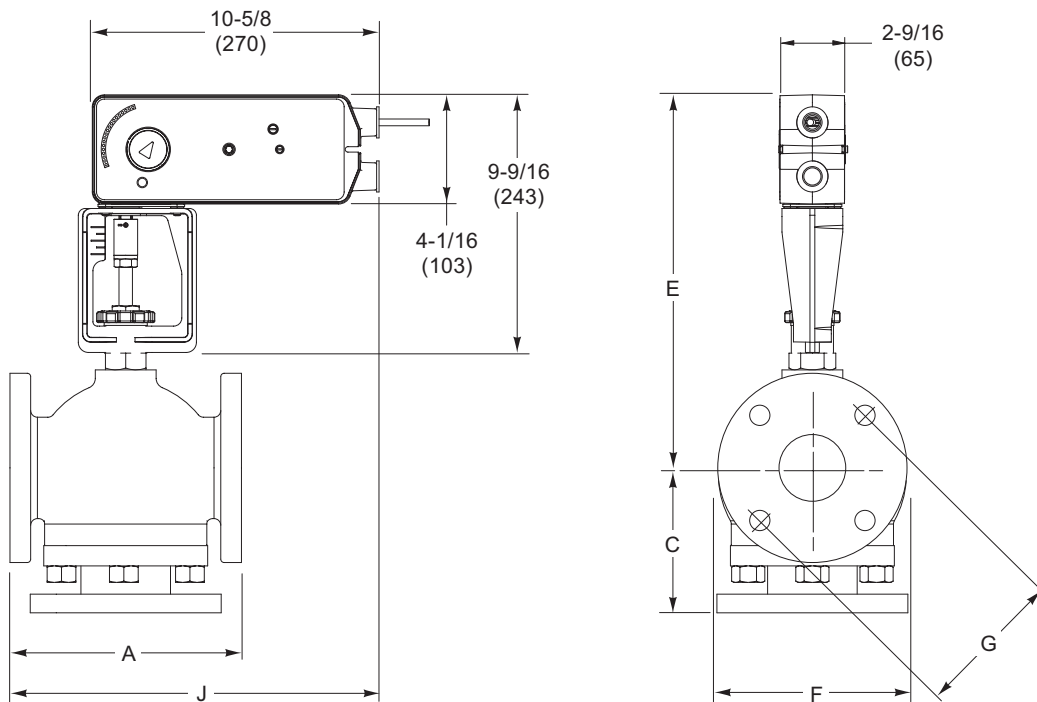


Figure-19 Mx61-720x with 2-1/2" to 4" 3-Way Flanged Globe Valve.

