

Product data sheet

Characteristics


8903LXO80V02

8903LX mechanically held lighting contactor, 8 P, 8 NO, 30 A, 600 V, 110/120 V 50/60 Hz coil, open

Product availability : Stock - Normally stocked in distribution facility



Price** : 1,173.00 USD

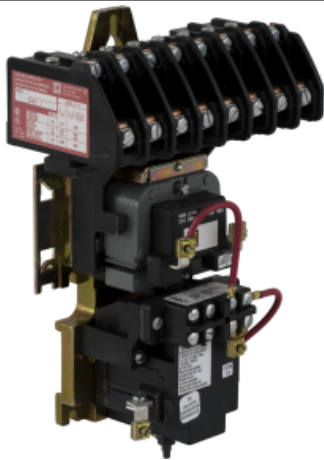

Main

Product or component type	Mechanically Held Lighting Contactor
Range of product	8903LX
Control Circuit	Separate control circuit

Complementary

Control Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Inrush power in VA	140 VA 60 Hz 170 VA 50 Hz 140 VA 50/60 Hz
Current Rating	20 A tungsten 30 A fluorescent
Number of Poles	8P 8 NO
Control Unit	No control units
Pilot Light	No indicator
Other Options	None
Electrical connection	Screw-clamp terminals
Height	8.82 in (224 mm)
Depth	3.27 in (83 mm)
Width	5.63 in (143 mm)

Environment

Enclosure Type	Not rated (open device)
Product certifications	UL listed CSA

Ordering and shipping details

Category	21322 - 8903 LX (NOT L)
Discount Schedule	CP1
GTIN	00785901057406
Package weight(Lbs)	2.45 kg (5.4 lb(US))
Returnability	Yes
Country of origin	MX

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Di(2-ethylhexyl)phthalate (DEHP) which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to www.p65warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Under investigation
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Contractual warranty

Warranty	18 months
----------	-----------