

## PW30 Series

# Remote Wet-to-Wet Differential Pressure Sensor

Revolutionary design eliminates plumbing/bypass assemblies  
16 selectable differential ranges in one device  
LCD display for verification of high, low, and differential pressures




### DESCRIPTION

The PW30 Series uses remote sensors to eliminate the need for costly bypass assemblies, enabling fast, cost effective installation. The remote sensors mount directly to pipe to eliminate bleeding and additional plumbing. Sensors come with both conduit and wire connection options. Optional factory pre-wired harnesses also available in wire and armored cable versions. Standard LCD screen and dip switches make configuration a breeze. Measure 16 differential pressure ranges from 1-500 PSID with a single device without sacrificing accuracy. Selectable output 0-5V, 0-10V, or 2 Wire 4-20mA.

### APPLICATIONS

- Demand measurement in HVAC systems for pump speed control and local indication
- Process control systems
- Flow measurement of gases, vapors, and liquids compatible with 316L SS
- Filter status monitoring
- System leak detection

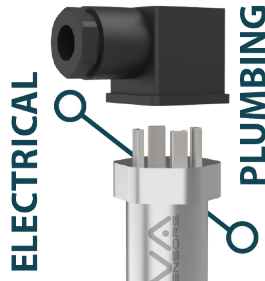


Remote sensors eliminate need for bypasses

Independent installation for mechanical & electrical trades

Available with prewired armored cable or exposed cable



Dip switch terminal and field selectable outputs for easy installation

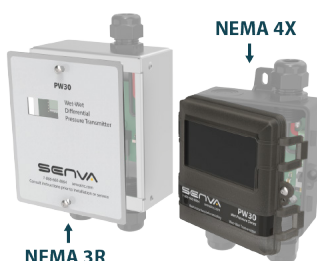

Metal or Plastic tamper resistant enclosures provided added layer of security







Accepts rigid conduit and field wiring


## FEATURES

- Drastically reduce plumbing needs and save installation time
- Order with pre-fabricated wire to save additional time
- Single device for 1-500 PSID makes ordering easy
- LCD and dip switches make configuration fast and simple
- Display kPa or PSID units
- Remote sensors come standard with DIN43650 connection for easy plug-and-play, no wire twisting
- MEMS sensor technology
- Integrated surge snubber protects sensor from water hammer for reliable long term performance
- Manual and remote zero for maintained accuracy
- Port swap corrects plumbing errors
- Fast/slow switch for desired response time
- Uni/bi directional
- Test mode - forces full scale output
- Conduit and wire connection compatible

## ORDERING

Transmitter		Cable		Remote Sensor	
PW30		—		—	
<b>Enclosure</b> W = Rugged Plastic M = Metal		<b>Cable Termination</b> C = Conduit and wire gland connections (for field wiring)		<b>Cable Type</b> Blank = Standard A = Armored	
		<b>Optional Factory Wire (Pre-wired)</b> 003 = 3 feet (36in) 006 = 6 feet (72in) 009 = 9 feet (108in) 015 = 15 feet (180in) 020 = 20 feet (240in) 025 = 25 feet (300in) 030 = 30 feet (360in) 035 = 35 feet (420in) 040 = 40 feet (480in) 045 = 45 feet (540in) 050 = 50 feet (600in) 075 = 75 feet (900in) 100 = 100 feet (1200in)			
				<b>PWT</b> 	
				<b>Range</b> 050 = 0-50 PSIG 100 = 0-100 PSIG 250 = 0-250 PSIG 500 = 0-500 PSIG	

### Optional Service Valve


**PWBV** 

Optional service valve PWBV for live sensor swap

### Optional Service Valve



## DIMENSIONS

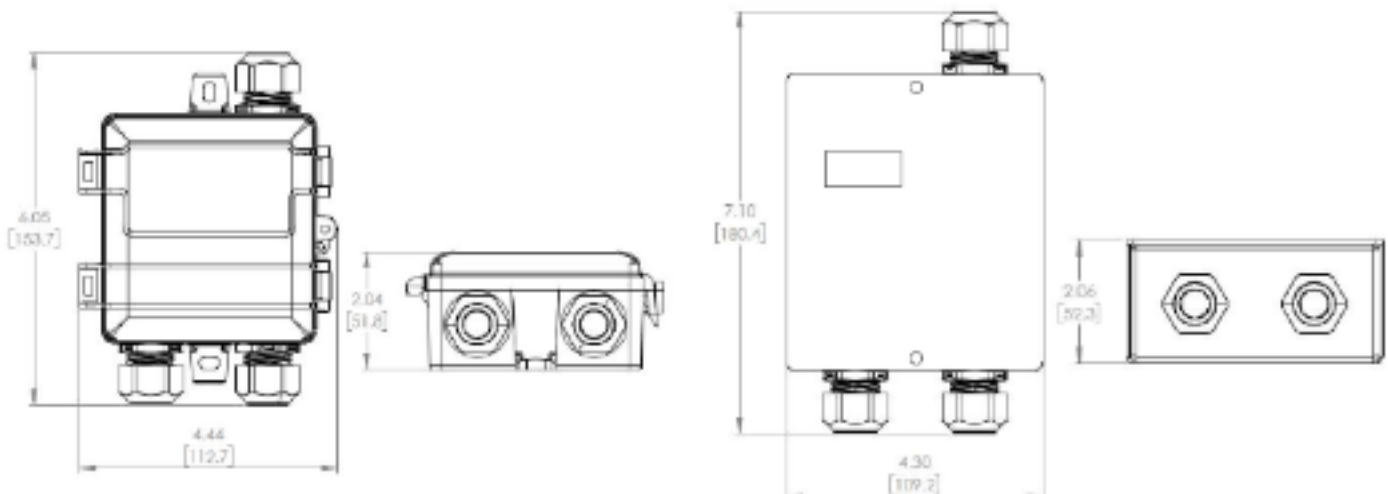

SPECIFICATIONS			
Power supply	Voltage output mode (0-5v)	12-30VDC/24VAC (1), 20mA max.	
	Voltage output mode (0-10v)	13-30VDC/24VAC required for 10V FS output	
	Current (4-20mA) output mode	15-30VDC (0 Ohm)/16-30VDC (250 Ohm)/18-30VDC (500 Ohm) , 20mA max.	
Outputs	Switch selectable	2-wire 4-20mA, 3-wire 0-5V/10V	
Operating Temperature	Transmitter	-22 to 158°F (-30 to 70°C)	
Media Compatibility	Type	Water, other 316 SS compatible media (316L diaphragm)	
	Temperature	32 to 250°F (0-125°C)	
Zero adjustment	Automatic	Pushbutton, terminal block switch input	
		Press button for 5 seconds to re-zero	
		Hold for 10 seconds to restore factory settings	
Sensor Type		Micro-machined silicon strain gauge	
PW Transmitter Accuracy	<i>Sensor PSIG</i>	<i>2% Accuracy Ranges</i>	<i>1% Accuracy Ranges</i>
	25 PSIG	0-1 / 0-2 PSID	0-5 / 0-10 / 0-15 / 0-20 / 0-25 PSID
	50 PSIG	0-10 / 0-15 PSID	0-20 / 0-25 / 0-30 / 0-40 / 0-50 PSID
	100 PSIG	0-15 / 0-20 / 0-25 / 0-30 PSID	0-40 / 0-50 / 0-75 / 0-100 PSID
	250 PSIG	0-30 / 0-40 / 0-50 PSID	0-75 / 0-100 / 0-125 / 0-150 / 0-250 PSID
	500 PSIG	0-75 / 0-100 / 0-125 PSID	0-150 / 0-250 / 0-500 PSID
Sensor Performance	Accuracy	< ±0.25% BFSL	
	Stability (1 year)	±0.25% FS, typ	
	Over-range protection	200% rated pressure	
	Pressure Cycles	> 100 Million	
	Compensated Range	14 to 158°F (-10-70°C)	
	Temperature Compensation %FS/C	Zero, <±0.03(<100kPa), <±0.02(>100kPa)	
		Span, <±0.03(<100kPa), <±0.02(>100kPa)	
	Vibration	10G peak, 20 to 2000 Hz	
Enclosure	Construction	PC/ABS (Plastic), Powder coated steel (metal)	
	Sealing	Nema 4X (plastic), Nema 3R (Metal)	
Enclosure, PWC[xxx] Sensor	Construction	Stainless Steel, 304, 1/4" MNPT, 1/2" Conduit Fitting	

(1) FS is defined as the full scale of the selected range. Accuracy includes non-linearity, hysteresis, and repeatability.

(2) Because of lower accuracy, it is not factory recommended to use an output range less than 10% of the total sensor PSIG.

\* Product improvement is a continual process as Senva and product features and specification may change without prior notice. Refer to instructions that accompany the product for installation and wiring.