

TG UL Series Wall & Duct Dual Refrigerant Gas Sensor/Controller

Analog and BACnet/Modbus protocol options
Field replaceable calibrated sensing elements
Standard LCD with intuitive set up menu
Integrated LED indicators and audible alarm

NEW!



DESCRIPTION

Senva TG Series sensors can be ordered as individual sensors or as any dual combination of refrigerant sensors in a shared enclosure. Refrigerant sensors may also be paired with any toxic or combustible gases, such as CO or Methane.

The analog output model features 2 outputs that support daisy chain wiring - multiple sensors may be used in a parallel sequence (0-10V) for cost effective coverage of large areas. The unit can also act as a stand alone controller, utilizing the relay for exhaust fan operation or the output for direct control of a VFD.

The BACnet/Modbus model supports BACnet MS/TP & Modbus network communication in one unit. Standard features include network auto-configuration, programmable fan and alarm relays, LED indicators, integrated display and audible alarm.



APPLICATIONS

- Ensure adequate air flow in occupied spaces
- Monitor for refrigerant leaks
- Alert building maintenance of elevated gas levels
- Directly control exhaust fans

FEATURES

Cost-effective dual gas sensing and control

- Integrated display, LED indicators, audible alarm
- Order as individual Refrigerant sensors, or specify any two sensing elements in one enclosure
- May be paired with any toxic or combustible gas sensor

Flexibility of analog output model

- Menu selectable 0-5/10V, 1-5V and 4-20mA outputs (0-10V default)
- Dual outputs support daisy chain wiring to cost-effectively sense and control large areas

Versatility with BACnet/Modbus model


- Supports BACnet MS/TP and Modbus RTU networks
- Auto-configuration detects network baud rate, serial format, protocol type and self-addresses

High reliability reduces call backs

- Temperature compensated elements for maximum accuracy
- Warning indicators alert occupants when element's lifecycle is near end for replacement
- 7-year limited warranty on electronics; 2-year on elements

Standard LCD and LED indicators

Removable terminal block

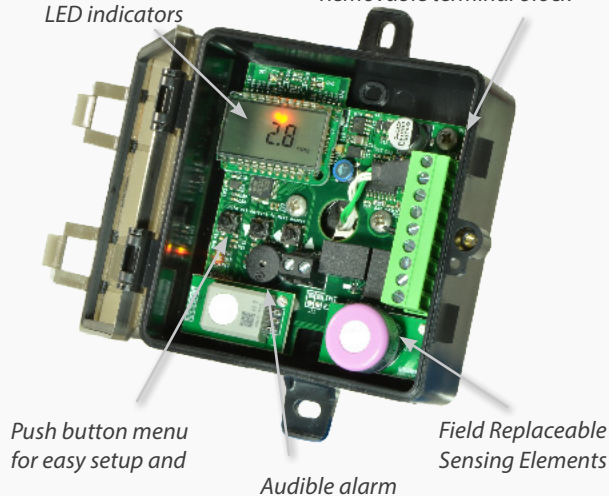

Push button menu for easy setup and

Audible alarm

Field Replaceable Sensing Elements

Easy to install

- Test mode speeds up field commissioning for verifying warning indicators and relay functions
- Push buttons and LCD to navigate setting parameters



ORDERING

	Pkg	Out	Gas1	Gas2	Temp	Lid
TG						
Package	W = Wall Mount M = Metal D = Duct Mount					
Output Type	A = Analog B = BACnet/Modbus					
Gas Type 1*	A = Ammonia 2 = R22 3 = R134A (Multi-Gas) 4 = R410A 5 = R404A 6 = R407C 7 = R449A 8 = R513A C = CO N = NO ₂					
Gas Type 2	X = No second gas A = Ammonia 2-8 = Refrigerants (See above)					
Temperature Output	A = None C = 100Pt RTD D = 1000Pt RTD E = 10K Type 2 F = 10K Type 3 G = 10k w/11k H = 3k I = 2k2 J = 1k8					
Enclosure Lid	Blank = Clear/Tinted S = Solid/Opaque W = All White Solid					

*Refrigerant gas sensors may be paired with all other TG gas offerings, except Methane, Propane, and Hydrogen. See combustibles spec sheet for list of options.

Replacement Elements

TGS-A-UL = Ammonia
 TGS-2-UL = R22
 TGS-3-UL = R134A (multi-gas)
 TGS-4-UL = R410A
 TGS-5-UL = R404A
 TGS-6-UL = R407C



Scan here to see
refrigerant cross-
sensitivities



SPECIFICATIONS

Power Supply	15-30VDC/24VAC ⁽¹⁾ , 4W max, 160mA max.
Analog Outputs	2 programmable outputs
	Output scaling
BACnet /Modbus	Protocol RS-485
	Baud Rates
Fan Relay	Fan relay characteristics
	Fan relay setpoint
Alarm Relay	Alarm relay characteristics
	Alarm relay setpoint
Display	3-1/2 digit LCD
LEDs	Green, Yellow, Red
Audible Alarm	85dB Piezo transducer
	Type
	Detection Range
	Resolution
General Purpose Sensor Performance	R22, R134A, R410A, R404A, R407C, R5133A, R449A
	R134A Sensitivity ⁽²⁾
	Other detectable gases ⁽³⁾
	Life expectancy
	Coverage Area
	Type
Ammonia Sensor Performance	Accuracy
	Resolution
	Life expectancy
	Coverage Area
	Type
CO Sensor Performance	Accuracy
	Resolution
	Certifications
	Life expectancy
	Coverage Area
	Type
NO ₂ Sensor Performance	Accuracy
	Resolution
	Life expectancy
	Coverage Area
Operating Environment	Temperature, continuous
	Humidity
	Max Elevation
Enclosure (Wall & Duct)	Material
	Dimensions
	Conduit Opening
	Rating
	Material & Enclosure Rating
	Dimensions
Enclosure (Metal)	Opening
	Mounting
	Rating
Agency	Compliance

(1) One side of transformer secondary is connected to signal common. Dedicated transformer is recommended. No mains circuit connection allowed. In addition, it is required to use an isolated power supply that is certified by a national or international standard (i.e. UL). Use of a Class 2 LPS power supply or greater is required.

(2) R134A sensor is factory calibrated to R134A gas but may be used as a general purpose refrigerant sensor. Sensitivity to some other gases can be found in the installation manual. Actual response may vary depending on installation. For more accurate response to a specific gas, a unit may be field calibrated.

(3) These gases may be detected by the sensor but sensitivity curves are not available at this time.