

# Submittal Data Information

## SmartPlus Hot Water Recirculation


Effective: March 31, 2017

Supersedes: October 20, 2015


Job: \_\_\_\_\_ Engineer: \_\_\_\_\_ Contractor: \_\_\_\_\_ Rep: \_\_\_\_\_

ITEM NO.	MODEL NO.


### Mounting Positions



STANDARD



OPTIONAL



OK IF OVER 20 PSI

### Model Nomenclature

- IQ – SmartPlus
- B – Bronze
- BC – Bronze, Panel Mount Tap
- ST – Stainless Steel, 3/4" FNPT
- SF – Stainless Steel, Flanged
- IFC – Integral Flow Check


### Performance Data

Model	Flow Range	Head Range
006	0 - 11.5 GPM	0 - 9.5 Feet
008	0 - 15 GPM	0 - 15 Feet
006-IFC	0 - 9 GPM	0 - 8.5 Feet
008-IFC	0 - 13 GPM	0 - 14.5 Feet


### Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
006	115	60	1	0.52	3250	1/40
008				0.84		1/25

Model 006

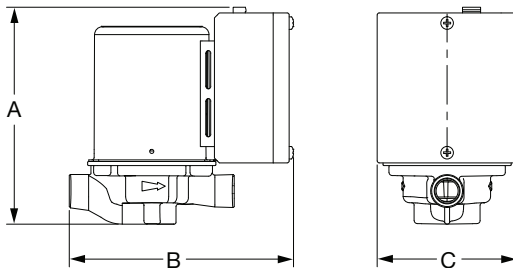

Model 008

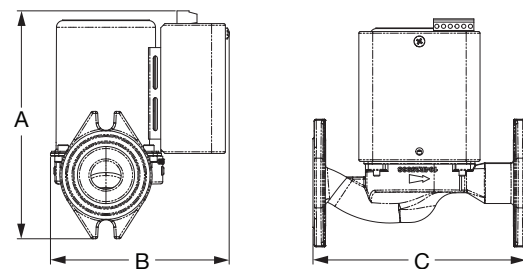

Model	Connection	Casing	A		B		C		Ship Wt.	
			In.	mm.	In.	mm.	In.	mm.	lbs.	kg
006-IQB4	3/4" Sweat	Bronze	6-1/2	165	6	152	3-3/4	95	7.0	3.2
006-IQBC4	1/2" Sweat									
006-IQBC7-IFC	3/4" Sweat									
006-IQBC7-1IFC	1/2" Sweat									
006-IQST4	3/4" NPT	Stainless Steel	6-1/2	165	5-1/2	140	6-1/2	165	8.0	3.6
008-IQSF6	Flanged		7	177						
008-IQSF6-IFC	Flanged									

