

Customizable Fail-Safe multifunction technology actuator for controlling dampers in typical commercial HVAC applications.

- Torque motor 90 in-lb [10 Nm]
- Nominal voltage AC/DC 24 V
- Control MFT/programmable
- Position feedback 2...10 V
- 2 x SPDT





NFX24-MFT-S

5-year warranty





## Manual State of State

### Technical data

Nominal voltage	AC/DC 24 V
Nominal voltage frequency	50/60 Hz
Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
Power consumption in operation	6.5 W
Power consumption in rest position	3 W
Transformer sizing	9 VA
Auxiliary switch	2 x SPDT, 1 mA3 A (0.5 A inductive), DC 5 VAC 250 V, one set at 10°, one adjustable 1090°
Switching capacity auxiliary switch	1 mA3 A (0.5 A inductive), DC 5 VAC 250 V
Electrical Connection	(2) 18 GA appliance cables, 1 m, 3 m or 5 m, with or without 1/2" conduit connectors
Overload Protection	electronic throughout 095° rotation
Electrical Protection	actuators are double insulated
Torque motor	90 in-lb [10 Nm]

### **Functional data**

Electrical Protection	actuators are double insulated
Torque motor	90 in-lb [10 Nm]
Operating range Y	210 V
Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)
Input impedance	100 kΩ for 210 V (0.1 mA), 500 Ω for 420
input impedance	mA, 1500 $\Omega$ for PWM, On/Off and Floating point
Operating range Y variable	Start point 0.530 V
	End point 2.532 V
Operating modes optional	variable (VDC, PWM, on/off, floating point)
Position feedback U	210 V
Position feedback U note	Max. 0.5 mA
Position feedback U variable	VDC variable
Direction of motion motor	selectable with switch 0/1
Direction of motion fail-safe	reversible with cw/ccw mounting
Manual override	5 mm hex crank (3/16" Allen), supplied
Angle of rotation	95°
Angle of rotation note	adjustable with mechanical end stop, 3595°
Running Time (Motor)	150 s / 90°
Running time motor variable	40150 s
Running time fail-safe	<20 s @ -4122°F [-2050°C], <60 s @ -22°F
	[-30°C]
Adaptation Setting Range	off (default)
Override control	MIN (minimum position) = 0%
	MID (intermediate position) = 50%
	MAX (maximum position) = 100%
Noise level, motor	40 dB(A)
Noise level, fail-safe	62 dB(A)



### **Functional data**

### Safety data

Position indication	Mechanical
Power source UL	Class 2 Supply
Degree of protection IEC/EN	IP54
Degree of protection NEMA/UL	NEMA 2
Enclosure	UL Enclosure Type 2
Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02 CE acc. to 2014/30/EU and 2014/35/EU
Quality Standard	ISO 9001
UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
Ambient humidity	Max. 95% RH, non-condensing
Ambient temperature	-22122°F [-3050°C]
Storage temperature	-40176°F [-4080°C]
Servicing	maintenance-free
Weight	3.8 lb [1.7 kg]
Housing material	Galvanized steel and plastic housing

**Footnotes** 

Weight

Materials

\*Variable when configured with MFT options.

†Rated Impulse Voltage 800V, Type of Action 1.AA.B, Control Pollution Degree 3.

### **Product features**

### Default/Configuration

Default parameters for 2 to 10 VDC applications of the NF..-MFT actuator are assigned during manufacturing. If required, custom versions of the actuator can be ordered. The parameters are variable and can be changed by three means: Factory pre-set or custom configuration, set by the customer using PC-Tool software or the handheld ZTH US.

### **Application**

For fail-safe, modulating control of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications. A feedback signal is provided for position indication.

### Operation

The NF..24-MFT actuator provides 95° of rotation and is provided with a graduated position indicator showing 0° to 95°. The actuator will synchronize the 0° mechanical stop or the physical damper or valve mechanical stop and use this point for its zero position during normal control operations. A unique manual override allows the setting of any actuator position within its 95° of rotation with no power applied. This mechanism can be released physically by the use of a crank supplied with the actuator. When power is applied the manual override is released and the actuator drives toward the fail-safe position. The actuator uses a brushless DC motor which is controlled by an Application Specific Integrated Circuit (ASIC) and a microprocessor. The microprocessor provides the intelligence to the ASIC to provide a constant rotation rate and to know the actuators's exact position. The ASIC monitors and controls the brushless DC motor's rotation and provides a Digital Rotation Sensing (DRS) function to prevent damage to the actuator in a stall condition. The position feedback signal is generated without the need for mechanical feedback potentiometers using DRS. The actuator may be stalled anywhere in its normal rotation without the need of mechanical end switches. The NF..24-MFT is mounted directly to control shafts up to 1.05" diameter by means of its universal clamp and anti-rotation bracket. A crank arm and several mounting brackets are available for damper applications where the actuator cannot be direct coupled to the damper shaft. The spring return system provides minimum specified torque to the application during a power interruption. The NF..24-MFT actuator is shipped at 5° (5° from full fail-safe) to provide automatic compression against damper gaskets for tight shut-off.







### Typical specification

Spring return control damper actuators shall be direct coupled type which require no crank arm and linkage and be capable of direct mounting to a jackshaft up to a 1.05" diameter. The actuator must provide modulating damper control in response to a 2 to 10 VDC or, with the addition of a  $500\Omega$  resistor, a 4 to 20 mA control input from an electronic controller or positioner. The actuators must be designed so that they may be used for either clockwise or counter clockwise fail-safe operation. Actuators shall use a brushless DC motor controlled by a microprocessor and be protected from overload at all angles of rotation. Run time shall be constant, and independent of torque. A 2 to 10 VDC feedback signal shall be provided for position feedback. Actuators shall be cULus listed and have a 5 year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

### **Factory settings**

Default parameters for 2 to 10 VDC applications of the NF..-MFT actuator are assigned during manufacturing. If required, custom versions of the actuator can be ordered. The parameters are variable and can be changed by three means: Factory pre-set or custom configuration, set by the customer using PC-Tool software or the handheld ZTH US.

### Accessories

Gateways	Description	Туре
	Gateway MP to BACnet MS/TP	UK24BAC
	Gateway MP to Modbus RTU	UK24MOD
	Gateway MP to LonWorks	UK24LON
Electrical accessories	Description	Туре
	DC Voltage Input Rescaling Module	IRM-100
	Auxiliary switch, mercury-free	P475
	Auxiliary switch, mercury-free	P475-1
	Convert Pulse Width Modulated Signal to a 210 V Signal for Belimo	PTA-250
	Proportional Actuators	
	Positioner for wall mounting	SGA24
	Positioner for front-panel mounting	SGF24
	Cable conduit connector 1/2"	TF-CC US
	Gateway MP to BACnet MS/TP	UK24BAC
	Gateway MP to LonWorks	UK24LON
	Gateway MP to Modbus RTU	UK24MOD
	Resistor, 500 $\Omega$ , 1/4" wire resistor with 6" pigtail wires	ZG-R01
	Resistor kit, 50% voltage divider	ZG-R02
	Transformer, AC 120 V to AC 24 V, 40 VA	ZG-X40



### **Technical data sheet** NFX24-MFT

### Mechanical accessories

Description	Туре
Anti-rotation bracket, for AF / NF	AF-P
Shaft extension 240 mm ø20 mm for damper shaft ø822.7 mm	AV8-25
End stop indicator	IND-AFB
Shaft clamp reversible, for central mounting, for damper shafts ø12.7 / 19.0 / 25.4 mm	K7-2
Ball joint suitable for damper crank arm KH8 / KH10, Multipack 10 pcs.	KG10A
Ball joint suitable for damper crank arm KH8, Multipack 10 pcs.	KG8
Damper crank arm Slot width 8.2 mm, clamping range ø1425 mm	KH10
Damper crank arm Slot width 8.2 mm, for ø1.05"	KH12
Damper crank arm Slot width 8.2 mm, clamping range ø1018 mm	KH8
Actuator arm, for 3/4" shafts, clamping range ø1022 mm, Slot width 8.2 mm	KH-AFB
Push rod for KG10A ball joint 36" L, 3/8" diameter	SH10
Push rod for KG6 & KG8 ball joints (36" L, 5/16" diameter).	SH8
Wrench 0.32 in and 0.39 in [8 mm and 10 mm]	TOOL-06
RetroFIT clip	Z-AF
Mounting bracket for AF	ZG-100
Mounting bracket	ZG-101
Mounting bracket	ZG-109
Linkage kit	ZG-110
Mounting bracket	ZG-118
for AF / NF	
Jackshaft mounting bracket.	ZG-120
Mounting kit for linkage operation for flat and side installation	ZG-AFB
Mounting kit for foot mount installation	ZG-AFB118
Damper clip for damper blade, 3.5" width.	ZG-DC1
Damper clip for damper blade, 6" width.	ZG-DC2
1" diameter jackshaft adaptor (11" L).	ZG-JSA-1
1-5/16" diameter jackshaft adaptor (12" L).	ZG-JSA-2
1.05" diameter jackshaft adaptor (12" L).	ZG-JSA-3
Weather shield 13x8x6" [330x203x152 mm] (LxWxH)	ZS-100
Base plate, for ZS-100	ZS-101
Weather shield 406x213x102 mm [16x8-3/8x4"] (LxWxH)	ZS-150
Explosion proof housing 16x10x6.435" [406x254x164 mm] (LxWxH), UL	ZS-260
and CSA, Class I, Zone 1&2, Groups B, C, D, (NEMA 7), Class III, Hazardous (classified) Locations	
Weather shield 17-1/4x8-3/4x5-1/2" [438x222x140 mm] (LxWxH), NEMA 4X, with mounting brackets	ZS-300
Weather shield 17-1/4x8-3/4x5-1/2" [438x222x140 mm] (LxWxH), NEMA 4X, with mounting brackets	ZS-300-5
Shaft extension 1/2"	ZS-300-C1
Shaft extension 3/4"	ZS-300-C2
Shaft extension 1"	ZS-300-C3
Base plate extension	Z-SF
Linkage kit	ZG-JSL
Jackshaft Retrofit Linkage with Belimo Rotary Actuators	•
Description	Туре
Connecting cable 16 ft [5 m], A: RJ11 6/4 ZTH EU, B: free wire end for	ZK2-GEN
connection to MP/PP terminal	
Connecting cable 10 ft [3 m], A: RJ11 6/4 ZTH EU, B: 3-pin Weidmüller and	ZK4-GEN
supply connection	
Service Tool, with ZIP-USB function, for programmable and	ZTH US
communicative Belimo actuators, VAV controller and HVAC performance devices	
Belimo PC-Tool, Software for adjustments and diagnostics	MFT-P
Signal simulator, Power supply AC 120 V	PS-100
• • • • • • • • • • • • • • • • • • • •	

### **Electrical installation**



Tools

## Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual



who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Meets cULus requirements without the need of an electrical ground connection.

Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or combined operation of line voltage/safety extra low voltage is not allowed.

(A) Actuators with appliance cables are numbered.

Provide overload protection and disconnect as required.

Actuators may also be powered by DC 24 V.

Two built-in auxiliary switches (2x SPDT), for end position indication, interlock control, fan startup, etc.


Only connect common to negative (-) leg of control circuits.

 $\bigwedge$  A 500  $\Omega$  resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.

🛕 Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 V line. For triac sink the Common connection from the actuator must be connected to the Hot connection of the controller. Position feedback cannot be used with a triac sink controller; the actuator internal common reference is not compatible.


Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

IN4004 or IN4007 diode. (IN4007 supplied, Belimo part number 40155).



VDC/mA Control

### Wiring diagrams



Connection of a notebook for parametrisation and manual control via RJ45.

Optional connection via RJ45 (direct connection Notebook / connection via Intranet or Internet) for access to the integrated web server

### Cable colors:

1 = black


2 = red


5 = orange

10 = yellow-black

11 = yellow-pink


12 = yellow-grey

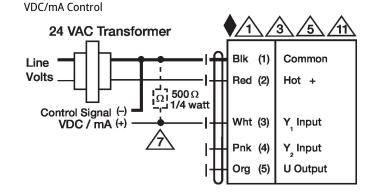






**PWM Control** 

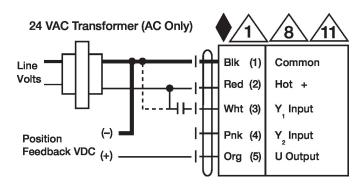



# Auxiliary Switches S1 S2 NC NO NO 10° to 90° NO 10° to 90°

### **Dimensions**

