

Technical data sheet

Z2075QPT-G

ZoneTight™, 2-way, Internal thread

- For closed cold and warm water systems
- For modulating control of air-handling and
- heating systems on the water side
- Snap-assembly of the actuator





Type overview

Туре	DN
Z2075QPT-G	20

Technical data

Functional data	Valve size [mm]	0.75" [20]				
	Fluid	chilled or hot water, up to 60% glycol				
	Fluid Temp Range (water)	2100°C [36212°F]				
	Differential pressure	550 psi				
	Body Pressure Rating	360 psi				
	Close-off pressure ∆ps	200 psi				
	Flow characteristic	equal percentage				
	Leakage rate	0% Operating range 1590°				
	Angle of rotation note					
	Pipe connection	Internal thread NPT (female)				
	Installation orientation	upright to horizontal (in relation to the stem)				
	Servicing	maintenance-free				
	Flow Pattern	2-way				
	Controllable flow range	75°				
Materials	Valve body	forged brass				
	Stem	stainless steel				
	Stem seal	EPDM O-ring				
	Seat	PTFE, O-Ring EPDM				
	Characterized disc	incorporated into the ball				
	Diaphragm	EPDM				
	O-ring	EPDM				
	Ball	stainless steel				
Suitable actuators	Non Fail-Safe	CQB(X)				
	Electrical fail-safe	CQKB(X)				
Terms	Abbreviations	V'nom = nominal flow with valve completely opened V'max = maximum flow, set by the angle of rotation limitation on the actuator				



Safety notes



WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov
 If temperature exceeds 212°F operating range due to a boiler control failure the valve will safely contain the hot water but manufacturers product warranty becomes invalid. Valve and actuator replacement is at the expense of others.


Product features

Application	The PIQCV zone valves with its pressure independent technology are suited for large commercial buildings where higher close-off and dynamic balancing is required. Common applications include unit ventilators, fan coil units, VAV reheat coils, fin tube casing, radiant panels and duct coils. The valve fits in space restricted areas and can be assembled without the use of tools.
Operating mode	The ball valve is adjusted by a rotary actuator. The actuator is controlled by a commercially available modulating or 3-point control system and moves the ball of the valve – the throttling device – to the position dictated by the control signal. Open the characterized control valve counterclockwise and close it clockwise.
Flow characteristic	Equal percentage flow control is ensured by the special design of the ball.
Constant flow volume	With a differential pressure of 16350 kPa, a constant flow volume is achieved thanks to the integrated pressure regulating valve. Independently of the differential pressure through the valve, a valve authority of 1 is achieved. Even with pressure variations and in the partial load range, the flow rate remains constant with each respective opening position (angle of rotation) and ensures a steady control.

Installation notes

Permissible installation orientation

The ball valve can be installed upright to horizontal. The ball valve may not be installed in a hanging position, i.e. with the stem pointing downwards.



Water quality requirements

Belimo valves are regulating devices. For the valves to function correctly in the long term, they must be kept free from particle debris (e.g. welding beads during installation work). The installation of a suitable strainer is recommended.


Servicing Ball valves and rotary actuators are maintenance-free.

Before any service work on the control element is carried out, it is essential to isolate the rotary actuator from the power supply (by unplugging the electrical cable if necessary). Any pumps in the part of the piping system concerned must also be switched off and the appropriate slide valves closed (allow all components to cool down first if necessary and always reduce the system pressure to ambient pressure level).

The system must not be returned to service until the ball valve and the rotary actuator have been correctly reassembled in accordance with the instructions and the pipeline has been refilled by professionally trained personnel.



The direction of flow, specified by an arrow on the housing, is to be complied with, since **Flow direction** otherwise the ball valve could become damaged. Please ensure that the ball is in the correct position (marking on the stem).

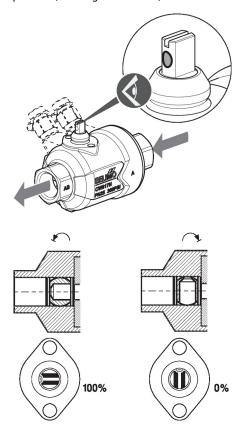

Flow setting

The angle of rotation of the CQ.. actuator can be changed by end stop clip in 2.5° increments. This is used to set the V'max value (maximum flow rate of the valve).

Remove end stop clip and place at desired position.


After every change of the flow setting by means of end stop clip, an adaptation must be triggered on the modulating actuators.

Volue Model							Cli	p Pos	ition f	or Flo	w Adj	ustme	ent (G	PM)						
Valve Model (1/2")	1	1+	2-	2	2+	3-	3	3+	4-	4	4+	5-	5	5+	6-	6	6+	N-	N	No Clip
																			<u> </u>	
Z2050QPT-B			0.1					0.2			0.3		0.4		0.5		0.6	0.7	0.8	0.9
· · ·	0.2		0.1	0.3			0.4	0.2 0.5		0.6	0.3 0.7	0.8	0.4 0.9	1.0	0.5 1.2	1.3	0.6 1.5	0.7 1.6	0.8 1.8	0.9 2.0
Z2050QPT-B	0.2		0.1	0.3 0.6		0.7	0.4 0.8		1.0	0.6 1.3		0.8 1.7		1.0 2.2		1.3 2.8		<u> </u>		
Z2050QPT-B Z2050QPT-D			0.1			0.7		0.5	1.0		0.7		0.9		1.2		1.5	1.6	1.8	2.0
Z2050QPT-B Z2050QPT-D Z2050QPT-F			0.1		2.1	0.7		0.5	1.0		0.7		0.9		1.2		1.5	1.6	1.8	2.0

Dimensions

Туре	DN	Weight	
Z2075QPT-G	20	0.79 lb [0.36 kg]	



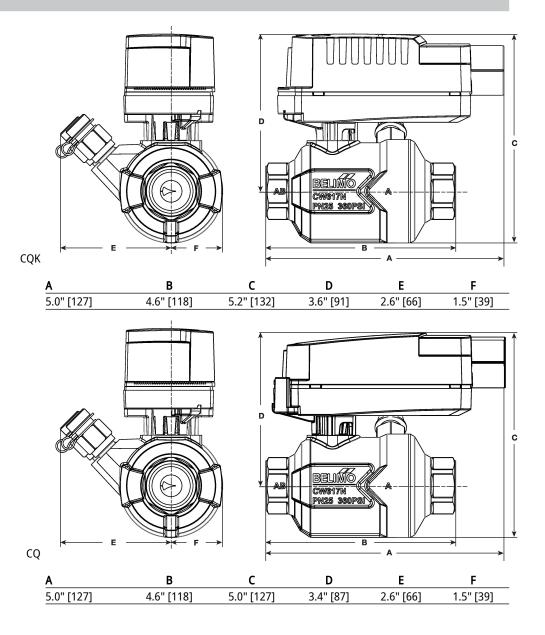



Modulating, Electrical fail-safe, 24 V

- Nominal voltage AC/DC 24 V
- Control Modulating 2...10 V





Technical data

Nominal voltage frequency50/60 HzNominal voltage rangeAC 19.228.8 V / DC 21.628.8 VPower consumption in operation2.5 WPower consumption in rest position0.5 WTransformer sizing5 VAElectrical Connection22 GA plenum cable, 3 ft [1 m], with 1/2" conduit connectorOverload Protectionelectronic thoughout 090° rotationElectrical Protectionactuators are double insulatedFunctional dataOperating range YOperating range Y210 VOperating range Y note420 mA w/ ZG-R01 (500 Ω, 1/4 W resisterPosition feedback U210 VBridging time (PF)2 sPre-charging time520 sAngle of rotation noteadjustable with mechanical stopRunning Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, fail-safe35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULClass 2 SupplyDegree of protection IEC/ENIP40Degree of protection NEMA/ULNEMA 2EnclosureEnclosureUL Enclosure Type 2	Electrical data	Nominal voltage	AC/DC 24 V			
Nominal voltage rangeAC 19.228.8 V / DC 21.628.8 VPower consumption in operation2.5 WPower consumption in rest position0.5 WTransformer sizing5 VAElectrical Connection22 GA plenum cable, 3 ft [1 m], with 1/2" conduit connectorOverload Protectionelectronic thoughout 090° rotationElectrical Protectionactuators are double insulatedFunctional dataOperating range YOperating range Y210 VOperating range Y note420 mA w/ ZG-R01 (500 Ω, 1/4 W resister Position feedback UPre-charging time (PF)2 sPre-charging time520 sAngle of rotation noteadjustable with mechanical stopRunning time fail-safe<60 sNoise level, fail-safe<60 sNoise level, fail-safe35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULClass 2 SupplyDegree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2						
Power consumption in operation2.5 WPower consumption in rest position0.5 WTransformer sizing5 VAElectrical Connection22 GA plenum cable, 3 ft [1 m], with 1/2" conduit connectorOverload Protectionelectronic thoughout 090° rotationElectrical Protectionactuators are double insulatedOperating range Y210 VOperating range Y note420 mA w/ ZG-R01 (500 Ω, 1/4 W resister Position feedback UPre-charging time520 sAngle of rotation noteadjustable with mechanical stopRunning time fail-safe<60 sNoise level, notor35 dB(A)Noise level, notor35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULClass 2 SupplyDegree of protection IEC/ENIP40Degree of protection NEMA/ULNEMA 2EnclosureEnclosureUL Enclosure Type 2						
Power consumption in rest position0.5 WTransformer sizing5 VAElectrical Connection22 GA plenum cable, 3 ft [1 m], with 1/2" conduit connectorOverload Protectionelectronic thoughout 090° rotation Electrical ProtectionElectrical Protectionelectronic thoughout 090° rotation actuators are double insulatedFunctional dataOperating range Y Operating range Y notePosition feedback U210 V Operating time (PF)Pre-charging time520 s Angle of rotation note adjustable with mechanical stop Running Time (Motor)Running Time (Motor)75 s / 90° S / 90°Running time fail-safe<60 s S dB(A) Noise level, fail-safeNoise level, fail-safe35 dB(A) Position indicationPower source UL Degree of protection IEC/ENClass 2 Supply IP40 Degree of protection NEMA/ULNEMA 2 EnclosureUL Enclosure Type 2						
Transformer sizing5 VAElectrical Connection22 GA plenum cable, 3 ft [1 m], with 1/2" conduit connectorOverload Protectionelectronic thoughout 090° rotationElectrical Protectionactuators are double insulatedFunctional dataOperating range YPosition feedback U210 VOperating time (PF)2 sPre-charging time520 sAngle of rotation noteadjustable with mechanical stopRunning Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, notor35 dB(A)Position indicationpointerSafety dataPower source ULClass 2 SupplyDegree of protection NEMA/ULDegree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2		·				
Electrical Connection22 GA plenum cable, 3 ft [1 m], with 1/2" conduit connectorOverload Protectionelectronic thoughout 090° rotation actuators are double insulatedFunctional dataOperating range Y Operating range Y note210 V 210 V Operating time (PF)Pro:charging time (PF) Pre-charging time2 s 520 sAngle of rotation note Running Time (Motor)adjustable with mechanical stop 75 s / 90° Running time fail-safeAngle of rotation Position indication90°Running time fail-safe<60 s 35 dB(A) Position indicationPower source UL Degree of protection IEC/ENClass 2 Supply IP40 Degree of protection NEMA/ULNEMA 2 EnclosureUL Enclosure Type 2		· · ·				
conduit connectorOverload Protectionelectronic thoughout 090° rotationElectrical Protectionactuators are double insulatedFunctional dataOperating range Y210 VOperating range Y note420 mA w/ ZG-R01 (500 Ω, 1/4 W resisterPosition feedback U210 VBridging time (PF)2 sPre-charging time520 sAngle of rotation noteadjustable with mechanical stopRunning Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, motor35 dB(A)Position indicationpointerSafety dataPower source ULPagree of protection IEC/ENIP40Degree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2						
Electrical Protectionactuators are double insulatedFunctional dataOperating range Y210 VOperating range Y note420 mA w/ ZG-R01 (500 Ω, 1/4 W resisterPosition feedback U210 VBridging time (PF)2 sPre-charging time520 sAngle of rotation90°Angle of rotation noteadjustable with mechanical stopRunning Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, motor35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULClass 2 SupplyDegree of protection IEC/ENDegree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2						
Functional dataOperating range Y210 VOperating range Y note420 mA w/ ZG-R01 (500 Ω, 1/4 W resisted Position feedback UPosition feedback U210 VBridging time (PF)2 sPre-charging time520 sAngle of rotation90°Angle of rotation noteadjustable with mechanical stopRunning Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, motor35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULClass 2 SupplyDegree of protection IEC/ENDegree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2		Overload Protection	electronic thoughout 090° rotation			
Operating range Y note420 mA w/ ZG-R01 (500 Ω, 1/4 W resistedPosition feedback U210 VBridging time (PF)2 sPre-charging time520 sAngle of rotation90°Angle of rotation noteadjustable with mechanical stopRunning Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, motor35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULClass 2 SupplyDegree of protection IEC/ENDegree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2		Electrical Protection	actuators are double insulated			
Position feedback U210 VBridging time (PF)2 sPre-charging time520 sAngle of rotation90°Angle of rotation noteadjustable with mechanical stopRunning Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, motor35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULPogree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2	Functional data	Operating range Y	210 V			
Bridging time (PF)2 sPre-charging time520 sAngle of rotation90°Angle of rotation noteadjustable with mechanical stopRunning Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, motor35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULClass 2 SupplyDegree of protection IEC/ENIP40Degree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2		Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)			
Pre-charging time520 sAngle of rotation90°Angle of rotation noteadjustable with mechanical stopRunning Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, motor35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULPower source ULClass 2 SupplyDegree of protection IEC/ENIP40Degree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2		Position feedback U	210 V			
Angle of rotation 90° Angle of rotation note adjustable with mechanical stop Running Time (Motor) 75 s / 90° Running time fail-safe <60 s Noise level, motor 35 dB(A) Noise level, fail-safe 35 dB(A) Position indication pointer Safety data Power source UL Class 2 Supply Degree of protection IEC/EN IP40 Degree of protection NEMA/UL NEMA 2 Enclosure UL Enclosure Type 2		Bridging time (PF)	2 s			
Angle of rotation note adjustable with mechanical stop Running Time (Motor) 75 s / 90° Running time fail-safe <60 s Noise level, motor 35 dB(A) Noise level, fail-safe 35 dB(A) Position indication pointer Safety data Power source UL Class 2 Supply Degree of protection IEC/EN IP40 Degree of protection NEMA/UL NEMA 2 Enclosure UL Enclosure Type 2		Pre-charging time	520 s			
Running Time (Motor)75 s / 90°Running time fail-safe<60 sNoise level, motor35 dB(A)Noise level, fail-safe35 dB(A)Position indicationpointerSafety dataPower source ULClass 2 SupplyDegree of protection IEC/ENIP40Degree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2		Angle of rotation	90°			
Running time fail-safe <60 s Noise level, motor 35 dB(A) Noise level, fail-safe 35 dB(A) Position indication pointer Safety data Power source UL Class 2 Supply Degree of protection IEC/EN IP40 Degree of protection NEMA/UL NEMA 2 Enclosure UL Enclosure Type 2		Angle of rotation note	adjustable with mechanical stop			
Noise level, motor 35 dB(A) Noise level, fail-safe 35 dB(A) Position indication pointer Safety data Power source UL Class 2 Supply Degree of protection IEC/EN IP40 Degree of protection NEMA/UL NEMA 2 Enclosure UL Enclosure Type 2		Running Time (Motor)	75 s / 90°			
Noise level, fail-safe 35 dB(A) Position indication pointer Safety data Power source UL Class 2 Supply Degree of protection IEC/EN IP40 Degree of protection NEMA/UL NEMA 2 Enclosure UL Enclosure Type 2		Running time fail-safe	<60 s			
Position indication pointer Safety data Power source UL Class 2 Supply Degree of protection IEC/EN IP40 Degree of protection NEMA/UL NEMA 2 Enclosure UL Enclosure Type 2		Noise level, motor	35 dB(A)			
Safety data Power source UL Class 2 Supply Degree of protection IEC/EN IP40 Degree of protection NEMA/UL NEMA 2 Enclosure UL Enclosure Type 2		Noise level, fail-safe	35 dB(A)			
Degree of protection IEC/ENIP40Degree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2		Position indication	pointer			
Degree of protection NEMA/ULNEMA 2EnclosureUL Enclosure Type 2	Safety data	Power source UL	Class 2 Supply			
Enclosure UL Enclosure Type 2		Degree of protection IEC/EN	IP40			
		Degree of protection NEMA/UL	NEMA 2			
Agency Listing cULus acc. to UL60730-1A/-2-14, CAN/CS/		Enclosure	UL Enclosure Type 2			
E60730-1:02		Agency Listing				
		Ouglity Chan doug	CE acc. to 2014/30/EU and 2014/35/EU			
Quality Standard ISO 9001		•				
		UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC			
Ambient humidity Max. 95% RH, non-condensing		Ambient humidity	Max. 95% RH, non-condensing			
Ambient temperature 35104°F [240°C]		Ambient temperature	35104°F [240°C]			
Storage temperature -40176°F [-4080°C]		Storage temperature	-40176°F [-4080°C]			



I

Technical data		
Safety data	Servicing	maintenance-free
Weight	Weight	0.55 lb [0.25 kg]
Materials	Housing material	UL94-5VA
Product features		
Application	Electrical fail-safe proportional ZoneTight actu	ator.
	Valve selection should be done in accordance specifications. The actuator is mounted directl additional linkage.	
	The actuator operates in response to a 210 V	, 0.5 10 V or 420mA control signal.
Accessories		

Electrical accessories

 Description
 Type

 Battery backup system, for non-spring return models
 NSV24 US

 Battery, 12 V, 1.2 Ah (two required)
 NSV-BAT

Electrical installation


K INSTALLATION NOTES

(A) Actuators with appliance cables are numbered.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.

Actuators may also be powered by DC 24 V.

S Only connect common to negative (-) leg of control circuits.



- Actuators with plenum cable do not have numbers; use color codes instead.
 - Meets cULus requirements without the need of an electrical ground connection.

Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Wiring diagrams

