
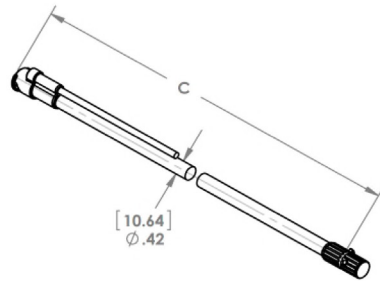


CURRENT TRANSFORMERS

Rope Series

4000, 6000, 8000, and 10,000 Amp Revenue Grade Rogowski Coil Current Transformers with 70mV Output.



SPECIFICATIONS

- Environment:** Indoor Use Only
5 to 176° F (-15 to 80°C)
90% relative humidity
- Wires:** 6', 24 AWG, 600V Rated
- Phase Direction:** Arrow points toward Load
- Secondary Output:** 175mV per 1KA AC @ 60 Hz (unburdened)
- Accuracy:** 0.75% (typical)
- Linearity:** 10%-120%
- Polarity:** Red-Hi, Black-Low
- Frequency range:** 20-400 Hz
- Max Sense Voltage:** 600 Vac
- Approvals:** ETL Listed, CE, RoHS

ROPE SERIES						
Model #	Primary Input (A)	Dimension (A)	Dimension (B)	Dimension (C)	Ratio	Accuracy (%)
ROPE16-040A-07MV	4000	5.0"	5.8"	16"	4000A/70mV	0.75
ROPE24-060A-07MV	6000	7.6"	8.4"	24"	6000A/70mV	0.75
ROPE36-080A-07MV	8000	11.5"	12.3"	36"	8000A/70mV	0.75
ROPE48-100A-07MV	10,000	15.3"	16.1"	48"	10,000A/70mV	0.75