# Lead Free Brass Ball Valve



# 2 Piece • Full Port • Press x Hose Connection • 250 WOG • Stainless Steel Ball and Stem • with Cap and Chain



## P-100HPG

#### Features

- Dezincification resistant brass
- Gland follower and single o-ring stem design
- Blow-out proof stem
- Cap and chain for easy drain & hose connection
- Heavy steel chain
- 100% leak tested
- IAPMO Certified NSF 372
- Wetted surfaces contain less than .25% lead content

#### **Approvals**


Conforms to IAMPO PS 117

### **Pressure/Temperature Rating**

- 250 WOG
- Max. 250° F



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

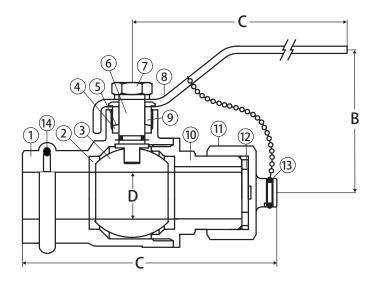

Material Specifications							
No.	Part	Materials					
1	Body	Lead Free Brass - C46500					
2	Seat	PTFE					
3	Ball	304 Stainless Steel					
4	Packing	PTFE					
5	Stem O-Ring	NBR					
6	Stem	304 Stainless Steel					
7	Handle Nut	Steel - Chrome Plated					
8	Handle	Steel - Chrome Plated					
9	Packing Nut	Brass - C37700					
10	End Connection	Lead Free Brass - C46500					
11	Cap Nut	Brass - C37700					
12	Gasket	EPDM					
13	Chain	Steel - Chrome Plated					
14	O-Ring	EPDM					

Material Specifications

Dimensions							
Part No.	Size	Α	В	С	D		
100-673G	1/2" x 3/4" Hose	3.38	1.81	3.46	0.59		
100-674G	3/4" x 3/4" Hose	3.74	2.09	4.29	0.75		